



3051 LEGACY PARK DRIVE, WINDSOR, ON, N8W 5S6

ISSUED FOR CONSTRUCTION	MARCH 18, 2019
ISSUED FOR TENDER	FEBRUARY 11, 2019
ISSUED FOR PERMIT	FEBRUARY 1, 2019




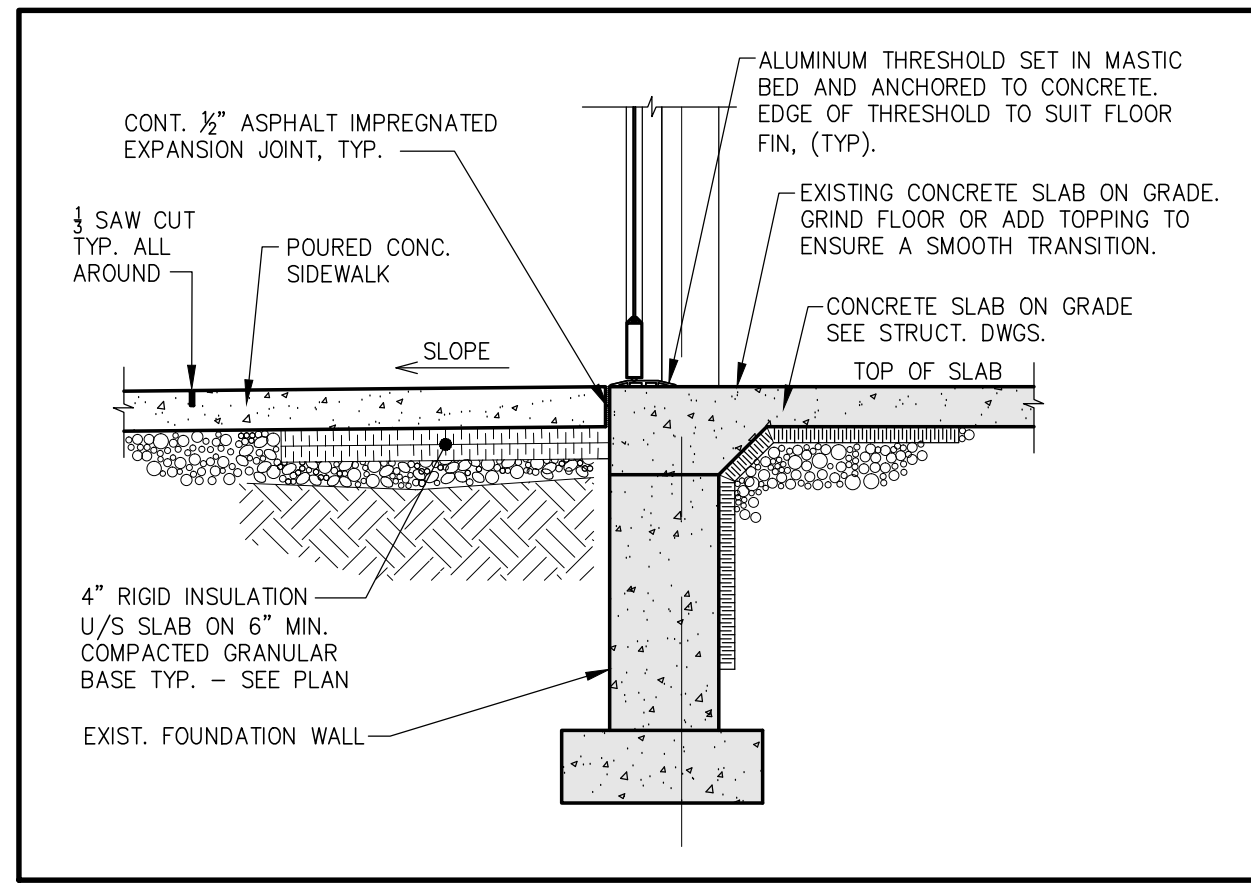


6 SECTION DETAIL @ RIGID INSULATION
SCALE: N.T.S.

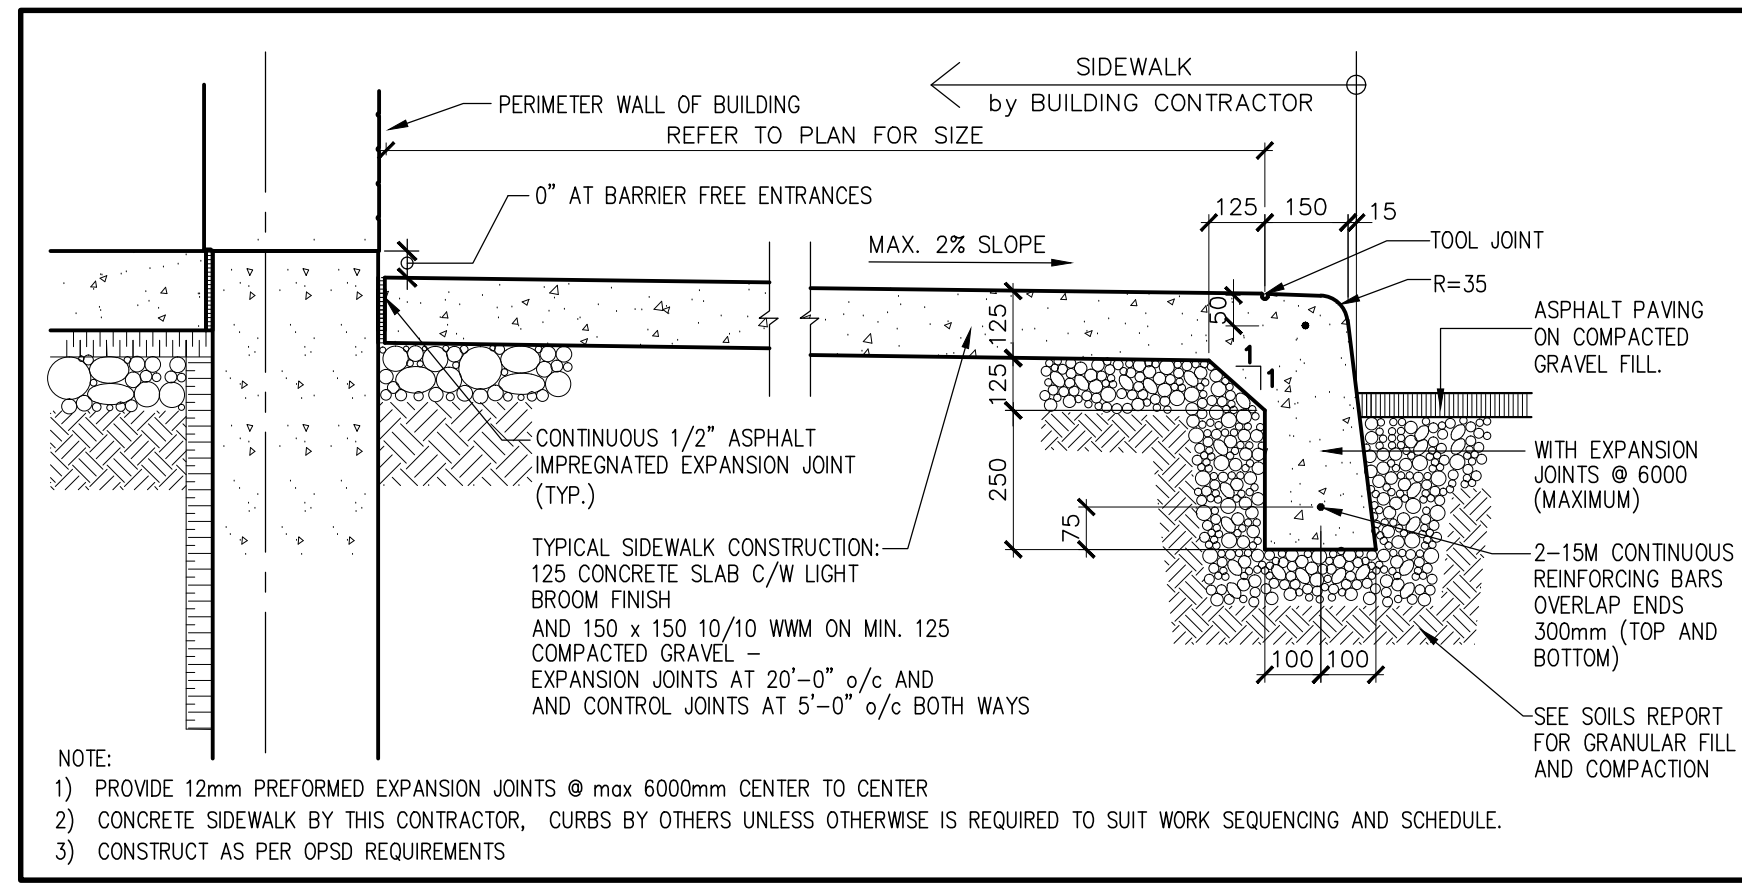


5 TYP. CONCRETE SIDEWALK DETAIL
SCALE: 1" = 1'-0"

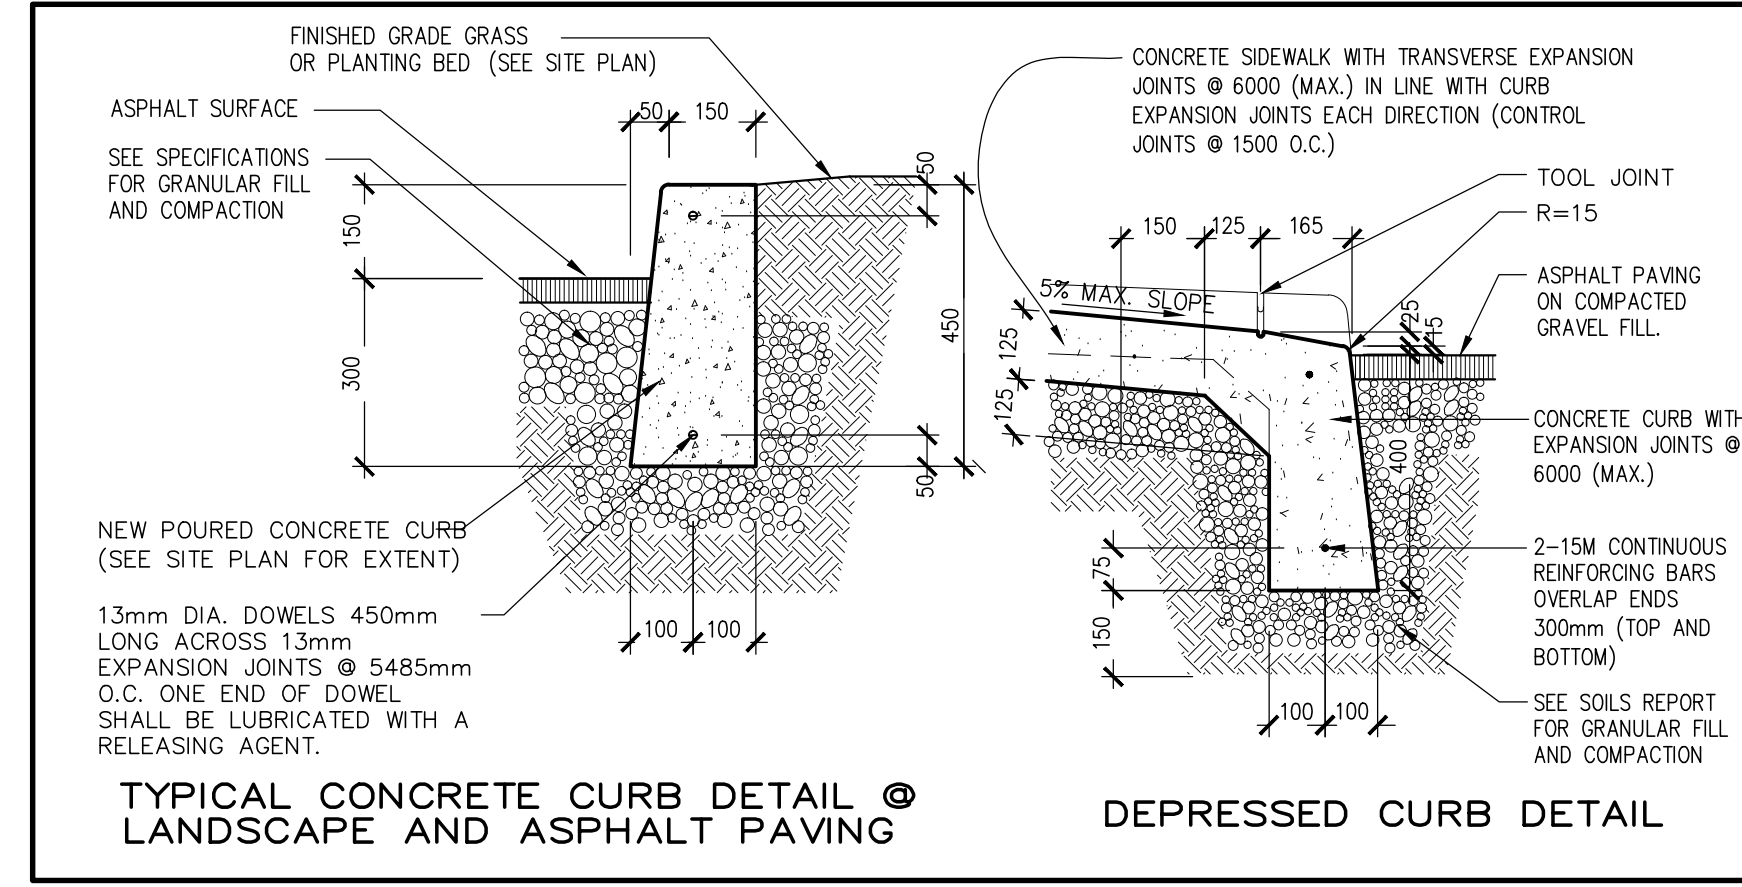


4 TYP. CONCRETE CURB DETAILS
SCALE: 1" = 1'-0"

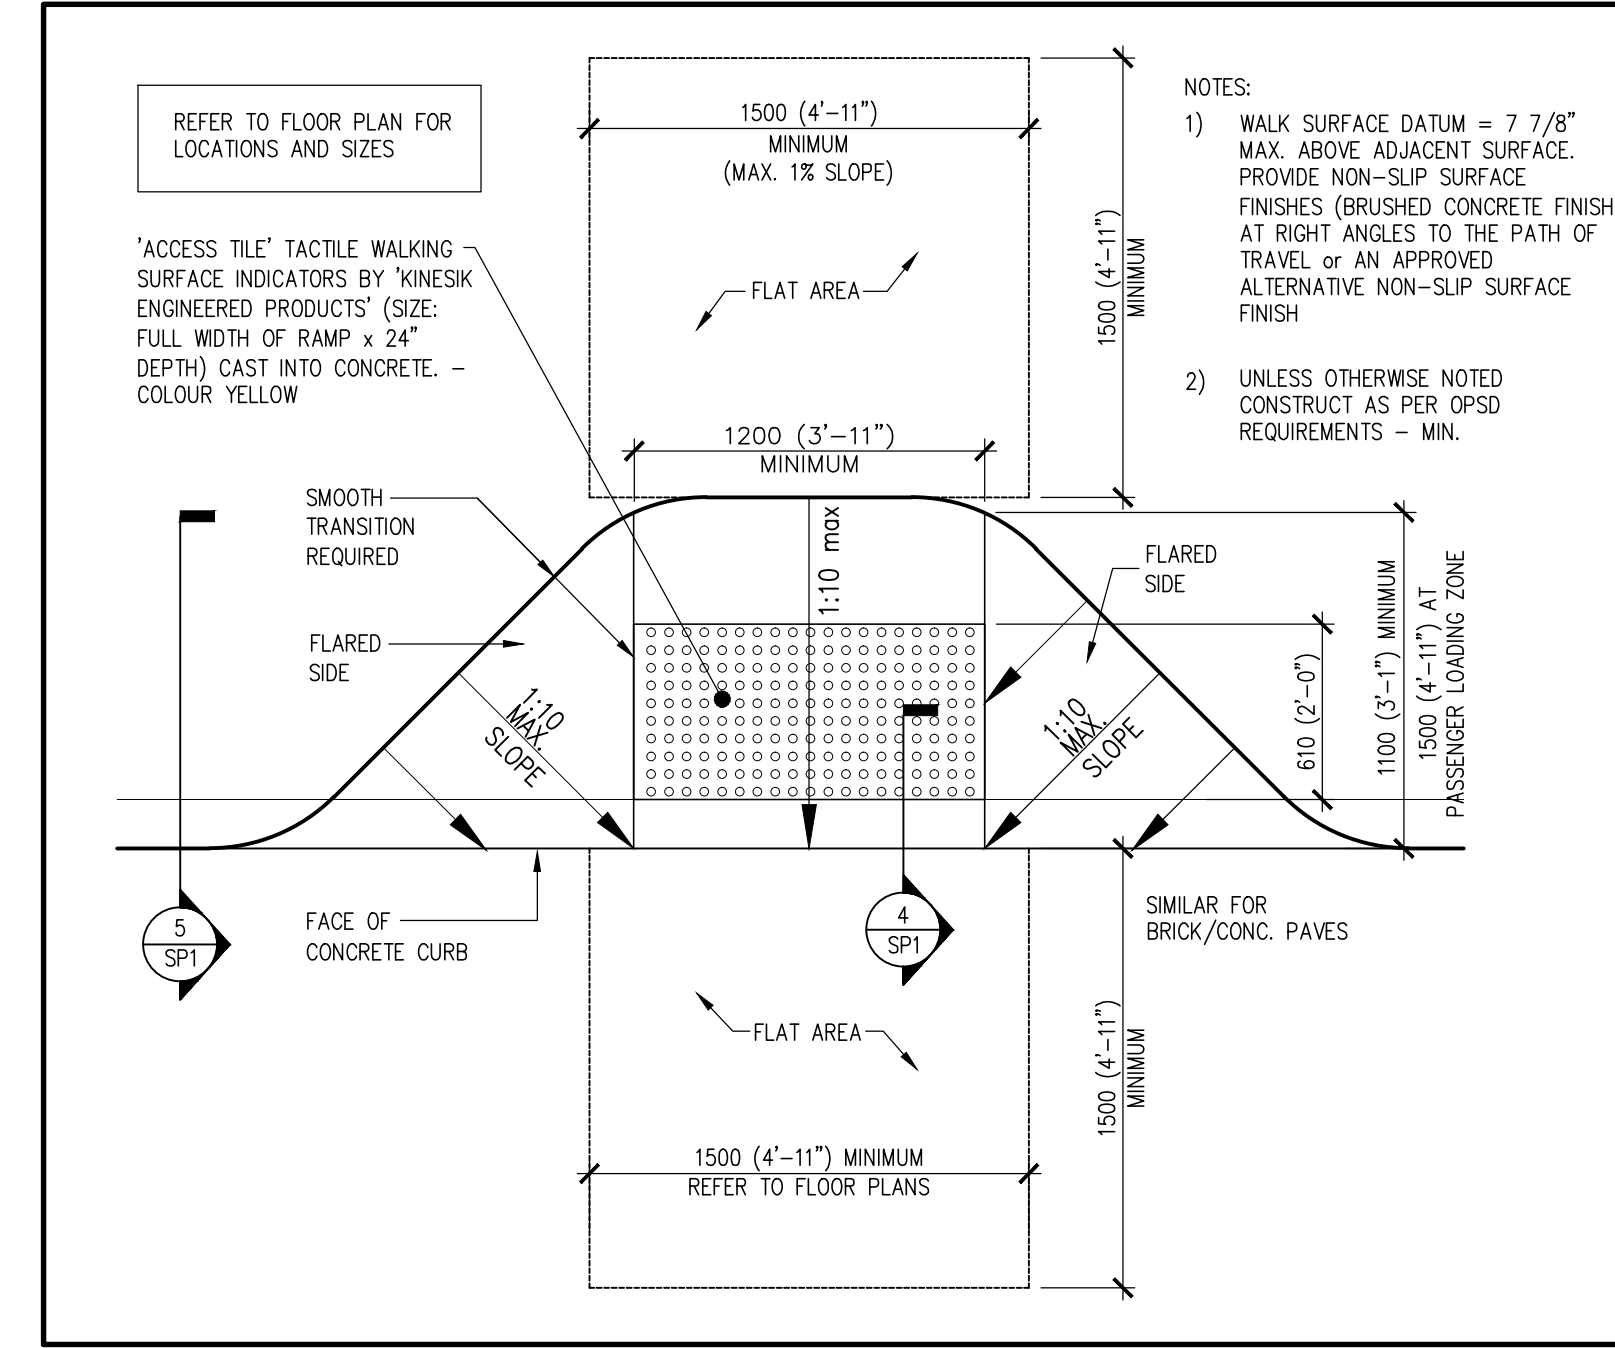

3 TYP. BARRIER-FREE RAMP PLAN
SCALE: N.T.S.

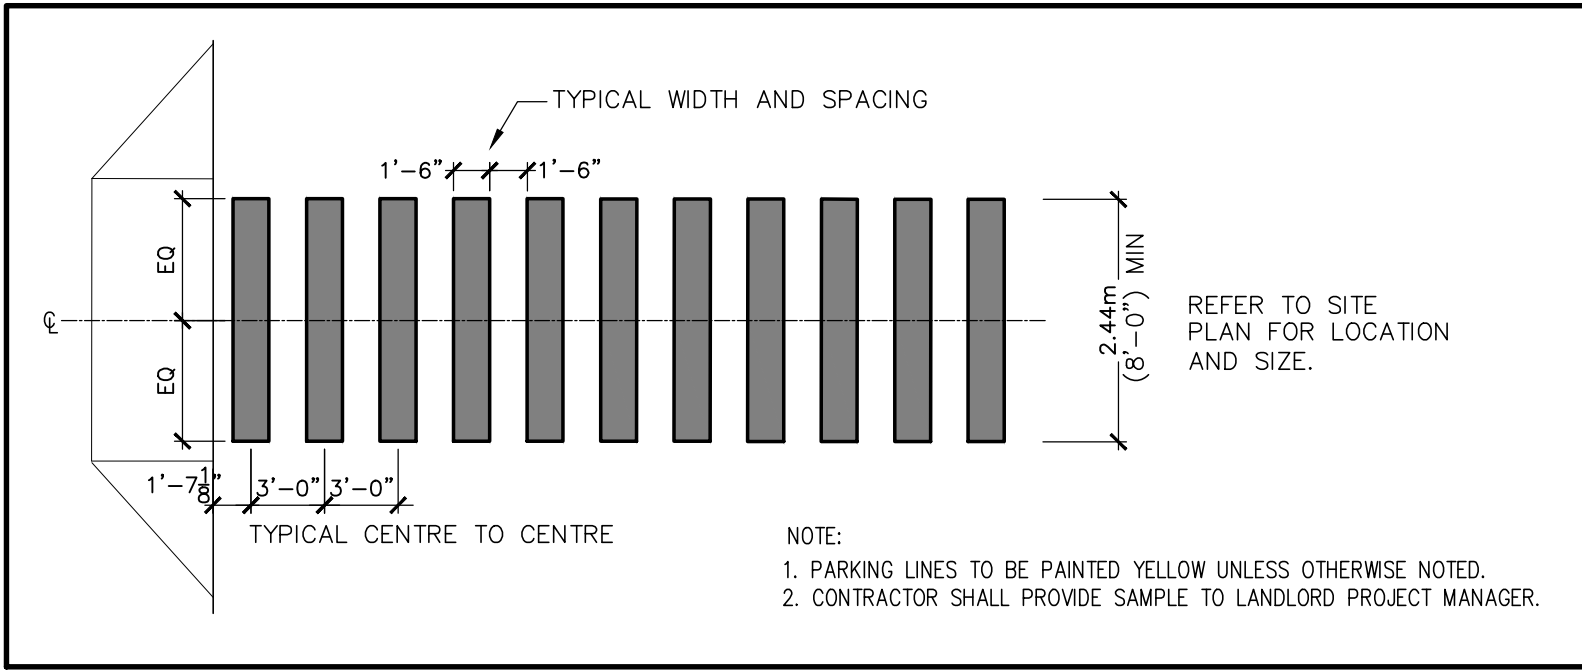

7 TYP. PAINTED CROSSWALKS
SCALE: N.T.S.

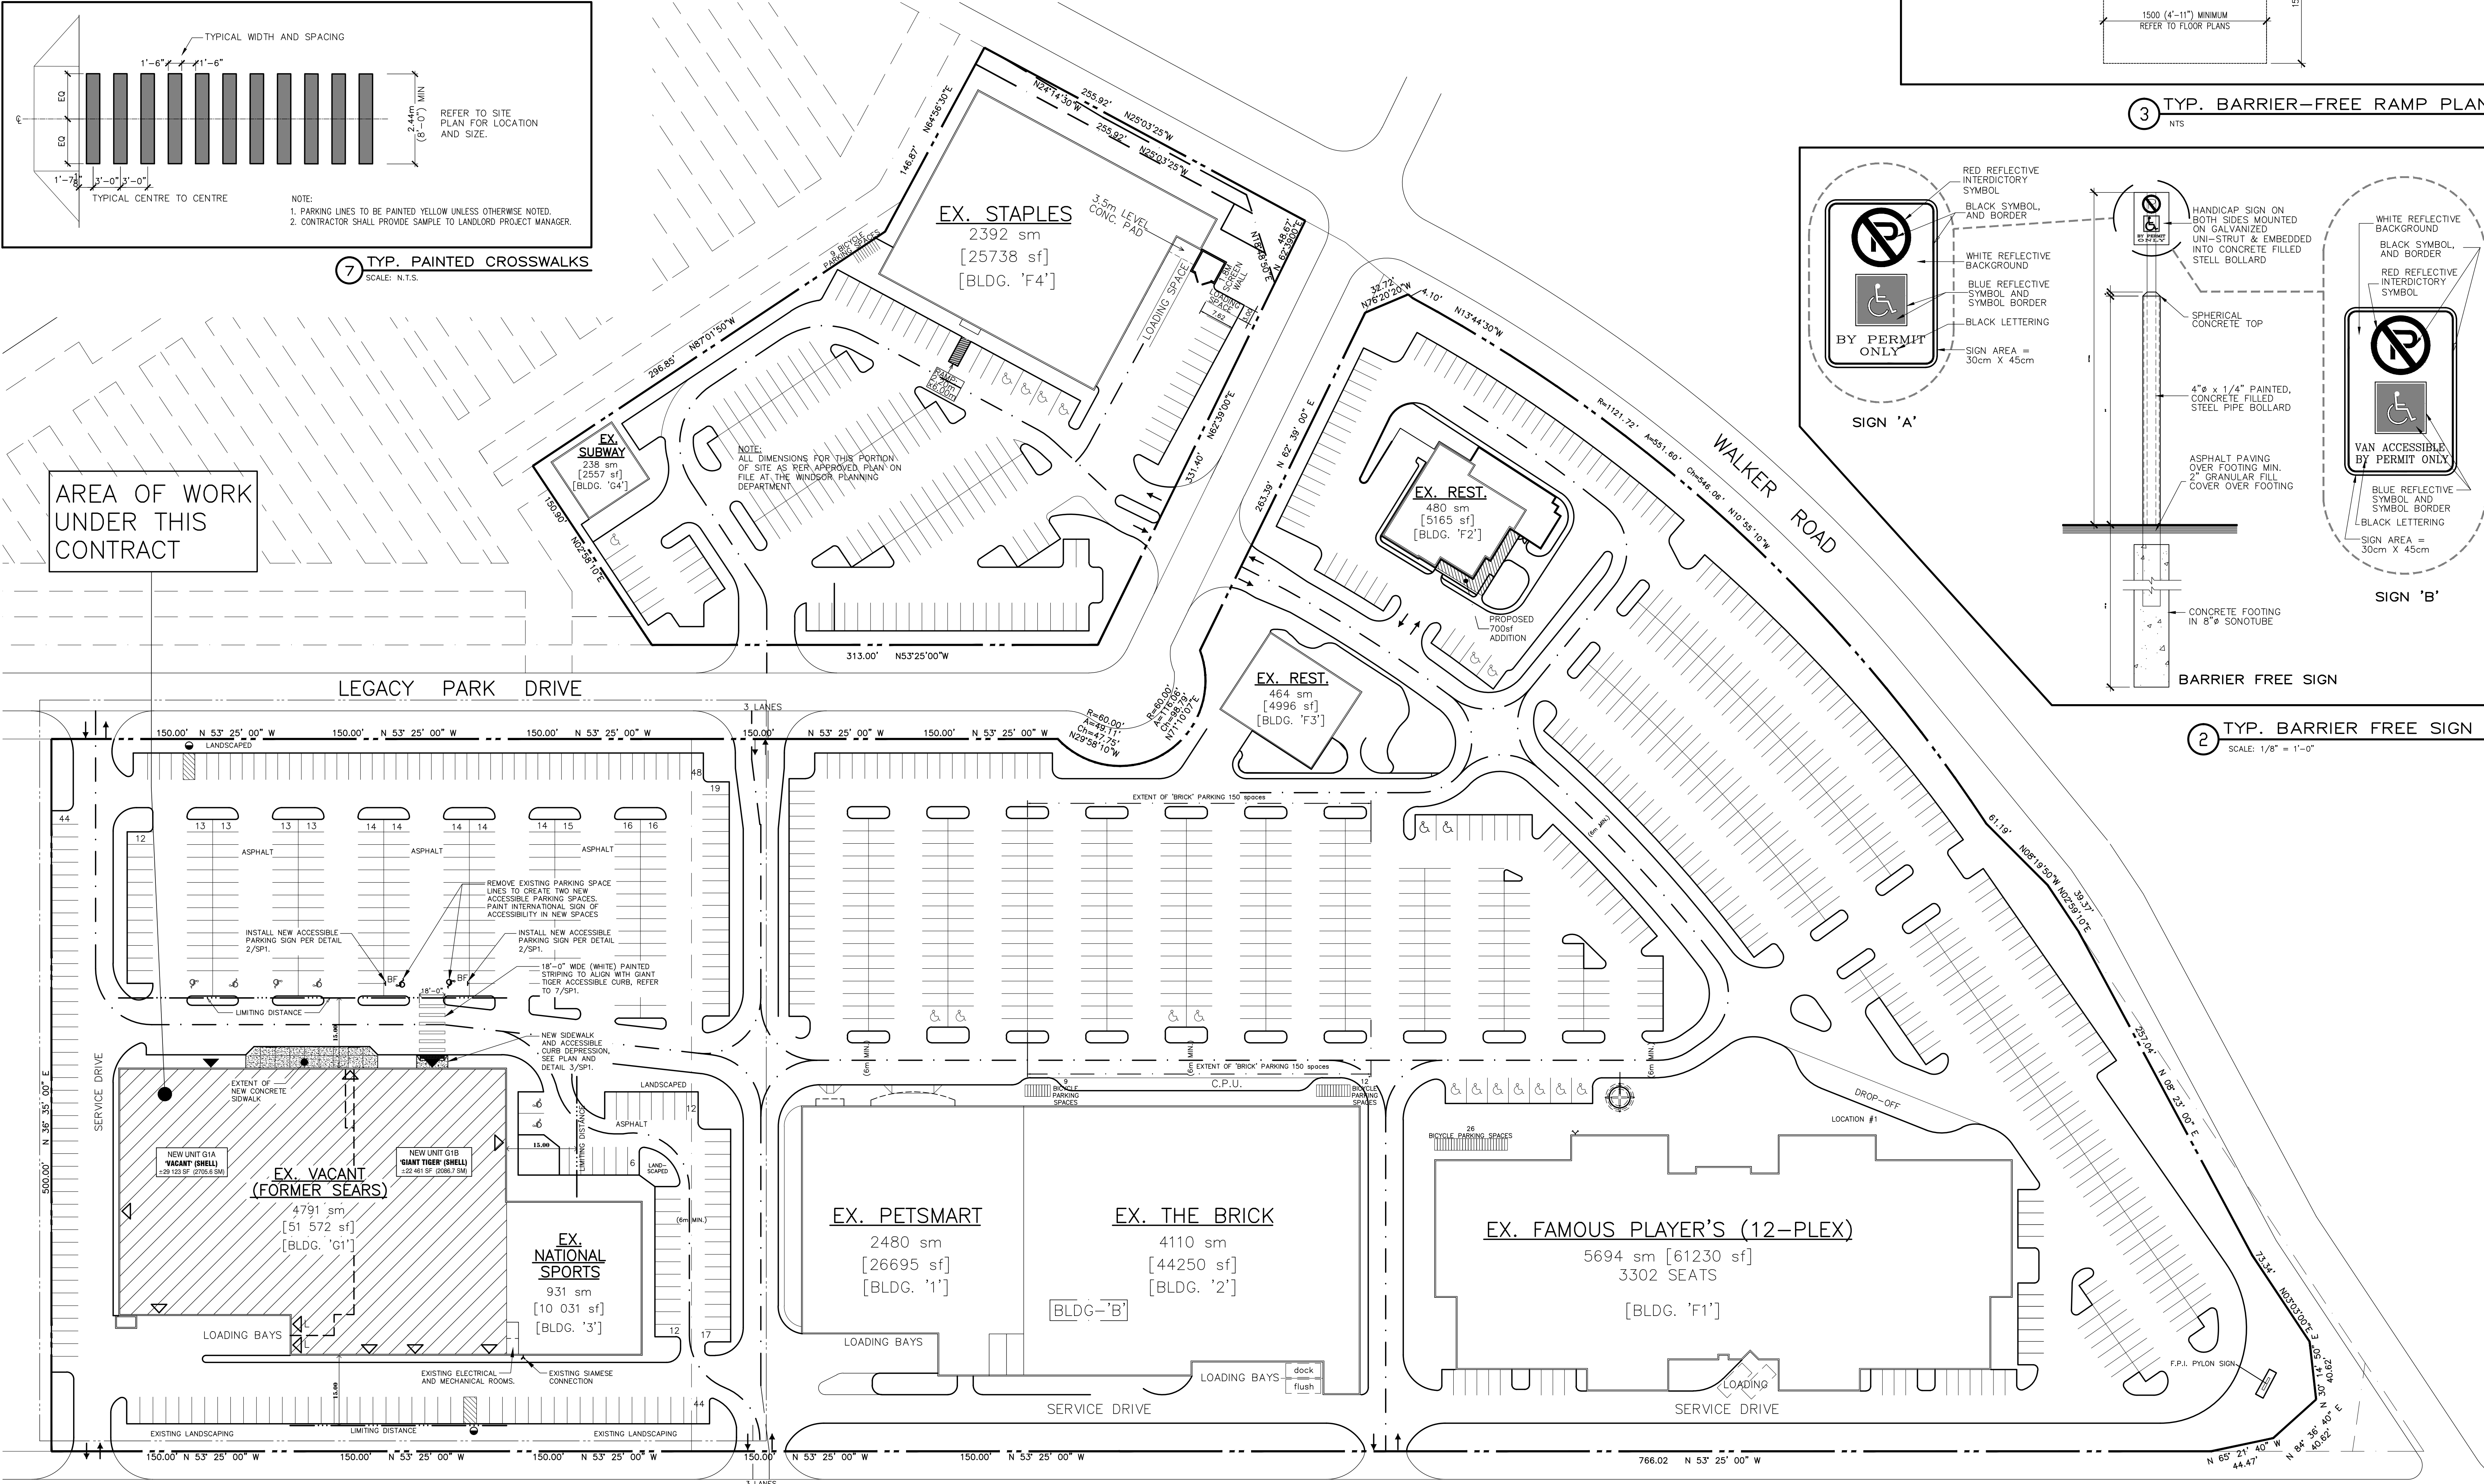

LEGEND

[Symbol]	EXISTING BUILDING(S) TO REMAIN
[Symbol]	AREA OF WORK
[Symbol]	LEGAL DESCRIPTION, PROPERTY LINE (SUBJECT LAND)
[Symbol]	FIRE ROUTE + TRUCK PATH
[Symbol]	LIMITING DISTANCE
[Symbol]	RAISED ISLAND C/W CONCRETE PAVING AND CONCRETE CURBS
[Symbol]	NEW CONCRETE SIDEWALK MONOLITHIC POUR C/W SAWCUTS
[Symbol]	PAINTED PEDESTRIAN CROSSWALK
[Symbol]	BUILDING ENTRY
[Symbol]	BUILDING EXIT
[Symbol]	BUILDING LOADING
[Symbol]	EXISTING FIRE HYDRANT
[Symbol]	BARRIER FREE PARKING

CONCRETE SIDEWALK/WALKWAY/ENTRY RAMP GENERAL NOTES

1. PROTECT CONCRETE PAD FROM DAMAGE AND VANDALISM UNTIL SET. ANY AREAS DAMAGED BY FOOT PRINTS, TIRES AND/OR WRITING IN CONC. SHALL BE BROKEN OUT AND REPLACED AT THE GENERAL CONTRACTOR'S EXPENSE.
2. POURED CONCRETE STRENGTH TO BE 35 Mpa COMPRESSIVE STRENGTH AT 28 DAYS WITH 5% AIR ENTRAINMENT. ENTRAINED TO CDA-A23 CSA-A23 1/A23.2 (REFER TO GROUND FLOOR PLAN A2 AND PROPOSED SITE PLAN SP1 FOR EXACT LOCATIONS AND LENGTH DIMENSIONS)
3. QUALITIES OF THE CEMENT AND AGGREGATES SHALL CONFORM TO C.S.A. SPECIFICATION A-23.1M LATEST REVISION FOR "CONTROLLED CONCRETE".
4. PROVIDE A 26mm BITUMINOUS FIBRE EXPANSION JOINT ALONG THE ADJACENT WALL OF THE BUILDING.
5. PROVIDE A STIFF BROOM FINISH ON THE SURFACE AND HAND TOoled EDGES.
6. SIDEWALK SLOPES TO BE 2% MAX.


NOTE:
ALL DIMENSIONS FOR THIS PORTION OF SITE AS PER APPROVED PLAN ON FILE AT THE WINDSOR PLANNING DEPARTMENT

A2	ISSUED FOR CONSTRUCTION	18 MAR 2019
A2	ISSUED FOR TENDER	11 FEB 2019
A2	ISSUED FOR PERMIT	01 FEB 2019
REV BY	DESCRIPTION	DATE
REVISIONS		

CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS ON SITE. DO NOT SCALE DRAWINGS.

RIO CAN
MANAGEMENT INC.
RIOCAN YONGE EGLINTON CENTRE, 500-2300 YONGE STREET
P.O. Box 2386, TORONTO, ON, M4P 1E4

LEON LUBELSKI ARCHITECTS INC.
1180 YONGE STREET, 11TH FLOOR, TORONTO, ONTARIO M4T 1Y7
416-593-1111

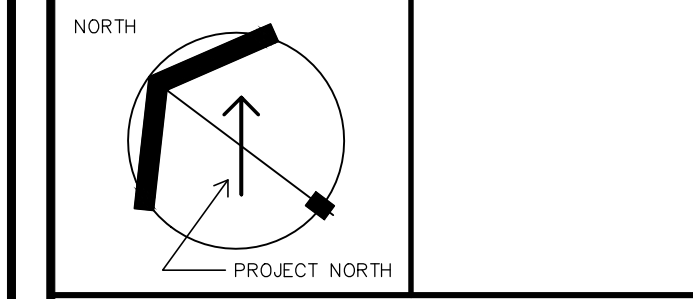

PROJECT: PROPOSED REDEVELOPMENT AT
BUILDING G1 (FORMER SEARS)
3051 LEGACY PARK DRIVE WINDSOR, ON

DRAWING TITLE: **SITE PLAN**

DRAWN BY	COMM. NO.	19-33
CHECKED	A2	DRAWING NO.
SCALE		SP1
DATE	JANUARY 2019	

1 SITE PLAN
SCALE: 1:600

GENERAL NOTES

- IT IS ASSUMED THAT ALL THE CONTRACTORS HAVE CAREFULLY EXAMINED THE SITE AND HAVE FULLY INFORMED THEMSELVES AS TO THE EXISTING CONDITIONS AND LIMITATIONS AND HAVE AGREED IN THEIR PRICE THE COMPLETE COST OF THIS WORK.
- THE CONTRACTOR SHALL ASSUME ALL THE RESPONSIBILITIES AND LIABILITIES AS AN EMPLOYER AS TO WORKMEN'S COMPENSATION, UNEMPLOYMENT INSURANCE AND ALL THE OTHER TAXES AND SOCIAL SECURITY ASSESSMENTS THAT MAY BE LAYED BY LAW UPON THE PROPERTY OR OPERATION OF THE CONTRACTOR AND HIS SUB-CONTRACTORS.
- WITHOUT RESTRICTING THE INTENT OF CG 11.1.1, THE CONTRACTOR SHALL MAINTAIN AT HIS OWN EXPENSE, COMPREHENSIVE GENERAL LIABILITY INSURANCE TO THE AMOUNT OF NOT LESS THAN FIVE MILLION DOLLARS (\$5,000,000.00) FOR ANY ONE OCCURRENCE FOR BODILY INJURY, PROPERTY DAMAGE OR DEATH. SUCH POLICY SHOULD NAME THE OWNER AND THE CONSULTANTS AS ADDITIONAL INSURED AND SHALL INCLUDE A CROSS LIABILITY AND SEVERABILITY OF INTEREST CLAUSE, THE DEDUCTIBLE AMOUNTS OF THE INSURANCE SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. THE CONTRACTOR SHALL PROVIDE EVIDENCE OF SUCH INSURANCE IN A FORM ACCEPTABLE TO THE OWNER PRIOR TO CONSTRUCTION START.
- THE CONTRACTOR SHALL, TO THE FULL EXTENT PERMITTED BY LAW, OBTAIN ALL NECESSARY PERMITS AND SAVE HARMLESS THE OWNER AND THE CONSULTANTS AND THEIR RESPECTIVE DIRECTORS, OFFICERS, PARTNERS, EMPLOYEES AND AGENTS FROM ALL CLAIMS, DEMANDS, LOSSES, COSTS, DAMAGES, ACTIONS, SUITS OR PROCEEDINGS BROUGHT OR INCURRED BY ANY PARTY, INCLUDING THE OWNER, TO ARISE OUT OF THE PERFORMANCE OR THE FAILURE TO PERFORM THE WORK, OR OUT OF THE CONDITION OF THE WORK, THE USE SITE, OR THE WORK, THE DRIVEWAYS, STREETS OR ALLEYS USED IN CONNECTION WITH THE PERFORMANCE OF THE WORK.
- THE CONTRACTORS ARE RESPONSIBLE TO GIVE ALL NOTICES, OBTAIN PERMITS AND APPROVALS, AND ARRANGE FOR INSPECTION OF WORK BY INSPECTION AUTHORITIES, AND PAY ALL FEES IN ORDER THAT THE WORK MAY BE CARRIED OUT AND COMPLETED ON SCHEDULE. THE OWNER SHALL APPLY AND PAY FOR THE BUILDING PERMIT.
- FOR THE PURPOSE OF THIS PROJECT THE CONTRACTOR SHALL ASSUME ALL THE RESPONSIBILITIES OF THE PERSON TO WHOM A PERMIT IS ISSUED AND SHALL NOTIFY THE CHIEF BUILDING OFFICER (OR REGISTERED CODE AGENCY) OF THE FOLLOWING PHASES OF CONSTRUCTION AS APPLICABLE TO THIS PROJECT:
 - (a) READINESS TO CONSTRUCT FOOTINGS;
 - (b) SUBSTANTIAL COMPLETION OF FOOTINGS AND FOUNDATIONS PRIOR TO COMMENCEMENT OF BACKFILLING;
 - (c) SUBSTANTIAL COMPLETION OF STRUCTURAL FRAMING & DUCTWORK & PIPING FOR HEATING & AIR-CONDITIONING SYSTEMS, IF THE BUILDING IS WITHIN THE SCOPE OF PART 9;
 - (d) SUBSTANTIAL COMPLETION OF STRUCTURAL FRAMING & ROUGH-IN OF HVAC & AIR-CONTAMINANT EXTRACTION EQUIPMENT, IF THE BUILDING IS NOT A BUILDING TO WHICH CLAUSE (c) APPLIES;
 - (e) SUBSTANTIAL COMPLETION OF INSULATION, VAPOR BARRIERS & AIR BARRIERS;
 - (f) SUBSTANTIAL COMPLETION OF ALL REQUIRED FIRE SEPARATIONS, EXHAUST SYSTEMS, SMOKE EXHAUST, PROTECTION SYSTEMS INCLUDING STAIRWELL, SPRINKLER, FIRE ALARM & EMERGENCY LIGHTING SYSTEMS;
 - (g) SUBSTANTIAL COMPLETION OF FIRE ACCESS ROUTES;
 - (h) READINESS FOR INSPECTION & TESTING OF:
 - (i) BUILDING SEWERS & BUILDING DRAINS;
 - (ii) WATER SERVICE MAINS;
 - (iii) FIRE SERVICE PIPES;
 - (iv) DRAINAGE SYSTEMS & VENTING SYSTEMS;
 - (v) THE WATER DISTRIBUTION SYSTEM;
 - (vi) PLUMBING FIXTURES & PLUMBING APPLIANCES;
 - (i) READINESS FOR INSPECTION OF STRUCTURAL & GRAVITY OUTLETS, COVERS, AND FOR PIPING SERVING OUTLETS OF AN OUTDOOR POOL;
 - (j) SUBSTANTIAL COMPLETION OF THE REGULATION/REGULOCULATION SYSTEM OF AN OUTDOOR POOL;
 - (k) READINESS TO CONSTRUCT THE SEWAGE SYSTEM;
 - (l) SUBSTANTIAL COMPLETION OF THE INSTALLATION OF THE SEWAGE SYSTEM BEFORE THE COMMENCEMENT OF BACKFILLING;
 - (m) SUBSTANTIAL COMPLETION OF INSTALLATION OF PLUMBING NOT LOCATED IN A STRUCTURE, BEFORE THE COMMENCEMENT OF BACKFILLING;
 - (n) COMPLETION OF CONSTRUCTION OF INSTALLATION OF COMPONENTS REQUIRED TO PERMIT THE ISSUE OF AN OCCUPANCY PERMIT OR TO PERMIT PROCEEDANCE OF THE BUILDING OR PART OF THE BUILDING TO BE OCCUPIED IS NOT FULLY COMPLETED.IN ADDITION THE FOLLOWING PHASES WERE REQUIRED BY THE MUNICIPALITY AS APPLICABLE:
 - (a) COMMENCEMENT OF CONSTRUCTION OF THE BUILDING;
 - (b) SUBSTANTIAL COMPLETION OF STRUCTURAL FRAMING FOR EACH STORY, IF THE BUILDING IS A TYPE OF BUILDING THAT IS WITHIN THE SCOPE OF PARTS OF THIS CODE OTHER THAN PART 9;
 - (c) COMMENCEMENT OF CONSTRUCTION OF:
 - (i) MASONRY FIREPLACES AND MASONRY CHIMNEYS;
 - (ii) FACTORY-BUILT FIREPLACES & ALLIED CHIMNEYS;
 - (iii) STOVES, RANGES, SPACE HEATERS & ADD ON FURNACES USING SOLID FUELS & ALLIED CHIMNEYS;
 - (d) SUBSTANTIAL COMPLETION OF INTERIOR FINISHES;
 - (e) SUBSTANTIAL COMPLETION OF HEATING, VENTILATING, AIR-CONDITIONING, AND AIR-CONTAMINANT EXTRACTION EQUIPMENT;
 - (f) SUBSTANTIAL COMPLETION OF EXTERIOR CLADDING;
 - (g) SUBSTANTIAL COMPLETION OF SITE GRADING;
 - (h) SUBSTANTIAL COMPLETION OF THE POOL DECK & DRESSING ROOMS FOR A PUBLIC POOL, OR PUBLIC SPA & READINESS FOR INSPECTION OF THE EMERGENCY STOP SYSTEM FOR A PUBLIC POOL OR PUBLIC SPA;
 - (i) COMPLETION & AVAILABILITY OF DRAWINGS OF THE BUILDING AS CONSTRUCTED.- ALL WORK, ALL SYSTEMS AND ANY PARTS WHICH FORM A PART OF THE SYSTEM, SHALL BE INSTALLED TO CONFORM TO STRIP DRAWINGS WITH THE NATIONAL BUILDING CODE OF CANADA, THE ENVIRONMENT, MINISTRY OF LABOUR, NFPA - 130 REG 815, ALL AUTHORITIES HAVING JURISDICTION, AND ALL REQUIREMENTS AS REQUIRED BY UL/ALI DESIGNS.
- ALL MATERIALS AND EQUIPMENT SHALL BE NEW (UNLESS OTHERWISE NOTED), CSA APPROVED, BEAR CSA STAMP, BE OF COMMERCIAL GRADE AND INSTALLED IN STRICT ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROPER PERFORMANCE OF THE WORK AND FOR MATERIALS AND WORKSMANSHIP WHICH IN THE OPINION OF THE CONSULTANTS IS FAULTY OR DO NOT COMPLY WITH THE DOCUMENTS AND WHICH, OR THE EFFECT OF WHICH, APPEAR TO ARISE PRIOR OR DURING THE PERIOD OF ONE YEAR, THE CONTRACTOR SHALL PROMPTLY AND AT HIS OWN EXPENSE REMEDY AND MAKE GOOD ANY DEFECTS AND DEFICIENCIES DUE TO CONSTRUCTION AND/OR DEFECTIVE MATERIALS OR DAMAGE TO OTHER WORK OR PROPERTY OR TO PERSONS RESULTING THEREFROM WHICH OR THE EFFECT OF WHICH, SHALL APPEAR TO ARISE EITHER PRIOR OR DURING SUCH PERIOD OF ONE YEAR, UNLESS ELSEWHERE IS NOTED OTHERWISE.
- IT SHOULD BE NOTED THAT THIS LOCATION IS AN OPERATING SHOPPING CENTRE, PUBLIC SAFETY AND THE UNDISTURBED BUSINESS OPERATION OF ALL THE TENANTS SHOULD BE A MAJOR CONCERN AND MUST NOT BE JEOPARDIZED AT ANY TIME DURING ALL PHASES OF CONSTRUCTION. PROVIDE ACCESS FOR EMERGENCY VEHICLES AT ANY TIME AS REQUIRED BY AUTHORITIES HAVING JURISDICTION AND THE LANDLORD.

- REPLACE, AND OTHERWISE MAKE GOOD, DAMAGED WORK AND ALL EXISTING SURFACES, MATERIALS AND EQUIPMENT EFFECTED BY THIS WORK. PATCHING OR REPAIRS OF DAMAGED WORK SHALL BE DONE IN ACCORDANCE WITH THE SUB-CONTRACTOR UNDER WHOM THE WORK WAS ORIGINALLY EXECUTED OR WHOM THE WORK IS EFFECTED, AT THE EXPENSE OF THE SUB-CONTRACTOR WHO CAUSED THE DAMAGE. CUTTING AND PATCHING FOR Holes REQUIRED BY MECHANICAL AND ELECTRICAL PLUMBING AND ALL THE OTHER TRADES WHO HAVE PERFORMED THE ORIGINAL WORK AND PAID BY THE CONTRACTOR REQUIRING THE WORK.
- IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO ENFORCE THE PROTECTION METHODS, GOOD HOUSEKEEPING AND ADHERENCE TO OCCUPATIONAL HEALTH AND SAFETY ACT, WORKERS' COMPENSATION BOARD REGULATIONS, LOCAL AND UNDERWRITERS FIRE REGULATIONS AND THE REQUIREMENTS OF ALL OTHER AUTHORITIES HAVING JURISDICTION.
- THE CONTRACTOR SHALL PROVIDE UL APPROVED AND FIRE EXTINGUISHERS OTHER FIRE FIGHTING SERVICES AND EQUIPMENT (EXCEPT WHERE MORE EXPLOIT REQUIREMENTS ARE THE RESPONSIBILITY OF THE INDIVIDUAL SUB-CONTRACTORS) AND FIRST AID EQUIPMENT AND PERSONNEL.
- ALLOW FOR CLEANING BY SKILLED CLEANING SPECIALISTS ON COMPLETION OF CONSTRUCTION REPAIRS, REPAIRS AND MAKE GOOD DEFECTS BEFORE COMMENCEMENT OF FINAL CLEANING. REPLACE MIRRORS, GLASS, ETC. THAT HAVE BEEN DAMAGED OR DAMAGED DURING CONSTRUCTION, OR WHICH ARE OTHERWISE DEFECTIVE. FINAL CLEANING OF THE ENTIRE WORK AREA SHALL INCLUDE: WASHING MIRRORS AND POLISHING POLISHED GLASS, MIRRORS, PORCELAIN ENAMEL ETC. VACUUM CLEANING, CARPETS AND WALLS; CLEANING OF MIRRORS, MECHANICAL FIXTURES, LIGHT FIXTURES, ETC.; REMOVING OF VISIBLE LABELS LEFT ON MATERIALS, COMPONENTS AND EQUIPMENT.
- SUBMIT SHOP DRAWINGS-FLOOR (4) PAPER COPIES, REVIEWED, SIGNED & SEALED BY GENERAL CONTRACTOR (NO ELECTRONIC SUBMISSIONS) ACCEPTED AS REQUIRED BY THIS WORK, BY THE CONSULTANTS OR BY AUTHORITIES HAVING JURISDICTION. SHOP DRAWINGS NOT REVIEWED BY THE GENERAL CONTRACTOR WILL BE RETURNED NOT REVIEWED, AND REJECTED. THE GENERAL CONTRACTOR SHALL CHECK SIGN AND MAKE NOTATIONS IF HE CONSIDERS NECESSARY ON SHOP DRAWINGS BEFORE EACH SUBMISSION TO CONSULTANTS. SHOP DRAWING REVIEW BY CONSULTANTS FOR THE SOLE PURPOSE OF ASCERTAINING CONFORMANCE WITH THE GENERAL PHASES OF CONSTRUCTION AS APPLICABLE TO THIS OVERSIGHT OR ERROR. THIS REVIEW SHALL NOT MEAN THAT THE CONSULTANT APPROVES THE DETAIL DESIGN OR THE CONSTRUCTION OF FOOTINGS AND FOUNDATIONS FOR WHICH SHALL REMAIN WITH THE CONTRACTOR SUBMITTING SAME, AND SUCH REVIEW SHALL NOT RELIEVE THE CONTRACTOR OF HIS RESPONSIBILITY FOR ERRORS, OMISSIONS OR MEETING ALL OF THE REQUIREMENTS OF HIS CONTRACT.
- SHOP DRAWINGS ARE TO BEAR THE SEAL OF A P.E.N.C. PRACTICING IN THE PLACE OF WORK, OR WHERE PLANS & SERVICES ARE REQUIRED AS PART OF CONTRACTORS' WORK. PROVIDE COVERAGE OF INSURANCE CERTIFICATES SHOWING EOE COVERAGE OF EACH ENGINEER AS PERTINENT TO THIS PROJECT.
- ARCHITECTURAL LAYOUT DIMENSIONS: SHOWN ON CONSULTANT DRAWINGS ARE FOR GENERAL REFERENCE ONLY. IN CASE OF CONFLICT IN LAYOUT INFORMATION BETWEEN ARCHITECTURAL AND CONSULTANTS' DRAWINGS, ARCHITECTURAL DRAWINGS SHALL APPLY AND GOVERN. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO ENSURE THAT SUCH CONFLICTS (SUCH AS PARTITIONS, WALLS, CAST-IN-TOE FLOOR GRILLS/TRENCH/DEPRESSION IN SLAB ON GRADE, ETC) COMPLY WITH THE REQUIREMENTS OF THE FINISHED PRODUCT, AS SHOWN ON CONSULTANT DRAWINGS.
- CONTRACT CLOSEOUT:
 - PROVIDE TWO COPIES OF OPERATING AND MAINTENANCE DATA PREPARED ON 8.5" X 11" SHEETS WITH LANS, BY-LAWS AND REGULATION WHICH REQUIRE SPECIAL MAINTENANCE OR OPERATING PROCEDURES, INCLUDING THE FOLLOWING IN EACH MANUAL OF THE TWO: NAMES AND ADDRESSES OF CONTRACTORS & SUBCONTRACTORS, LIST OF SUPPLIERS WITH ADDRESSES AND TELEPHONE NUMBERS; 24 HR. EMERGENCY TELEPHONE NUMBERS FOR PLUMBING, HEATING, AIR CONDITIONING AND ELECTRICAL; COPY OF FINISH HARDWARE LIST WITH ALL AMENDMENTS AND REVISIONS AND LOCK MANUFACTURER'S DESCRIPTIVE AND SERVICE LITERATURE, MAINTENANCE INSTRUCTIONS FOR ALL FINISHED SURFACES, BROCHURES AND CUTS OF ALL FIXTURES AND EQUIPMENT; OPERATING AND MAINTENANCE OF ALL EQUIPMENT; OTHER DATA REQUIRED ELSEWHERE IN DOCUMENTS OR DEEMED NECESSARY BY CONSULTANTS.
 - PROVIDE ONE COPY OF THE FOLLOWING EXECUTED BY DETAILING SHOP CONTRACTOR AND SIGNED BY STATUTORY DECLARATION AND DECLARATION OF LAST SUPPLY: WORKMEN'S COMPENSATION BOARD CERTIFICATE OF APPROVAL OF THE WORK BY THE LOCAL BUILDING DEPARTMENT; OCCUPANCY PERMIT (IF REQUIRED); ELECTRICAL, MECHANICAL, FIRE ALARM, ETC. CLEAR OF VERIFICATION CERTIFICATE (IF REQUIRED).
- CONTRACT DRAWINGS: UPON COMPLETION OF WORK, OBTAIN FROM CONSULTANT A CD WITH DRAWING FILES OF CONTRACT DOCUMENTS IN AUTOCAD 2000.
- TRANSFER RECORD INFORMATION COMING DURING CONSTRUCTION TO COMPUTER DRAWING FILES AND SUBMIT 2 COPIES FOR REVIEW BY CONSULTANTS.
- PROVIDE AS BUILT SITE SURVEY SHOWING BUILDING LOCATION, PREPARED AND CERTIFIED BY A LAND SURVEYOR LICENSED IN THE PLACE OF WORK.
- PARTIAL OCCUPANCY: THE OWNERS RESERVE THE RIGHT TO INSTALL FURNISHING AND EQUIPMENT IN PART OF THE BUILDING THAT IS COMPLETED PRIOR TO THE DATE OF SUBSTANTIAL PERFORMANCE.
- DEFICIENCIES AND INCOMPLETE WORK: ALL DEFICIENCIES AND/OR OUTSTANDING WORK, INCLUDING OR OUTSTANDING WORK, INCLUDING WARRANTIES AND DOCUMENTATION REQUIRED SHALL BE COMPLETED BY THE CONTRACTOR WITHIN TWENTY (20) DAYS AFTER SUBSTANTIAL PERFORMANCE HAS BEEN ACHIEVED. IF THE CONTRACTOR FAILS TO ACHIEVE TOTAL PERFORMANCE IN SIXTY (60) DAYS, THE ABOVE-MENTIONED FUNDS WITHDRAWN FROM FINAL PAYMENT SHALL INCLUDE THE VALUE OF OUTSTANDING WORK PLUS THE ADDITIONAL EXPENSES OF THE CONSULTANTS FOR COORDINATION AND ADMINISTRATION.
- TONG Moulds: THE CONTRACTOR AND ALL TRADES WORKING ON THIS PROJECT MUST GET FAMILIAR AND STRICTLY FOLLOW THE STANDARD CONSTRUCTION DOCUMENT 84-2004 Mould GUIDELINES FOR THE CONSTRUCTION INDUSTRY. IN ADDITION, THE CONTRACTOR SHALL COMPLY WITH THE FOLLOWING PROCEDURES:
 - 176a. THE CONTRACTOR SHALL REMEDY ANY CONDITIONS DURING CONSTRUCTION THAT MAY BE THE POTENTIAL FOR TOXIC MOULD. IN THE EVENT WHERE A BUILDING OR ASSEMBLIES ARE LEFT OPEN DURING CONSTRUCTION AND/OR ARE EXPOSED TO DRY DRIVEN RAIN WHERE WATER CAN BECOME TRAPPED WITH BUILDING MATERIALS, THE CONTRACTOR SHALL REPLACE WETTED MATERIALS AND MAKE SURE OTHER MATERIALS ARE COMPLETELY DRY AND IN SUITABLE CONDITION BEFORE THE BUILDING OR ASSEMBLIES ARE SEALED UP (i.e. WEET EXTERIOR DRAINAGE SHEATHING, WEET INSULATION, CONSTRUCTION DEBRIS LEFT WITHIN EXTERIOR SUB WALL CAVITY, ETC).
 - 176b. WHERE ALL OR PART OF AN EXISTING BUILDING IS TO REMAIN, IN A REDEVELOPMENT PROJECT, THE CONTRACTOR SHALL, IN ADDITION TO ALL EXISTING VAPOR/CURB AND SO AS TO BE FREE FROM DUST AND

DEBRIS.

- REMOVE AND REPLACE ANY BUILDING COMPONENTS/MATERIALS SUSCEPTIBLE TO OR SHOWING SIGNS OF MOULD GROWTH (i.e. REPLACE WEET OR CONTAMINATED MATERIALS WITH DRYWALL, INSULATION, CEILING TILES, PLASTER, WOOD, ETC) REMOVAL OF IDENTIFIED TOXIC MOULD SHALL BE DONE BY LOCAL HEALTH AUTHORITIES AND PROFESSIONAL EXPERTS SKILLED IN HANDLING OF TOXIC SUBSTANCES.

MASONRY (04200)

UNLESS OTHERWISE SPECIFIED ELSEWHERE CONCRETE BLOCK SHALL BE AUTOCURED OR BUBBLE CURE PROCESS, HIGH PRESSURE STEAM CURED, MODULAR FOR BEDDING UNITS USE TYPE "M" MORTAR HAVING COMPRESSIVE STRENGTH OF 2500 PSI MIN. FOR ALL OTHER MASONRY USE TYPE "N" MASONRY MORTAR HAVING A COMPRESSIVE STRENGTH OF 1750 PSI. WHITE MORTAR, UNLESS OTHERWISE INDICATED ON DRAWINGS, USE WHITE SUECA SAND AND WHITE MASONRY CEMENT. MASONRY UNITS SEED BY BUILDING CODES.

1. MASONRY REINFORCEMENT, TIES AND ANCHORS SHALL BE IN ACCORDANCE WITH CONNECTORS FOR MASONRY CMH-3-A730-M84. FOR REINFORCEMENT USE: HARSHALL "LOT" OR "BULK" MESH MANUFACTURED BY BLOCK-LOK LTD. WIRE SHALL BE 9 GAUGE, DEFORMED, HOT DIPPED GALVANIZED AFTER FABRICATION, SIZE 1/8" X 10" 2" NARROWER THAN THE WALL. PROVIDE PREFABRICATED CORNERS AND INTERSECTIONS, CONTINUOUS REINFORCEMENT TO CORNER AND OUT AND COMPLETED ON SCHEDULE. PROVIDE EXTRA REINFORCEMENT AND REINFORCING TIES AT OPENINGS, EXTEND EXTRA REINFORCEMENT 2 FEET BEYOND OPENING IN EACH DIRECTION, WHERE BLOCK AND BLOCK FACING (OR BRICK) JOINTS DO NOT LAP BY 6" MINIMUM. PROVIDE 1/2" (12mm) DRILL OR 1/4" (6mm) DRILL BY BLOCK-LOK LTD. OR TUB-OR-WALL. PROVIDE ADJUSTABLE WALL TIE RECTANGULAR TIE, BUR-D-U-R 3/16" DEFORMED WIRE, GALVANIZED AFTER FABRICATION, SIZE 1/8" 2" NARROWER THAN WALL.
2. PROVIDE WEEP HOLES AT EVERY SECOND BLOCK or FOURTH BLOCK FACING, MINIMUM 2 PER SECTION. PROVIDE 1/4" (6mm) DRILL BY BLOCK-LOK LTD. OR TUB-OR-WALL. PROVIDE ADJUSTABLE WALL TIE RECTANGULAR TIE, BUR-D-U-R 3/16" DEFORMED WIRE, GALVANIZED AFTER FABRICATION, SIZE 1/8" 2" NARROWER THAN WALL.

3. PROVIDE MASONRY REINFORCEMENT, TIES AND ANCHORS SHALL BE IN ACCORDANCE WITH CONNECTORS FOR MASONRY CMH-3-A730-M84. FOR REINFORCEMENT USE: HARSHALL "LOT" OR "BULK" MESH MANUFACTURED BY BLOCK-LOK LTD. WIRE SHALL BE 9 GAUGE, DEFORMED, HOT DIPPED GALVANIZED AFTER FABRICATION, SIZE 1/8" X 10" 2" NARROWER THAN THE WALL. PROVIDE PREFABRICATED CORNERS AND INTERSECTIONS, CONTINUOUS REINFORCEMENT TO CORNER AND OUT AND COMPLETED ON SCHEDULE. PROVIDE EXTRA REINFORCEMENT AND REINFORCING TIES AT OPENINGS, EXTEND EXTRA REINFORCEMENT 2 FEET BEYOND OPENING IN EACH DIRECTION, WHERE BLOCK AND BLOCK FACING (OR BRICK) JOINTS DO NOT LAP BY 6" MINIMUM. PROVIDE 1/2" (12mm) DRILL OR 1/4" (6mm) DRILL BY BLOCK-LOK LTD. OR TUB-OR-WALL. PROVIDE ADJUSTABLE WALL TIE RECTANGULAR TIE, BUR-D-U-R 3/16" DEFORMED WIRE, GALVANIZED AFTER FABRICATION, SIZE 1/8" 2" NARROWER THAN WALL.
4. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
5. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

6. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
7. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

8. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
9. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

10. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
11. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

12. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
13. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

14. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
15. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

16. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
17. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

DEBRIS.

- REMOVE AND REPLACE ANY BUILDING COMPONENTS/MATERIALS SUSCEPTIBLE TO OR SHOWING SIGNS OF MOULD GROWTH (i.e. REPLACE WEET OR CONTAMINATED MATERIALS WITH DRYWALL, INSULATION, CEILING TILES, PLASTER, WOOD, ETC) REMOVAL OF IDENTIFIED TOXIC MOULD SHALL BE DONE BY LOCAL HEALTH AUTHORITIES AND PROFESSIONAL EXPERTS SKILLED IN HANDLING OF TOXIC SUBSTANCES.

MASONRY (04200)

UNLESS OTHERWISE SPECIFIED ELSEWHERE CONCRETE BLOCK SHALL BE AUTOCURED OR BUBBLE CURE PROCESS, HIGH PRESSURE STEAM CURED, MODULAR FOR BEDDING UNITS USE TYPE "M" MORTAR HAVING COMPRESSIVE STRENGTH OF 2500 PSI MIN. FOR ALL OTHER MASONRY USE TYPE "N" MASONRY MORTAR HAVING A COMPRESSIVE STRENGTH OF 1750 PSI. WHITE MORTAR, UNLESS OTHERWISE INDICATED ON DRAWINGS, USE WHITE SUECA SAND AND WHITE MASONRY CEMENT. MASONRY UNITS SEED BY BUILDING CODES.

1. MASONRY REINFORCEMENT, TIES AND ANCHORS SHALL BE IN ACCORDANCE WITH CONNECTORS FOR MASONRY CMH-3-A730-M84. FOR REINFORCEMENT USE: HARSHALL "LOT" OR "BULK" MESH MANUFACTURED BY BLOCK-LOK LTD. WIRE SHALL BE 9 GAUGE, DEFORMED, HOT DIPPED GALVANIZED AFTER FABRICATION, SIZE 1/8" X 10" 2" NARROWER THAN THE WALL. PROVIDE PREFABRICATED CORNERS AND INTERSECTIONS, CONTINUOUS REINFORCEMENT TO CORNER AND OUT AND COMPLETED ON SCHEDULE. PROVIDE EXTRA REINFORCEMENT AND REINFORCING TIES AT OPENINGS, EXTEND EXTRA REINFORCEMENT 2 FEET BEYOND OPENING IN EACH DIRECTION, WHERE BLOCK AND BLOCK FACING (OR BRICK) JOINTS DO NOT LAP BY 6" MINIMUM. PROVIDE 1/2" (12mm) DRILL OR 1/4" (6mm) DRILL BY BLOCK-LOK LTD. OR TUB-OR-WALL. PROVIDE ADJUSTABLE WALL TIE RECTANGULAR TIE, BUR-D-U-R 3/16" DEFORMED WIRE, GALVANIZED AFTER FABRICATION, SIZE 1/8" 2" NARROWER THAN WALL.
2. PROVIDE WEEP HOLES AT EVERY SECOND BLOCK or FOURTH BLOCK FACING, MINIMUM 2 PER SECTION. PROVIDE 1/4" (6mm) DRILL BY BLOCK-LOK LTD. OR TUB-OR-WALL. PROVIDE ADJUSTABLE WALL TIE RECTANGULAR TIE, BUR-D-U-R 3/16" DEFORMED WIRE, GALVANIZED AFTER FABRICATION, SIZE 1/8" 2" NARROWER THAN WALL.

3. PROVIDE MASONRY REINFORCEMENT, TIES AND ANCHORS SHALL BE IN ACCORDANCE WITH CONNECTORS FOR MASONRY CMH-3-A730-M84. FOR REINFORCEMENT USE: HARSHALL "LOT" OR "BULK" MESH MANUFACTURED BY BLOCK-LOK LTD. WIRE SHALL BE 9 GAUGE, DEFORMED, HOT DIPPED GALVANIZED AFTER FABRICATION, SIZE 1/8" X 10" 2" NARROWER THAN THE WALL. PROVIDE PREFABRICATED CORNERS AND INTERSECTIONS, CONTINUOUS REINFORCEMENT TO CORNER AND OUT AND COMPLETED ON SCHEDULE. PROVIDE EXTRA REINFORCEMENT AND REINFORCING TIES AT OPENINGS, EXTEND EXTRA REINFORCEMENT 2 FEET BEYOND OPENING IN EACH DIRECTION, WHERE BLOCK AND BLOCK FACING (OR BRICK) JOINTS DO NOT LAP BY 6" MINIMUM. PROVIDE 1/2" (12mm) DRILL OR 1/4" (6mm) DRILL BY BLOCK-LOK LTD. OR TUB-OR-WALL. PROVIDE ADJUSTABLE WALL TIE RECTANGULAR TIE, BUR-D-U-R 3/16" DEFORMED WIRE, GALVANIZED AFTER FABRICATION, SIZE 1/8" 2" NARROWER THAN WALL.
4. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
5. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

6. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
7. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

8. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
9. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

10. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
11. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

12. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
13. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

14. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
15. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

16. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
17. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

DEBRIS.

- REMOVE AND REPLACE ANY BUILDING COMPONENTS/MATERIALS SUSCEPTIBLE TO OR SHOWING SIGNS OF MOULD GROWTH (i.e. REPLACE WEET OR CONTAMINATED MATERIALS WITH DRYWALL, INSULATION, CEILING TILES, PLASTER, WOOD, ETC) REMOVAL OF IDENTIFIED TOXIC MOULD SHALL BE DONE BY LOCAL HEALTH AUTHORITIES AND PROFESSIONAL EXPERTS SKILLED IN HANDLING OF TOXIC SUBSTANCES.

MASONRY (04200)

UNLESS OTHERWISE SPECIFIED ELSEWHERE CONCRETE BLOCK SHALL BE AUTOCURED OR BUBBLE CURE PROCESS, HIGH PRESSURE STEAM CURED, MODULAR FOR BEDDING UNITS USE TYPE "M" MORTAR HAVING COMPRESSIVE STRENGTH OF 2500 PSI MIN. FOR ALL OTHER MASONRY USE TYPE "N" MASONRY MORTAR HAVING A COMPRESSIVE STRENGTH OF 1750 PSI. WHITE MORTAR, UNLESS OTHERWISE INDICATED ON DRAWINGS, USE WHITE SUECA SAND AND WHITE MASONRY CEMENT. MASONRY UNITS SEED BY BUILDING CODES.

1. MASONRY REINFORCEMENT, TIES AND ANCHORS SHALL BE IN ACCORDANCE WITH CONNECTORS FOR MASONRY CMH-3-A730-M84. FOR REINFORCEMENT USE: HARSHALL "LOT" OR "BULK" MESH MANUFACTURED BY BLOCK-LOK LTD. WIRE SHALL BE 9 GAUGE, DEFORMED, HOT DIPPED GALVANIZED AFTER FABRICATION, SIZE 1/8" X 10" 2" NARROWER THAN THE WALL. PROVIDE PREFABRICATED CORNERS AND INTERSECTIONS, CONTINUOUS REINFORCEMENT TO CORNER AND OUT AND COMPLETED ON SCHEDULE. PROVIDE EXTRA REINFORCEMENT AND REINFORCING TIES AT OPENINGS, EXTEND EXTRA REINFORCEMENT 2 FEET BEYOND OPENING IN EACH DIRECTION, WHERE BLOCK AND BLOCK FACING (OR BRICK) JOINTS DO NOT LAP BY 6" MINIMUM. PROVIDE 1/2" (12mm) DRILL OR 1/4" (6mm) DRILL BY BLOCK-LOK LTD. OR TUB-OR-WALL. PROVIDE ADJUSTABLE WALL TIE RECTANGULAR TIE, BUR-D-U-R 3/16" DEFORMED WIRE, GALVANIZED AFTER FABRICATION, SIZE 1/8" 2" NARROWER THAN WALL.
2. PROVIDE WEEP HOLES AT EVERY SECOND BLOCK or FOURTH BLOCK FACING, MINIMUM 2 PER SECTION. PROVIDE 1/4" (6mm) DRILL BY BLOCK-LOK LTD. OR TUB-OR-WALL. PROVIDE ADJUSTABLE WALL TIE RECTANGULAR TIE, BUR-D-U-R 3/16" DEFORMED WIRE, GALVANIZED AFTER FABRICATION, SIZE 1/8" 2" NARROWER THAN WALL.

3. PROVIDE MASONRY REINFORCEMENT, TIES AND ANCHORS SHALL BE IN ACCORDANCE WITH CONNECTORS FOR MASONRY CMH-3-A730-M84. FOR REINFORCEMENT USE: HARSHALL "LOT" OR "BULK" MESH MANUFACTURED BY BLOCK-LOK LTD. WIRE SHALL BE 9 GAUGE, DEFORMED, HOT DIPPED GALVANIZED AFTER FABRICATION, SIZE 1/8" X 10" 2" NARROWER THAN THE WALL. PROVIDE PREFABRICATED CORNERS AND INTERSECTIONS, CONTINUOUS REINFORCEMENT TO CORNER AND OUT AND COMPLETED ON SCHEDULE. PROVIDE EXTRA REINFORCEMENT AND REINFORCING TIES AT OPENINGS, EXTEND EXTRA REINFORCEMENT 2 FEET BEYOND OPENING IN EACH DIRECTION, WHERE BLOCK AND BLOCK FACING (OR BRICK) JOINTS DO NOT LAP BY 6" MINIMUM. PROVIDE 1/2" (12mm) DRILL OR 1/4" (6mm) DRILL BY BLOCK-LOK LTD. OR TUB-OR-WALL. PROVIDE ADJUSTABLE WALL TIE RECTANGULAR TIE, BUR-D-U-R 3/16" DEFORMED WIRE, GALVANIZED AFTER FABRICATION, SIZE 1/8" 2" NARROWER THAN WALL.
4. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
5. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

6. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
7. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE, EXTRUDED POLYURETHANE FOAM SUCH AS "SOF RUD" BY TREMCO OR EQUAL.

8. PROVIDE LATERAL SUPPORT AT TOP OF BACKUP WALLS. 4" X 4" X 1/4" STEEL ANGLES LONG EACH SIDE OF WALL, WELDED TO STRUCTURAL STEEL, 2" (51mm) C/C MAXIMUM, STAGGERED, UNLESS NOTED OTHERWISE. PROVIDE LATERAL SUPPORTS AS PER CODE REQUIREMENTS.
9. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS 30 FEET C/C MAXIMUM IN CONTINUOUS WALLS HAVING NO SHEDDING INTERSECTIONS. PROVIDE VERTICAL THROUGHWALL CONTROL JOINTS AT POINTS OF HIGH STRESS CONCENTRATION AND AT POINTS OF WEAKNESS SUCH AS CORNERS, CHANGES IN WALL THICKNESS, CHANGES SUCH AT CHASES AND AT PILLASTERS AND MAXIMUM OF 12 FEET FROM CORNERS. PROVIDE JOINT FILLER: CONTINUOUSLY POLYURETHANE DUST FREE, ROUNDED, FLEXIBLE

1. DO NOT INTERFERE WITH, ENCUMBER, ENDANGER OR CREATE NUISANCE FROM ANY CAUSE DUE TO DEMOLITION WORK, TO ANY PERSONS, PROPERTY, OR STRUCTURES, OR ADJACENT TENANT AREAS, WHETHER OCCUPIED OR UNOCCUPIED DURING THIS WORK. MAKE GOOD ANY DAMAGE TO SUCH PREMISES RESULTING FROM THIS WORK AT NO EXTRA COST TO THE OWNER.
2. TEMPORARY PROTECTION: UNLESS OTHERWISE SPECIFIED, PROVIDE AND MAINTAIN ALL NECESSARY PROTECTION INCLUDING HOARDING, SHORING, BRACINGS, BARRICADES, WARNING LIGHTS AND SIGNS, BEFORE AND DURING DEMOLITION WORK.
3. MAINTAIN PROPER ACCESS TO SITE. PROVIDE ADEQUATE PROTECTION TO CURBS, SIDEWALKS AND THE LIKE, MAKING GOOD ANY DAMAGE AT NO COST TO THE OWNER.
4. DO NOT INTERFERE WITH, ENCUMBER, ENDANGER OR CREATE NUISANCE FROM ANY CAUSE DUE TO DEMOLITION WORK, TO ANY PERSONS, PROPERTY, OR STRUCTURES, OR ADJACENT STRUCTURES IN POSSESSION OF OWNER OR OTHERS, WHICH ARE TO REMAIN, AND MAKE GOOD ANY DAMAGE TO SUCH STRUCTURES RESULTING FROM THIS WORK AT NO EXTRA COST TO THE OWNER.

TAKE NECESSARY PRECAUTIONS TO GUARD AGAINST MOVEMENT, SETTLEMENT OR COLLAPSE OF EXISTING ADJACENT UTILITY SERVICES, PUBLIC PROPERTY AND/OR STRUCTURES, WHETHER TO REMAIN OR NOT. IF THIS OR ANY OTHER UTILITY SERVICE IS TO BE DISCLOSED, TAKE IMMEDIATE EMERGENCY MEASURES, REPORT TO CONSULTANT, CONFIRM WRITING, AND WAIT INSTRUCTIONS BEFORE PROCEEDING WITH ANY FURTHER RELATED DEMOLITION WORK.

ADVISE PROPER AUTHORITIES BEFORE DISCONNECTING ANY EXISTING UTILITY SERVICES. THESE SHALL BE DISCONNECTED AND/OR CAPPED OFF IN ACCORDANCE WITH UTILITY INSTRUCTIONS AND ESTABLISHED PROCEDURES BY TRADESMAN. THE WORK OF THE CONTRACTOR SHALL BE IN ACCORDANCE WITH THE ELECTRICAL CODE. ALL ELECTRICAL ITEMS SHALL BE DISCONNECTED BY ELECTRICAL CONTRACTOR. MECHANICAL ITEMS SHALL BE DISCONNECTED BY MECHANICAL CONTRACTOR.

UNLESS OTHERWISE INDICATED ON DRAWINGS, REMOVE ALL ABANDONED SYSTEMS, EQUIPMENT, CONDUITS, WIRING,

DEMOLITION WORK SHALL INCLUDE BUT NOT LIMITED TO: COMPLETE REMOVAL OF PART OF THE BUILDING INCLUDING STRUCTURE, REMOVAL OF WALLS, PARTITIONS AND CEILINGS TO SUIT WORK: PLUMBING FIXTURES, MECHANICAL AND ELECTRICAL SYSTEMS AS INDICATED ON DRAWINGS AND IS REQUIRED TO SUIT THE SCOPE OF THIS WORK.

WORK WHICH MIGHT BE DISRUPTIVE TO THE BUSINESS OF TENANTS, SUCH AS NOISY WORK, MUST BE CARRIED OUT DURING THE OFF HOURS WHEN THE BUILDING IS CLOSED FOR BUSINESS.

5. CONSTRUCTION AND DEMOLITION WORK ADJACENT TO TENA AREAS MUST BE CARRIED OUT WITHIN NEATLY HOARDED AREAS TO MAINTAIN PUBLIC SAFETY AND TO KEEP NOISE

IMPORTANT DEMOLITION NOT
GENERAL CONTRACTOR TO CONTACT CITY OF WINDSOR FIRE
MARSHAL PRIOR TO COMMENCEMENT OF WORK TO COORDINATE
ALL FIRE SYSTEM SHUT DOWNS.

 DENOTES EXISTING WALLS TO REMAIN
 DENOTES EXISTING CONDITIONS TO REMAIN UNLESS NOTED OTHERWISE
 DENOTES WALLS, DOORS, SIDEWALK PORTION TO BE DEMOLISHED

WHEN PUBLIC ACCESS IS MAINTAINED THROUGH OR BELOW A CONSTRUCTION AREA, THE HIGHEST STANDARDS OF PUBLIC SAFETY MUST BE MAINTAINED. THE OVERHEAD PROTECTION, THE HOARDING AND ANY TEMPORARY DUST PROOF ENCLOSURES MUST BE OF PROFESSIONAL QUALITY AND BE CONSTRUCTED OF NEW MATERIALS AND SHALL BE CONSTRUCTED AS FOLLOWS:

STEEL STUD FRAMING WITH POLYETHYLENE AND DRYWALL OR GOOD ONE SIDE PLYWOOD (GOOD SIDE EXPOSED TO PUBLIC AREA) ON EXISTING BUILDING SIDE OF STUD FRAMING. FRAMING TO FORM DUST PROOF INSTALLATION. APPLY TWO COATS OF PAINT, IN APPROVED COLOURS TO THE TEMPORARY STRUCTURES.


CONSTRUCTION AND DEMOLITION WORK ADJACENT TO TENANT AREAS MUST BE CARRIED OUT WITHIN NEATLY HOARDED AREAS TO MAINTAIN PUBLIC SAFETY AND KEEP NOISE AND DUST AWAY FROM THE PUBLIC AND FROM TENANT PREMISES.

REMOVAL AND DISPOSAL SHALL COMPLY WITH THE
 PROVINCE OF ONTARIO'S ENVIRONMENTAL PROTECTION ACT:
 TARIO REGULATION 102/94: WASTE AUDITS AND WASTE
 REDUCTION WORK PLAN.
 TARIO REGULATION 103/94: INDUSTRIAL, COMMERCIAL AND
 INSTITUTIONAL SOURCE SEPARATION PROGRAMS.
 BIDDING CONTRACTORS SHALL SATISFY THEMSELVES WITH
 THE REQUIREMENTS OF THE ABOVE NOTED CONDITIONS
 TO CODES AND INCLUDE IN THEIR TENDER PRICE PRIOR TO
 ORDER CLOSING.

AZ	ISSUED FOR CONSTRUCTION	18 MAR 2019
AZ	ISSUED FOR ADDENDUM NO. 2	21 FEB 2019
AZ	ISSUED FOR TENDER	11 FEB 2019
AZ	ISSUED FOR PERMIT	01 FEB 2019
EV	BY DESCRIPTION	DATE

CONTRACTOR SHALL CHECK AND VERIFY
ALL DIMENSIONS ON SITE
DO NOT SCALE DRAWINGS

RIO CAN
MANAGEMENT INC.
RIOCAN YONGE EGLINTON CENTRE, 500-2300 YONGE STREET
P.O. Box 2388, TORONTO, ON, M4P 1E4

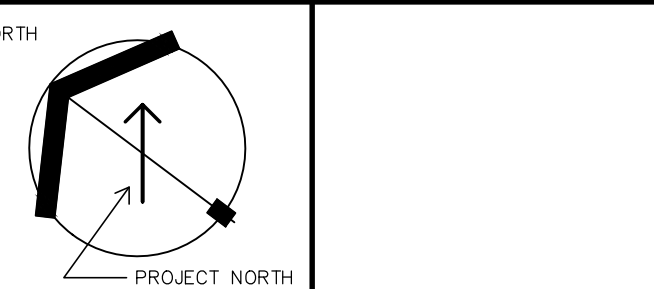

PROJECT PROPOSED REDEMISE AT
RIOCAN CENTRE WINDSOR
BUILDING G1 (FORMER SEARS)
3051 LEGACY PARK DRIVE WINDSOR, ON
DRAWING 005

DRAWN BY	AK	COMM. NO.	19-33
CHECKED	AZ	DRAWING NO.	D 1
SCALE	AS NOTED		
DATE	JANUARY 2019		

TAPER SIZE 30X42



CONTRACTOR SHALL CHECK AND VERIFY
ALL DIMENSIONS ON SITE
DO NOT SCALE DRAWINGS

RIO CAN
MANAGEMENT INC.
RIOCAN YONGE EGLINTON CENTRE, 500-2300 YONGE STREET
P.O. Box 2386, TORONTO, ON, M4P 1E4



PROJECT

PROPOSED REDEMISE AT
RIOCAN CENTRE WINDSOR
BUILDING G1 (FORMER SEARS)
3051 LEGACY PARK DRIVE WINDSOR, ON

EXISTING EXTERIOR
ELEVATIONS - DEMO

DRAWN BY	FC	COMM. NO.	19-33
CHECKED	AZ	DRAWING NO.	D2
SCALE			
DATE	JANUARY 2019		

EN2 EXISTING WALL

- EXISTING WALL CONSTRUCTION & RATING TO REMAIN; PATCH CRACKS, REPAIR HOLES – SEE VERIFY.
- **△** PATCH & SEAL EXISTING GYPSUM BOARD TOP 10" OF "O" WALL

EN2 EXISTING WALL W/ NEW FINISH

- EXISTING WALL CONSTRUCTION & RATING TO REMAIN
- **△** PATCH & REMOVE ALL INTERIOR TENANT FINISHES & FIXTURES
- PATCH, REPAIR & MAKE GOOD ALL DAMAGED AREAS

EN3 EXISTING WALL W/ NEW FINISH

- EXISTING WALL CONSTRUCTION & RATING TO REMAIN
- **△** PATCH & REMOVE ALL INTERIOR TENANT FINISHES & FIXTURES
- PATCH, REPAIR & MAKE GOOD ALL DAMAGED AREAS
- **△** PATCH & SEAL EXISTING GYPSUM BOARD TOP 10" OF "O" WALL
- LAMINATE 3/8" GYPSUM BOARD TO EXISTING – FULL HEIGHT, TAPED & SANDED
- FIRE SEAL TOP & BOTTOM

W1 INTERIOR WALL – REFER TO PLAN AND DETAIL

1. 1HR RATE DEMISING WALL, UIC, W415 (SM/LAR)

- 3/8" FIRE RATED GYPSUM BOARD ON BOTH SIDES, TAPE, SANDED – FULL HEIGHT ON
- 6" METAL STUD 20 GA MIN. @ 16" O.C. C/W BATT INSULATION (8" MIN.) TO FULL HEIGHT ON
- **△** MAKE CONNECTION TO U/S OF DECK OR JOIST FOR ROOF DEFLECTION
- FIRE SEAL TOP, BOTTOM AND ALL PENETRATIONS WITH HLT1 FS001 OR EQUIV. HLT1 – UIC SYSTEM NO HWFS AND PENETRATIONS UIC SYSTEM NO SP229 + F AND RH RATINGS) TO SATISFACTION OF AUTHORITY
- HANG JOIST BRACKET
- CUT GYPSUM BOARD TO SUIT ROOF DECK FLUTES

W2 EXTERIOR WALL – REFER TO PLAN AND SECTION

SLAB TO TOP OF MASONRY

- 3" X ARCHITECTURAL BLOCK SPILT FACE FACING
- 1" X AIR SPACE ON
- 1"XVX AIR BARRIER SEALED & MECHANICALLY FASTENED TO EACH STUD C/W 2" PLASTIC WASHERS
- 2" DENSGLASS GLO SHEATHING ON
- 8" METAL STUD @ 16" O.C. W/ BATT INSULATION (8" MIN.) TO FULL HEIGHT ON
- 6 MIL. POLY VAPOUR BARRIER ON
- 3/8" GYPSUM BOARD FULL HEIGHT, TAPE, SANDED & SEALED SMOOTH READY FOR TENANT FINISHES

TOP OF MASONRY TO U/S OF SOFFIT OR TOP OF PARAPET

– STUCCO FINISH

- 2" X DRYVIT OUTSULATION PD SET IN DRYVIT ADHESIVE IN VERTICALLY NAIL THROUGH CONCRETE
- BACKSTOP APPLIED AIR BARRIER ON
- 2" DENSGLASS GLO SHEATHING ON
- 8" METAL STUD @ 16" O.C. C/W BATT INSULATION (8" MIN.) TO FULL HEIGHT ON
- 6 MIL. POLY VAPOUR BARRIER ON
- 3/8" GYPSUM BOARD FULL HEIGHT, TAPE, SANDED & SEALED SMOOTH READY FOR TENANT FINISHES

1. ALL DRYWALL SHALL BE TAPED AND SANDED, READY TO ACCEPT TENANT FINISH (FULL HEIGHT)
2. PROVIDE SLIDING CONNECTION TO U/S OF BEAMS, DECK OR JOIST FOR ROOF DEFLECTION.
3. FIRE SEAL FLHTI FS001 OR FS-ONE FLEXIBLE FIRE STOP AT ROOF DECK, FLOOR AND WALL PENETRATIONS TO SUIT RATING OF WALL. APPLICATION TO COMPLY WITH MANUFACTURER SPECIFICATION AND TO THE SATISFACTION OF AUTHORITIES HAVING JURISDICTION FOR ALL RATED WALLS.
4. CALLK SEAL AT ROOF DECK, FLOOR AND ALL WALL PENETRATIONS FOR NON-RATED WALLS.
5. CUT DRYWALL TO SUIT ROOF DECK FLUTES AT ALL WALLS, WHERE NOTED.
6. PROVIDE CONTROL JOINTS AS INDICATED IN GENERAL NOTES (SEE SECTION 09050, TYP.)
7. G.C. TO BOX IN ALL SERVICES NOT CONCEALED IN WALLS /W/STEEL STUD FRAMING + 5/8" DRYWALL TAPOD + SANDED TO 15'-0" A.F.F. C/W ACCESS PANELS
8. ALL WALLS TO BE INSTALLED A MIN. OF 1/2" FROM TOP OF CONCRETE SLAB (MAX. 5/8")
9. G.C. TO SCRAPE AND VACUUM CLEAN BOTTOM OF TRUCK PRIOR TO INSTALLATION OF INSULATION
10. PROVIDE 1/2" EXTERIOR GRADE PLYWOOD WITH BLUE SKIN PLEER TO HINGED PANELS (IN SINGLE CONFIGURATION) AS SHEATHING AT ALL SPANDREL PANEL LOCATIONS.
- 11.G.C. TO COORDINATE ELECTRICAL, FLUE FIXATIONS W/ ELECTRICAL, EFS AND STUD/GYPO BOARD SUBCONTRACTORS. ENSURE ADEQUATE BACKING SUPPORT IS PROVIDED.
12. ——— DENOTES STRUCTURAL BRACING (SEE STRUCTURAL DRAWINGS).
13. WHERE DEMOLITION IS CARRIED OUT WITHIN OR ADJACENT TO EXISTING STRUCTURE, PROVIDE PATCH, REPAIR AND MAKE GOOD TO ALL AFFECTED AREAS ——— TYPICAL THROUGHOUT.
14. VERIFY INTERIOR AND EXTERIOR DIMENSIONS, NOTIFY ARCHITECT IMMEDIATELY WITH DISCREPANCIES.

1. BASE BUILDING CONTRACTOR TO PROVIDE (A MINIMUM OF) FOURTEEN (14) DAYS OF NOTICE PRIOR TO INSTALLING THE DRYWALL ON ALL WALLS.
2. BASE BUILDING CONTRACTOR TO PROVIDE (A MINIMUM OF) TWENTY-ONE (21) DAYS NOTICE PRIOR TO INSTALLING IN--SLAB ROUGH--INS.
3. BASE BUILDING CONTRACTOR TO COORDINATE ALL WORK SHOWN ON THESE DRAWINGS WITH TENANT DRAWINGS.
4. BASE BUILDING CONTRACTOR TO REQUEST TENANT DRAWINGS PRIOR TO COMMENCEMENT OF WORK.


HOARDING TYPE 1:

- 8'-0" HIGH CONSTRUCTION FENCE ANCHORED TO SLAB
- WITH INSULATED TARPS SUSPENDED DOWN FROM JOISTS ABOVE


HOARDING TYPE 2:

- 6" STEEL STUDS C/W BATT INSULATION AT 16" O.C. - BRACE AS REQUIRED
- ON EXTERIOR SIDE
- 6 MIL. POLY VAPOUR BARRIER ON,
- EXTERIOR GRADE GYPSUM BOARD
- PROVIDE ACCESS DOOR.







16 NOT USED
SCALE: N.T.S.




15 NOT USED
SCALE: N.T.S.




14 NOT USED
SCALE: N.T.S.

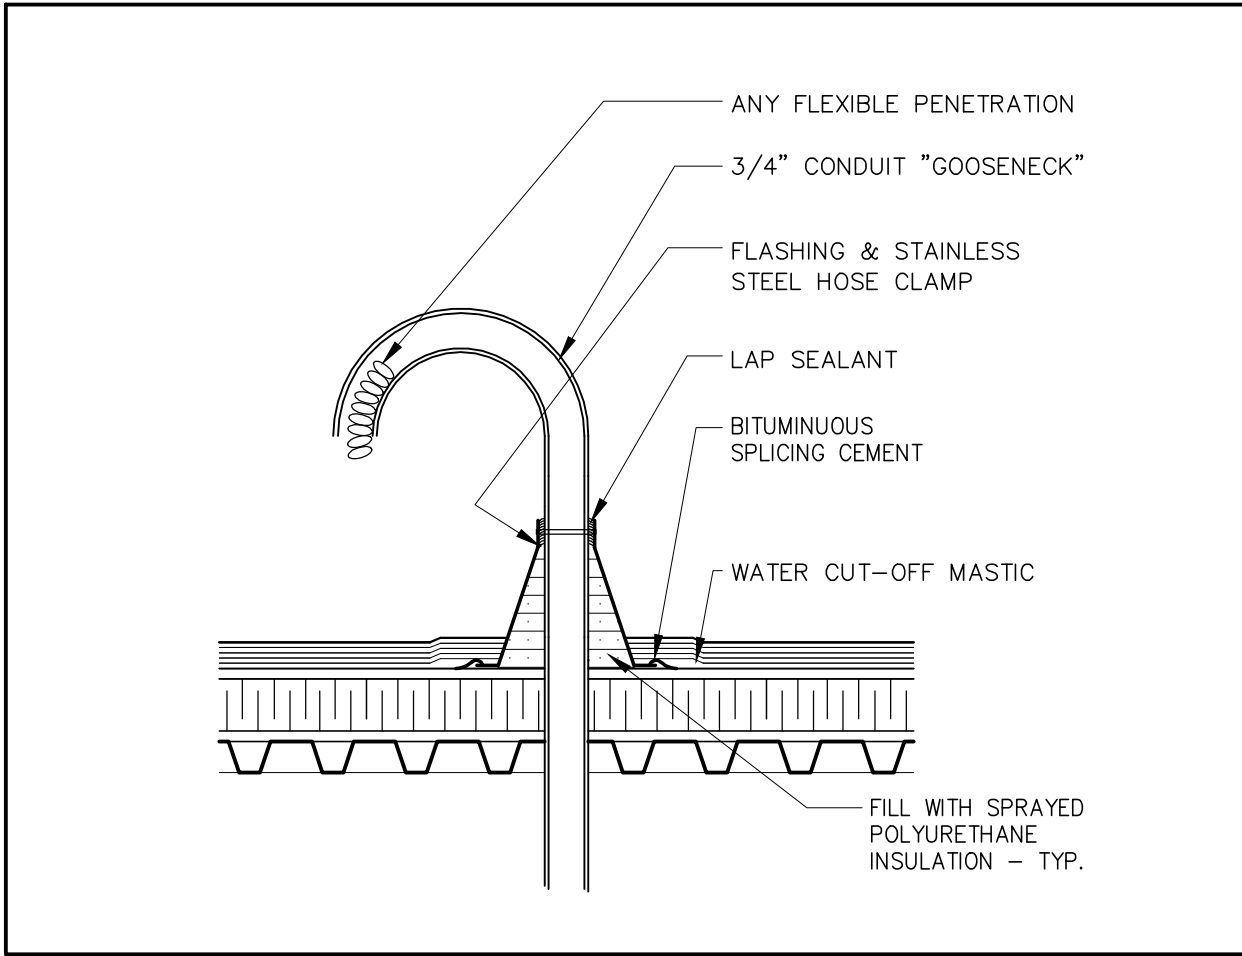


13 FLEXIBLE ROOF PENETRATION
SCALE: N.T.S.




8 NOT USED
SCALE: N.T.S.




12 NOT USED
SCALE: N.T.S.




11 NOT USED
SCALE: N.T.S.

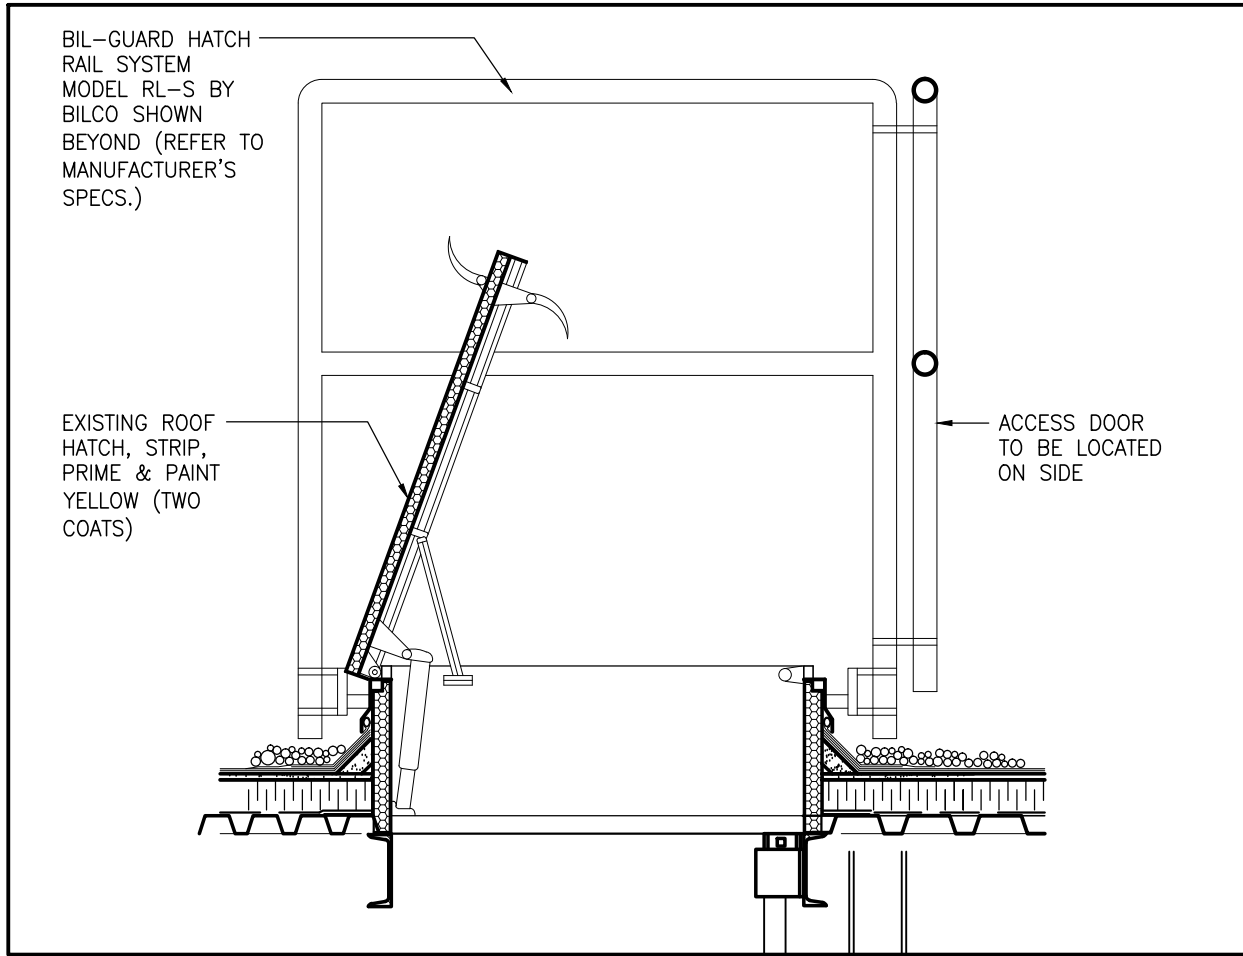


10 ROOF ACCESS GUARD DETAIL
SCALE: 3/4" = 1'-0"

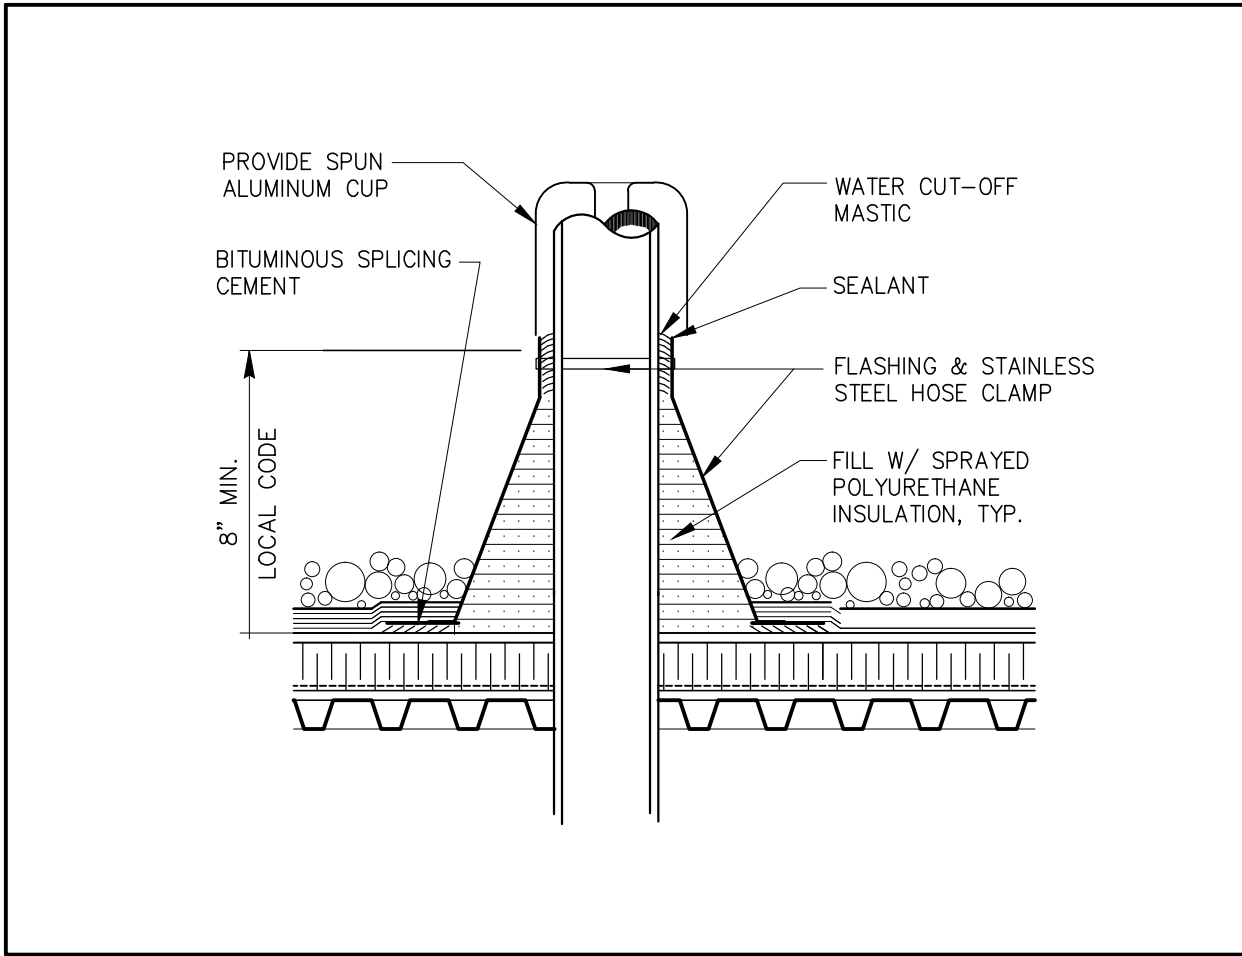


9 PIPE PENETRATION
SCALE: N.T.S.

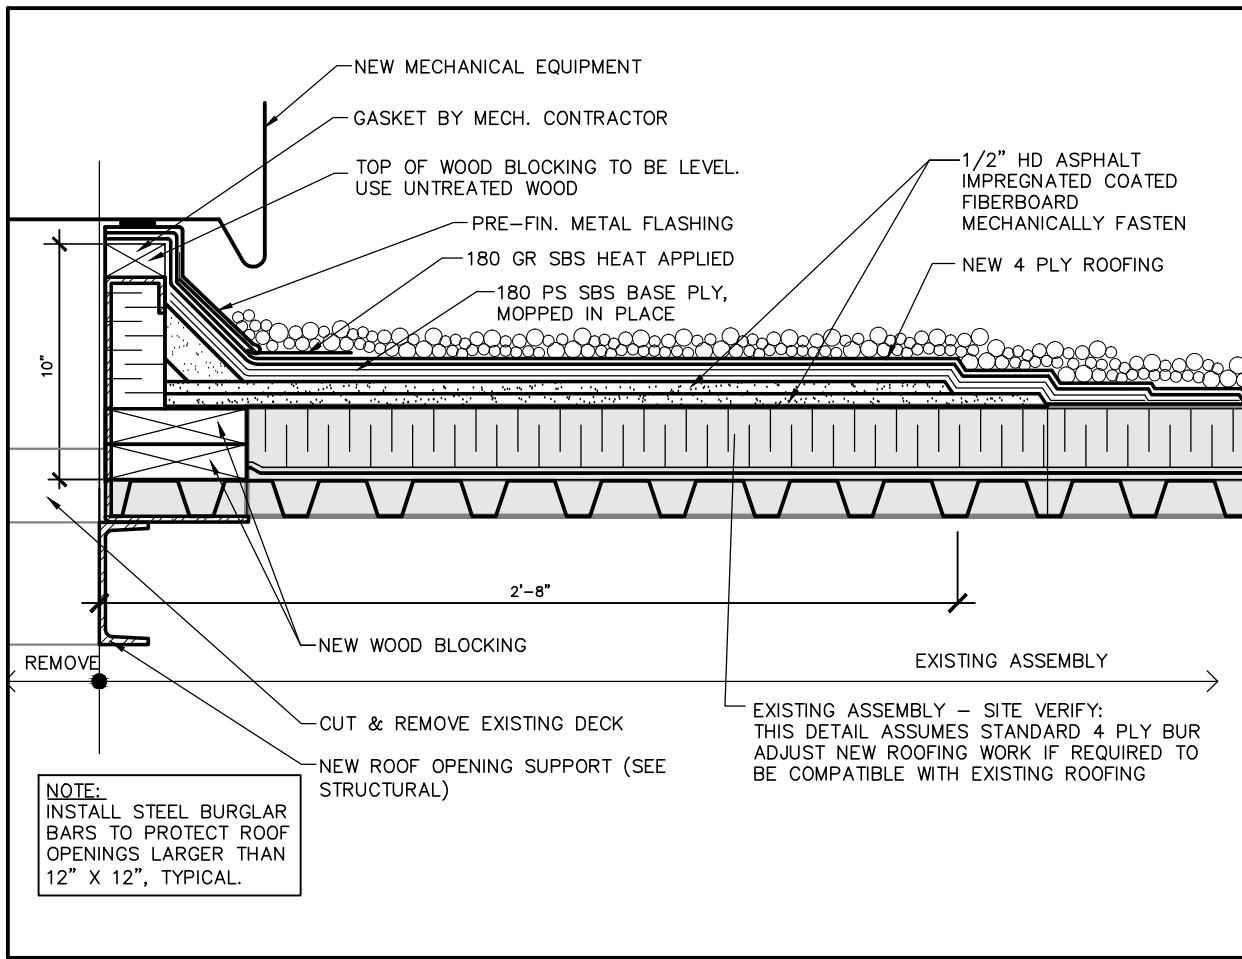


7 ROOF/R.T.U. CURB DETAIL
SCALE: N.T.S.

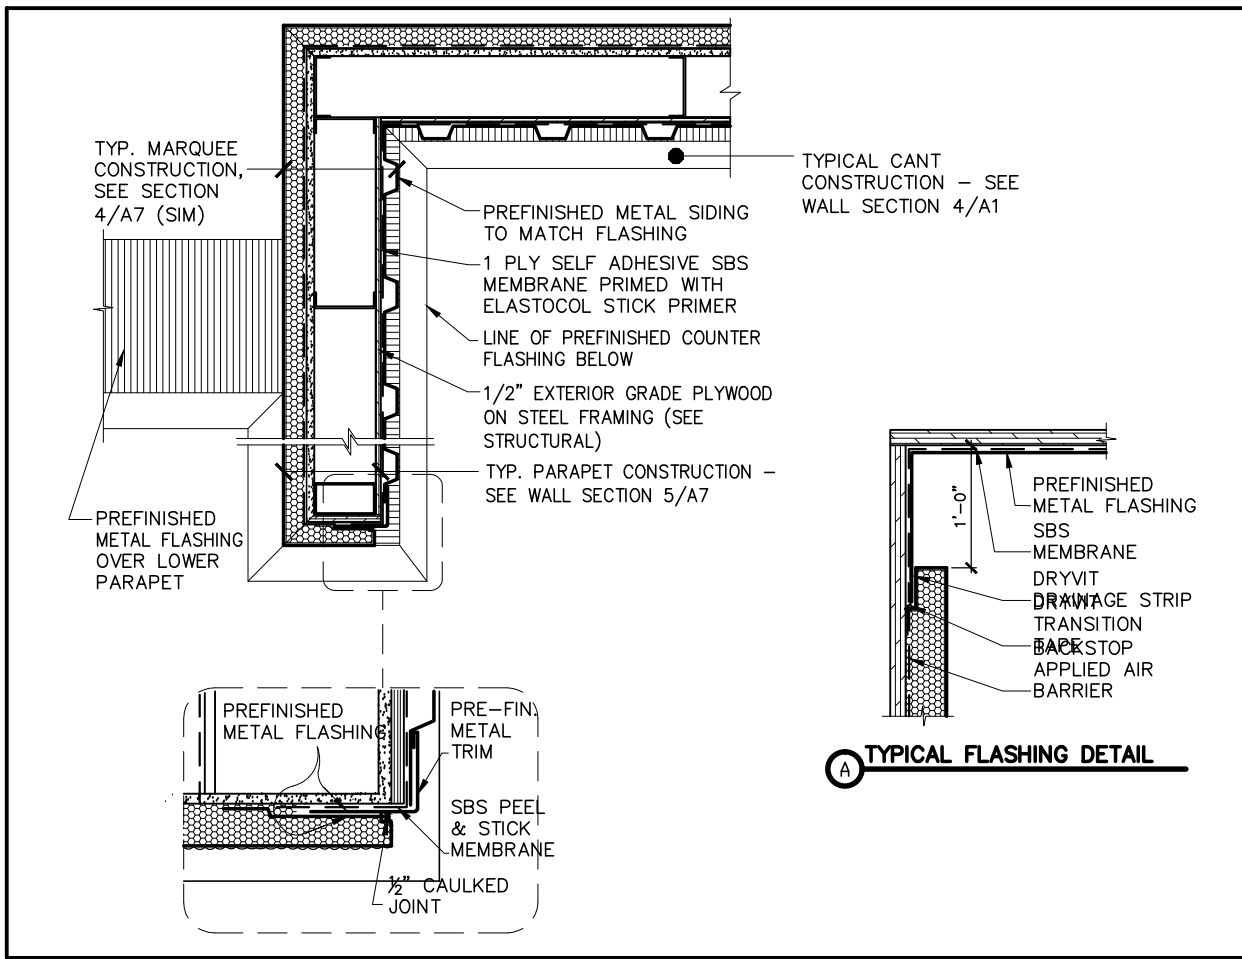


6 MARQUEE PARAPET
SCALE: N.T.S.

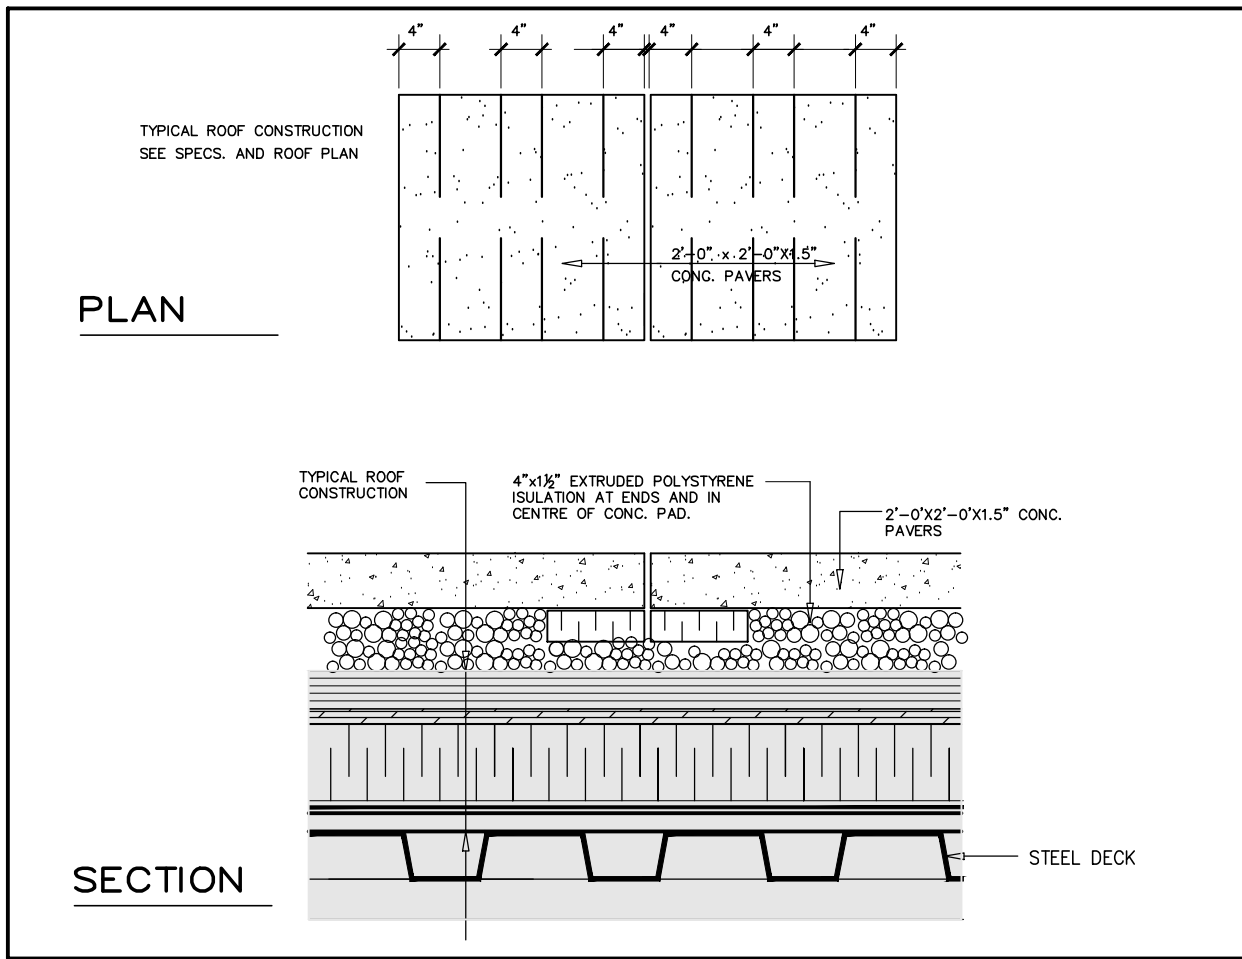


5 PAVER DETAIL
SCALE: N.T.S.




4 NOT USED
SCALE: N.T.S.

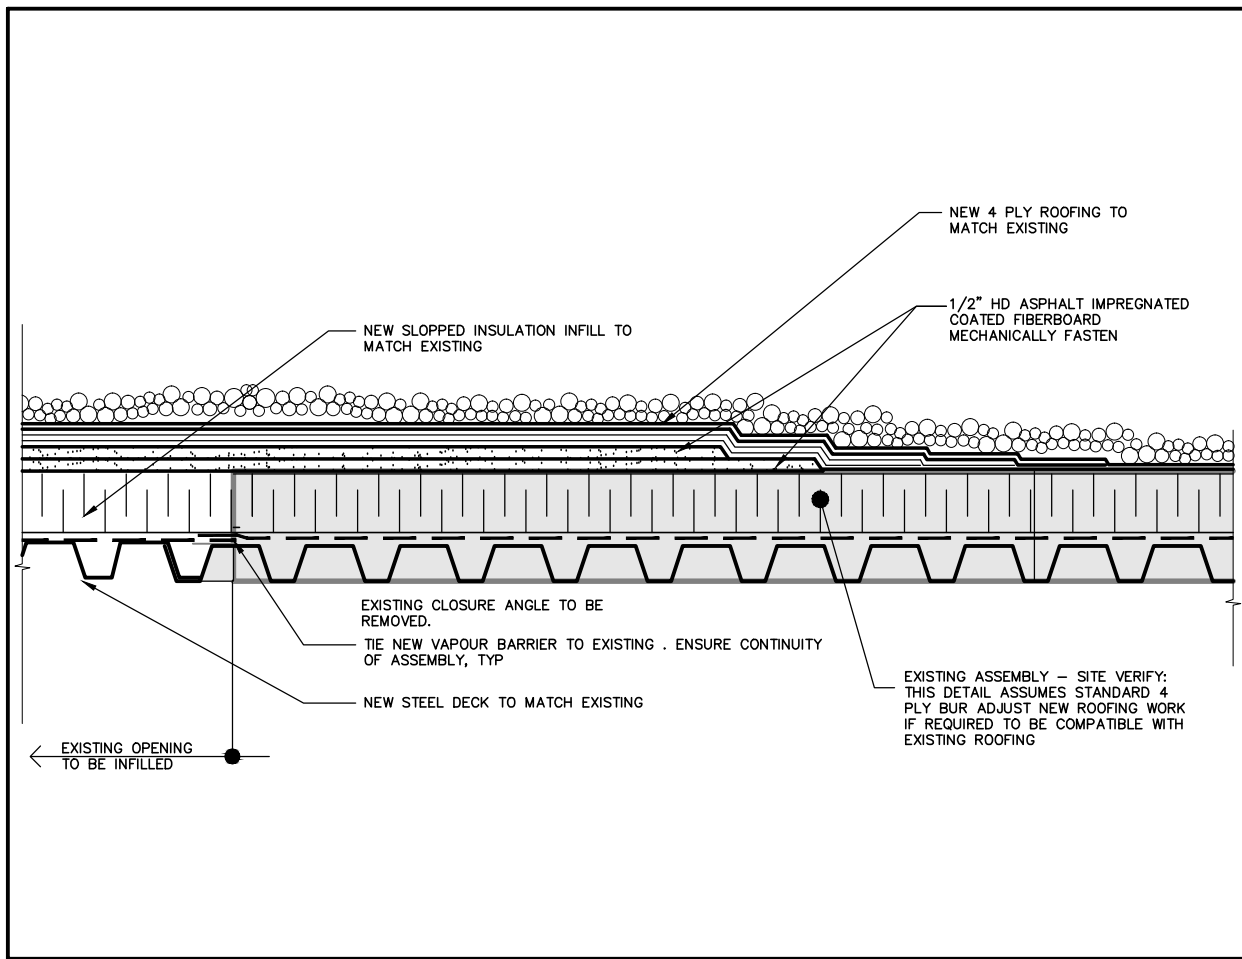

3 ROOFING DETAIL
SCALE: N.T.S.

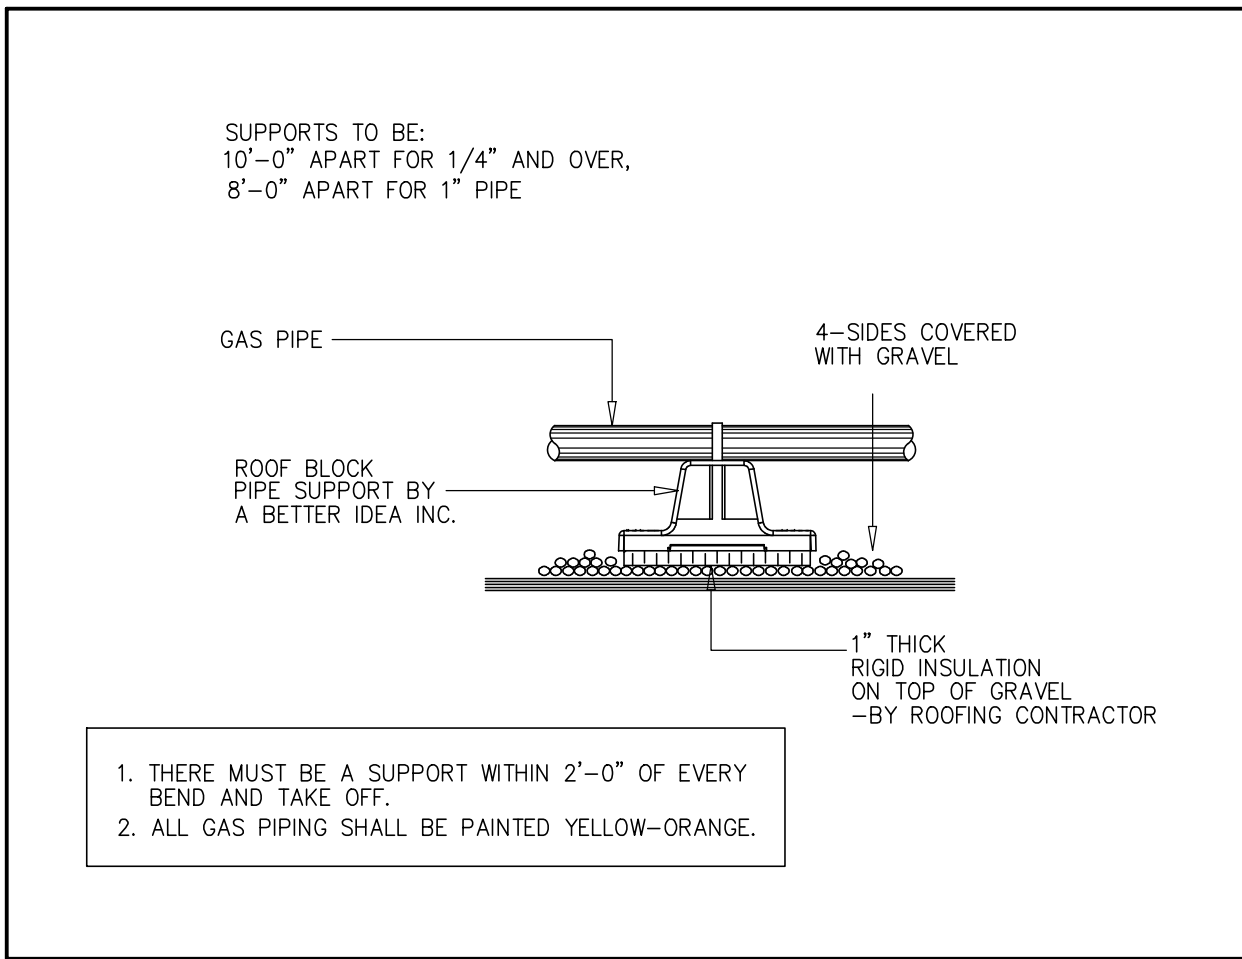

2 GAS LINE SUPPORT DETAIL
SCALE: N.T.S.

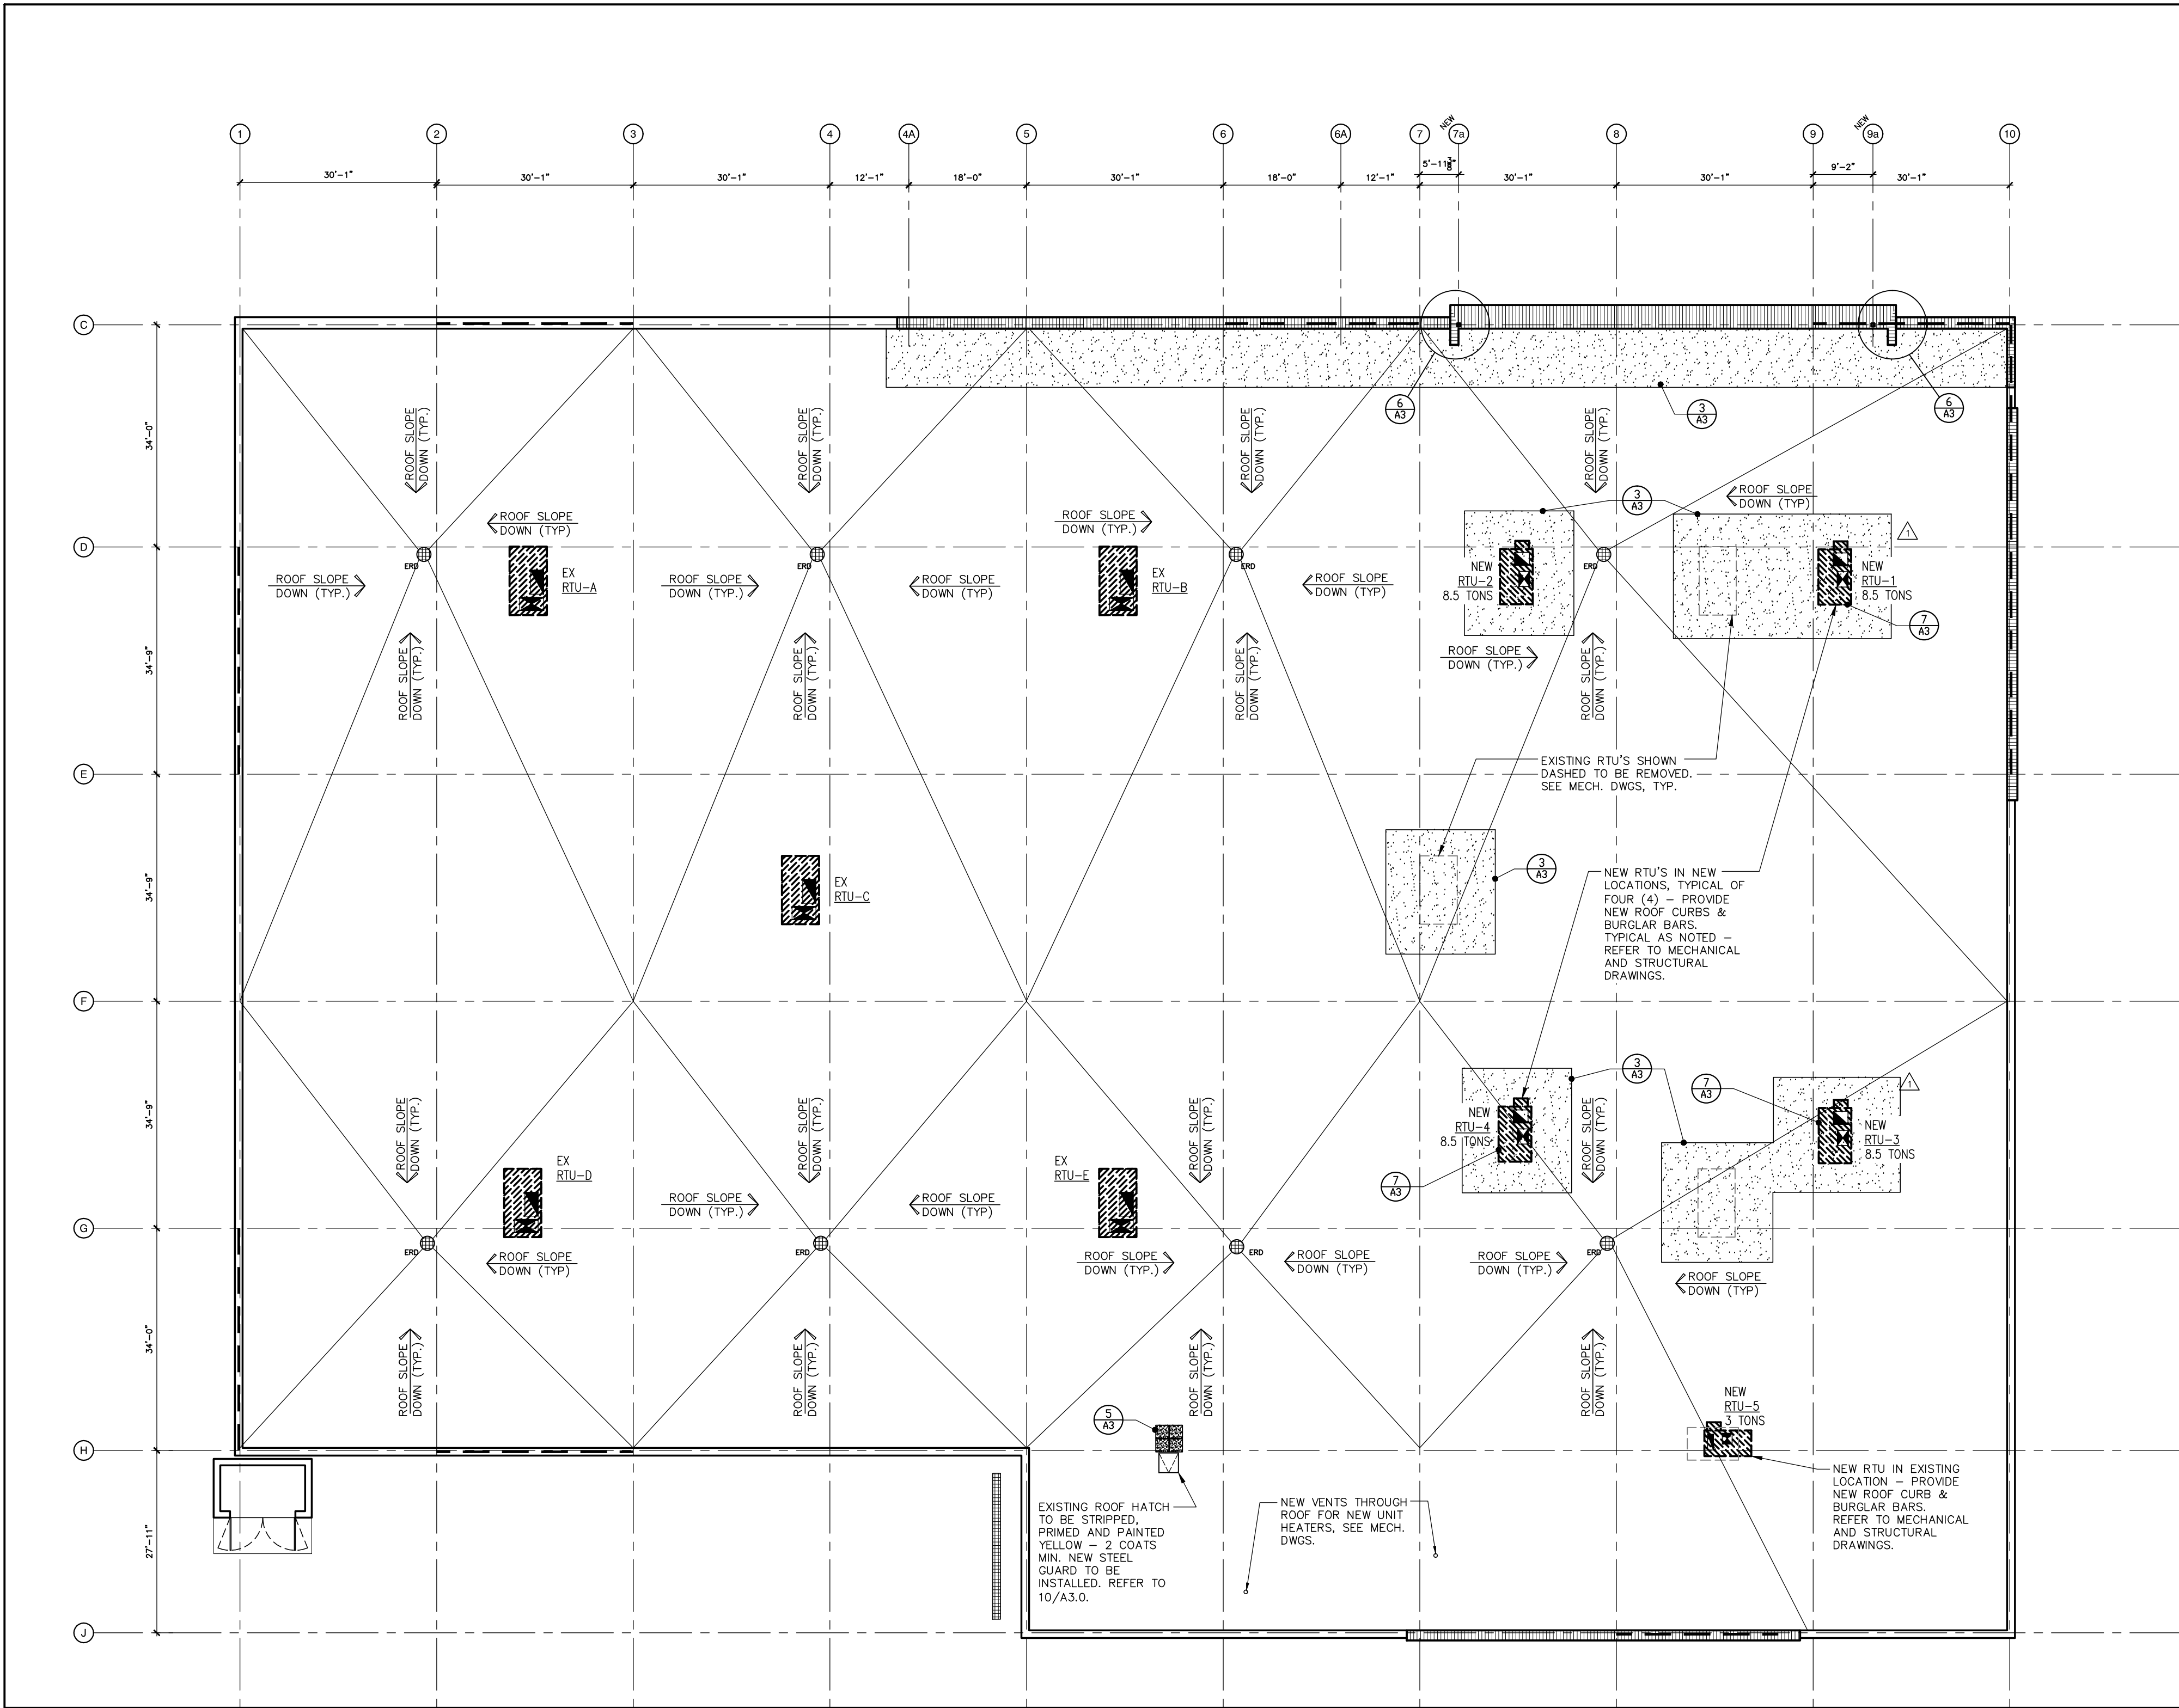


REV	BY	DESCRIPTION	DATE
AZ		ISSUED FOR CONSTRUCTION	18 MAR 2019
AZ		ISSUED FOR ADDENDUM NO. 1	15 FEB 2019
AZ		ISSUED FOR TENDER	11 FEB 2019
AZ		ISSUED FOR PERMIT	01 FEB 2019

CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS ON SITE. DO NOT SCALE DRAWINGS.

RIOCAN
MANAGEMENT INC.
RIOCAN YONGE EGLINTON CENTRE, 500-2300 YONGE STREET
P.O. Box 2386, TORONTO, ON, M4P 1E4

LEON LUBELSKI
ARCHITECTS INC.
1144-1148
TORONTO, ONTARIO
M4M 1B4
TEL: 416-593-1148
FAX: 416-593-1149
WWW.LLAA.COM

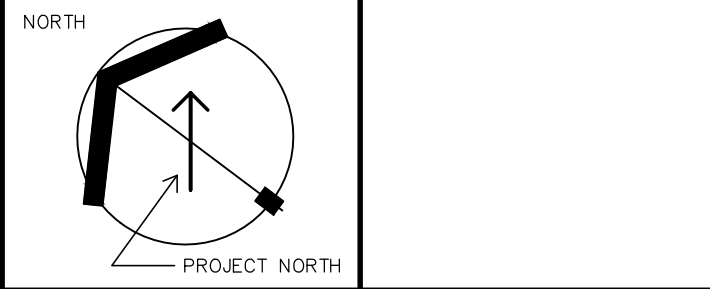

PROJECT
PROPOSED REDEMISE AT
RIOCAN CENTRE WINDSOR
BUILDING G1 (FORMER SEARS)
3051 LEGACY PARK DRIVE WINDSOR, ON

DRAWING TITLE
PROPOSED ROOF PLAN


DRAWN BY	AK	COMM. NO.	19-33
CHECKED	AZ	DRAWING NO.	
SCALE			
DATE	JANUARY 2019		

A3

ELEVATION NOTES


1. PROVIDE PLYWOOD BACKING AT SIGN LOCATIONS AS PER DETAIL 9/A8. EXTENT OF PLYWOOD TO BE COORDINATED TO SUIT TENANT'S SIGNAGE REQUIREMENTS, TYPICAL.
2. FOR STRUCTURAL STEEL SUPPORT SEE STRUCTURAL DRAWINGS.
3. THE EIFS ASSEMBLY INCLUDING THE AIR BARRIER (MARKED ALSO AS "STUCCO FINISH") IS DESIGNED AS DUAL BARRIER DRAINING SYSTEM WITH MIN 10mm AIR SPACE. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO ENSURE THAT DRYVIT SYSTEMS CANADA CARRIES OUT PERIODIC ON-SITE INSPECTIONS TO ENSURE THAT SYSTEM INSTALLATION COMPLETES AND MEETS THE DESIGN CRITERIA, DRYVIT STANDARDS AND THE PERFORMANCE REQUIREMENTS, FINAL CERTIFICATION TO THIS EFFECT TO BE ISSUED BY DRYVIT AT COMPLETION OF CONSTRUCTION.
4. GENERAL CONTRACTOR TO ENSURE ALIGNMENT OF MASONRY CONTROL JOINTS WITH EIFS CONTROL JOINTS. ANY MISALIGNMENT WILL BE REJECTED.
5. CONTRACTOR TO GRIND CLEAN ANY EXCESSIVE CONCRETE ON FOUNDATION WALL AND FILL IN VOIDS (WITH AN EPOXY BASE FILLER), DUE TO FORMING, AND PAINT USING "DEMANDIT" BY DRYVIT.
6. PROVIDE HORIZONTAL EXPANSION JOINTS AT UNDERSIDE OF ALL BEAMS AND VERTICAL/HORIZONTAL CONTROL JOINTS AT CONNECTION OF DISSIMILAR SHEATHINGS.
7. AT ALL WALL MOUNTED LIGHT FIXTURES PROVIDE ADEQUATE BRACKING SUPPORT. G.C. TO COORDINATE GYPSUM BOARD, MASONRY, EIFS AND ELECTRICAL SUB TRADES.
8. ENSURE BOTTOM OF CAVITIES TO BE FREE OF MORTAR DROPPINGS AND EIFS BOARD DUST. SHOULD BLOCKAGE OCCUR OR BE OBSERVED ON SITE, WHEN MASONRY ACHIEVES FULL STRENGTH, REMOVE EVERY THIRD BLOCK, CLEAN BOTTOM OF CAVITY AND REINSTATE MASONRY UNITS - TYP.
9. ALL EXISTING EXTERIOR MASONRY TO BE ACID/ POWER WASHED.

27'-0" 1/0 NEW HIGH MARQUEE
21'-0" 1/0 OF EXISTING PARAPET
19'-0" U/S OF ROOF DECK
0'-0" 1/0 FINISHED GROUND FLOOR

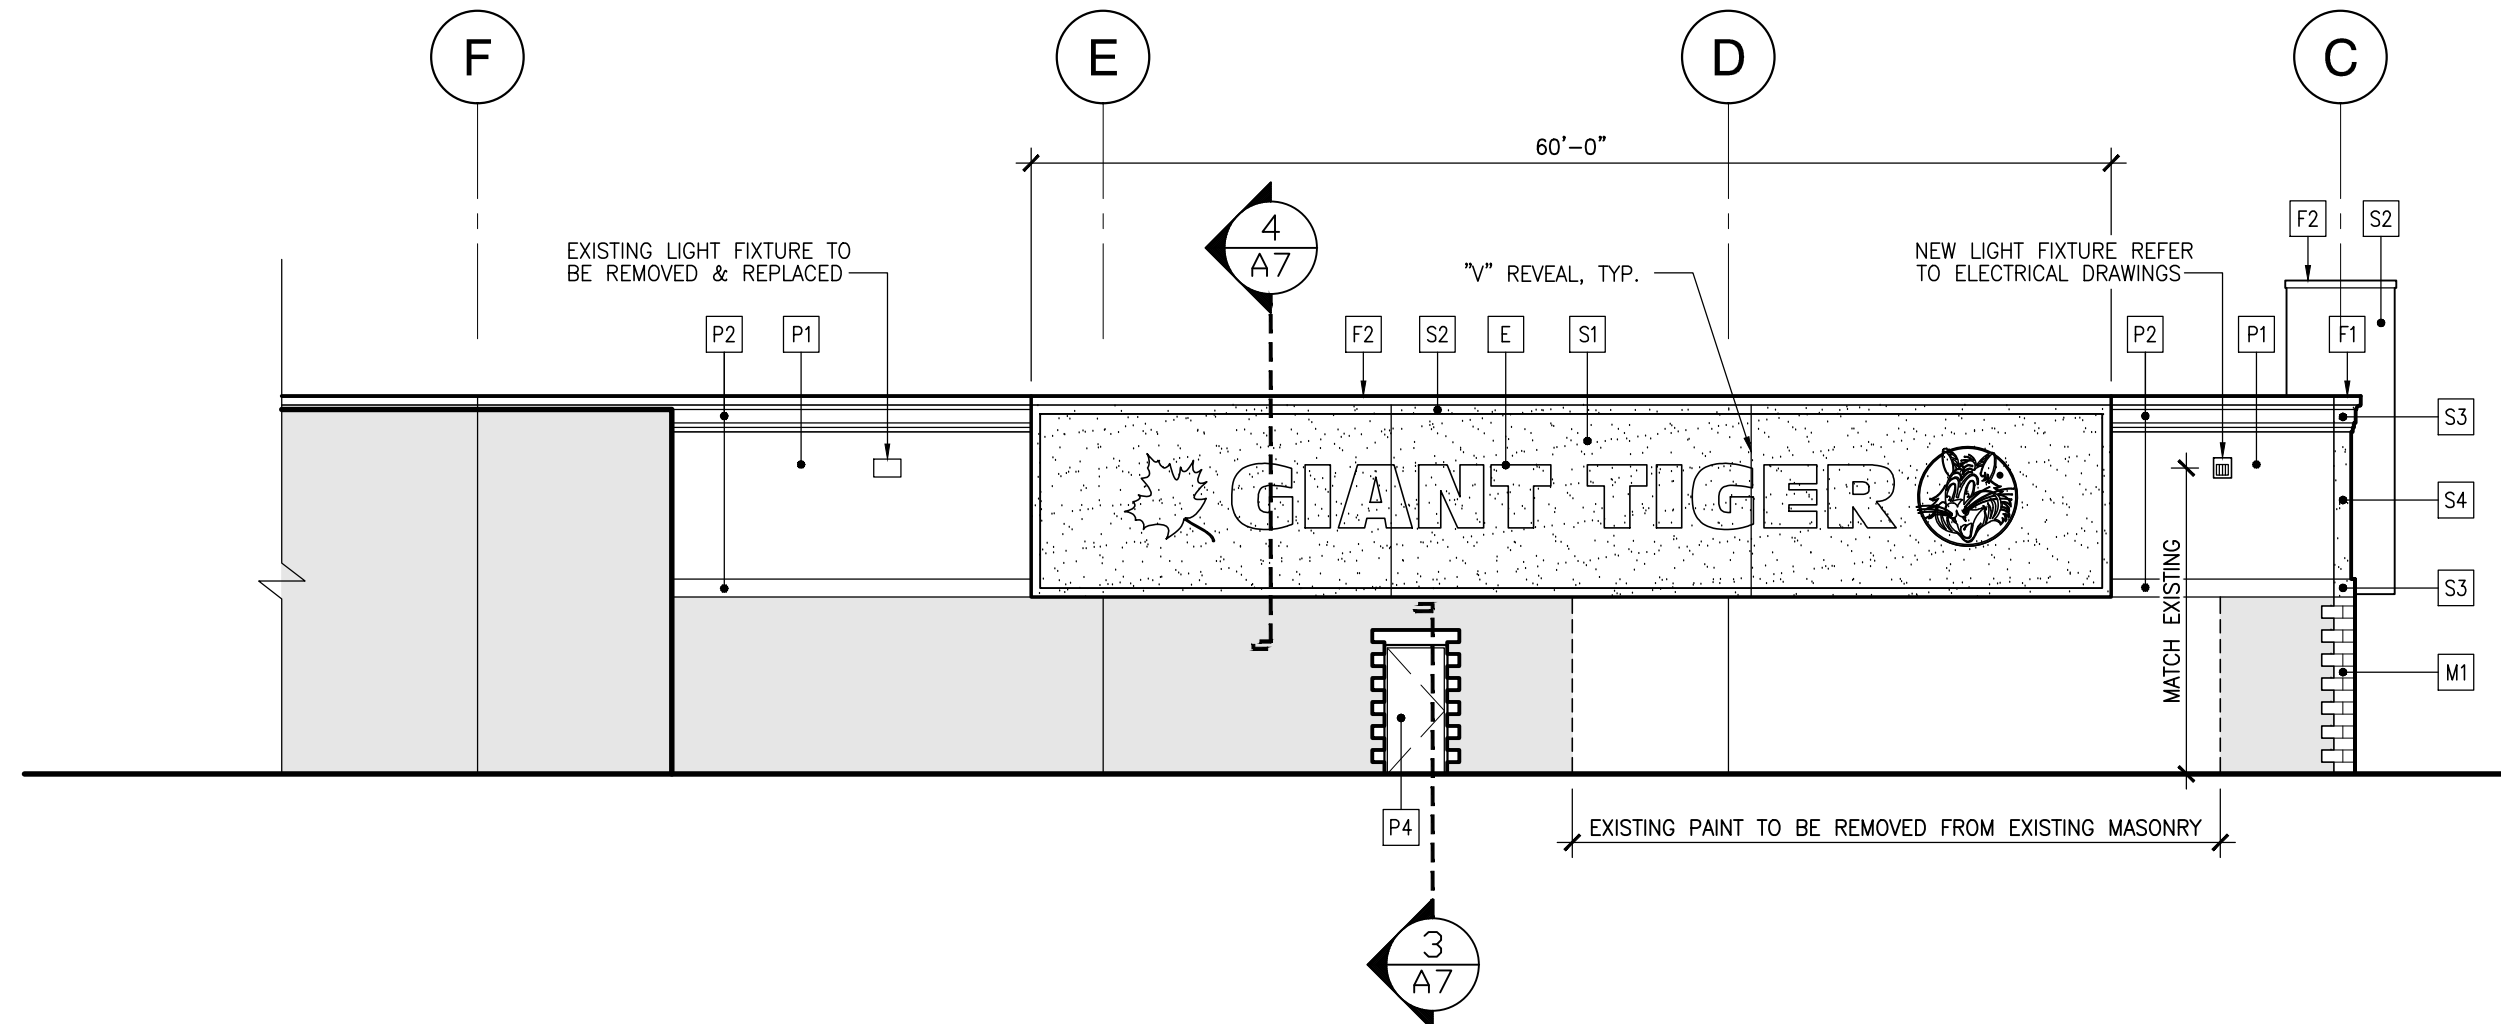


4 PROPOSED EAST ELEVATION
SCALE: 3/32" = 1'-0"

27'-0" 1/0 NEW HIGH MARQUEE
21'-0" 1/0 OF EXISTING PARAPET
19'-0" U/S OF ROOF DECK
0'-0" 1/0 FINISHED GROUND FLOOR

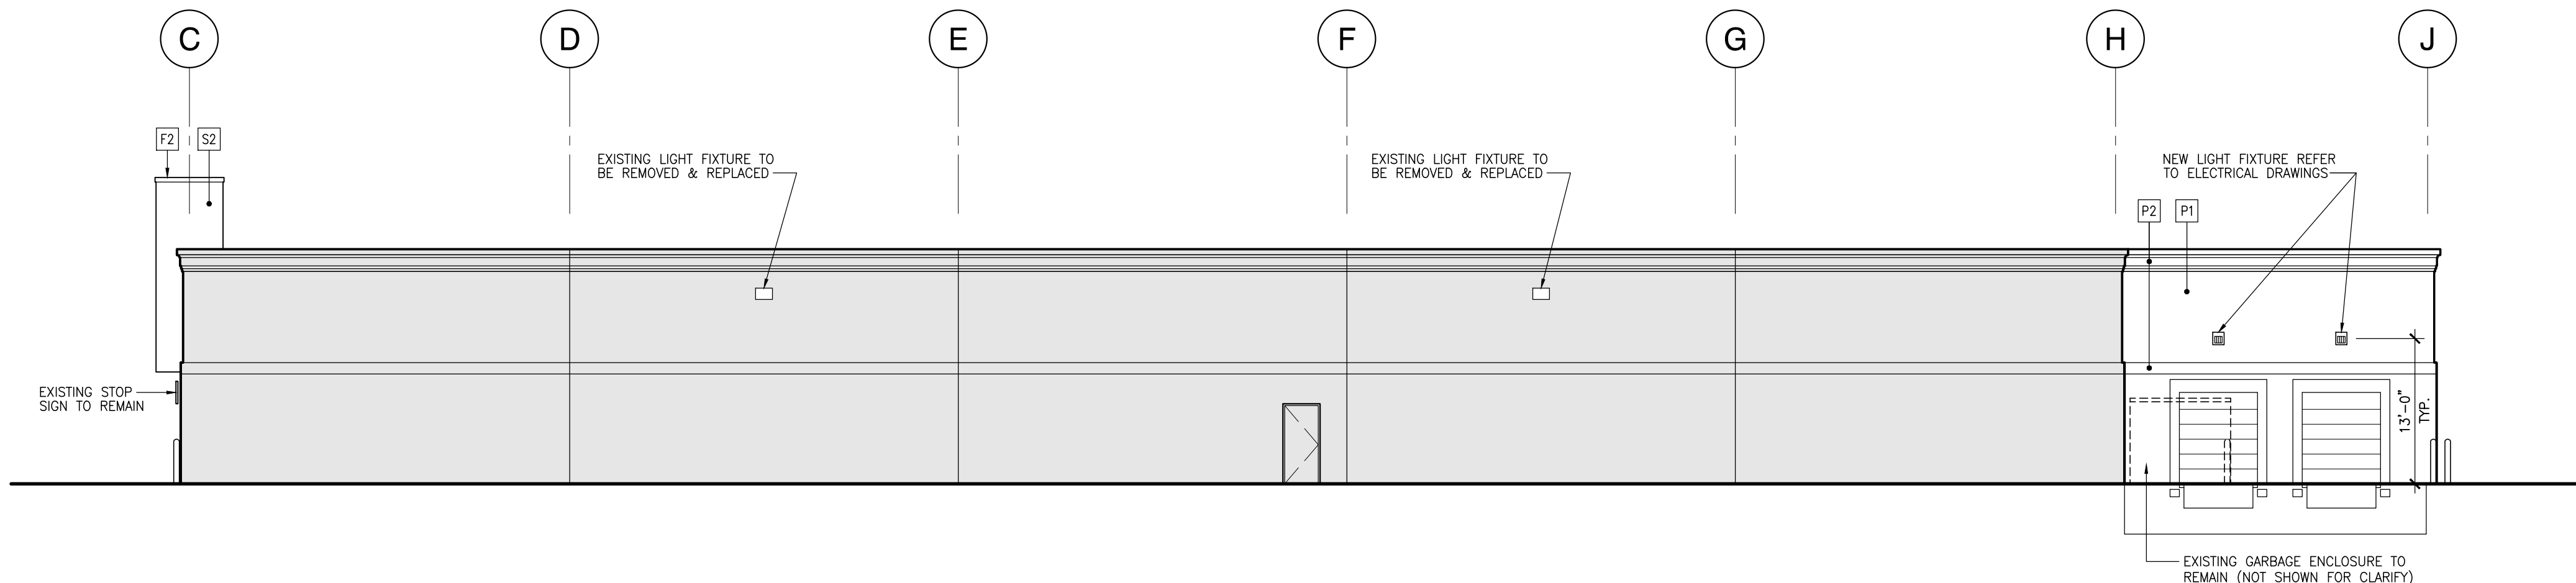


3 PROPOSED WEST ELEVATION
SCALE: 3/32" = 1'-0"

27'-0" 1/0 NEW HIGH MARQUEE
21'-0" 1/0 OF EXISTING PARAPET
19'-0" U/S OF ROOF DECK
0'-0" 1/0 FINISHED GROUND FLOOR

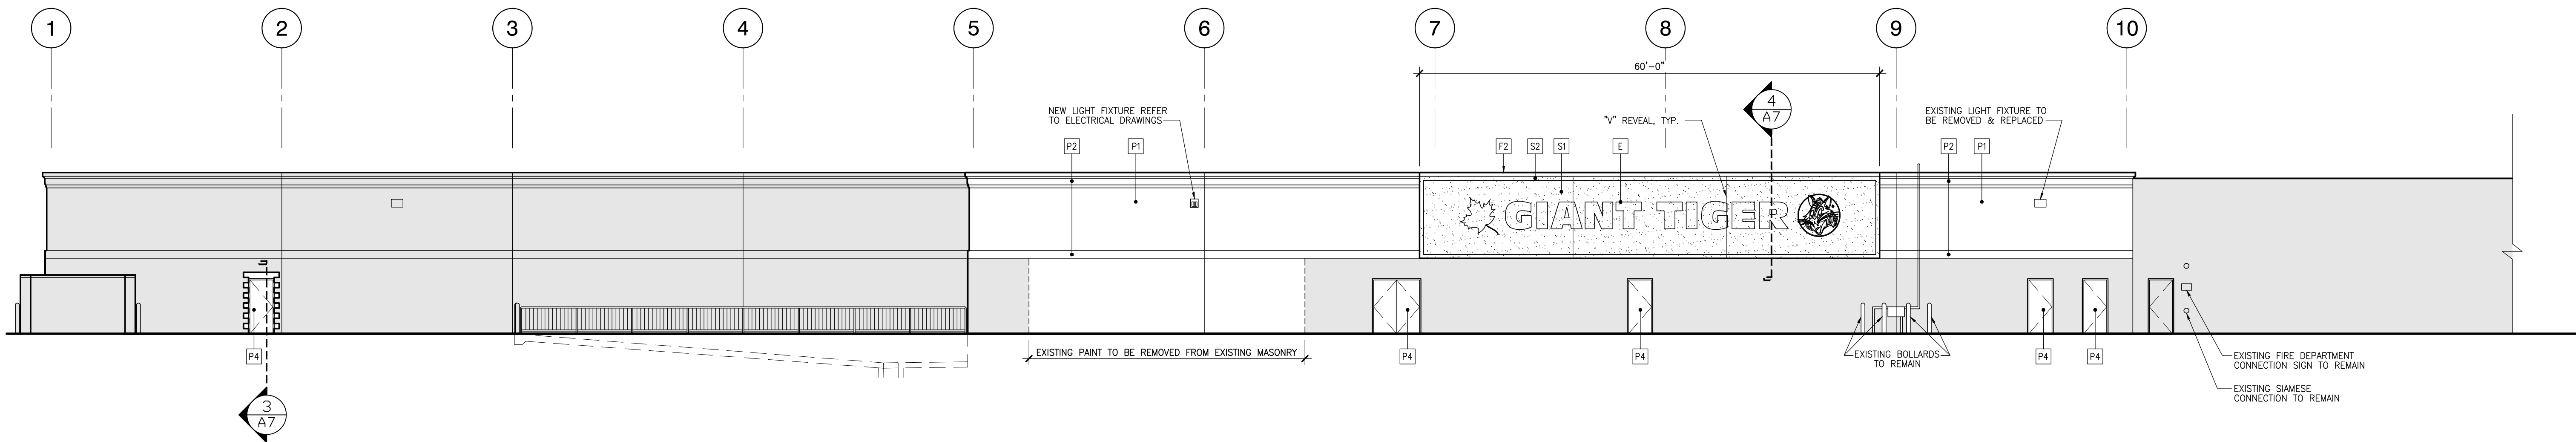

2 PROPOSED SOUTH ELEVATION
SCALE: 3/32" = 1'-0"

27'-0" 1/0 NEW HIGH MARQUEE
21'-0" 1/0 OF EXISTING PARAPET
19'-0" U/S OF ROOF DECK
0'-0" 1/0 FINISHED GROUND FLOOR

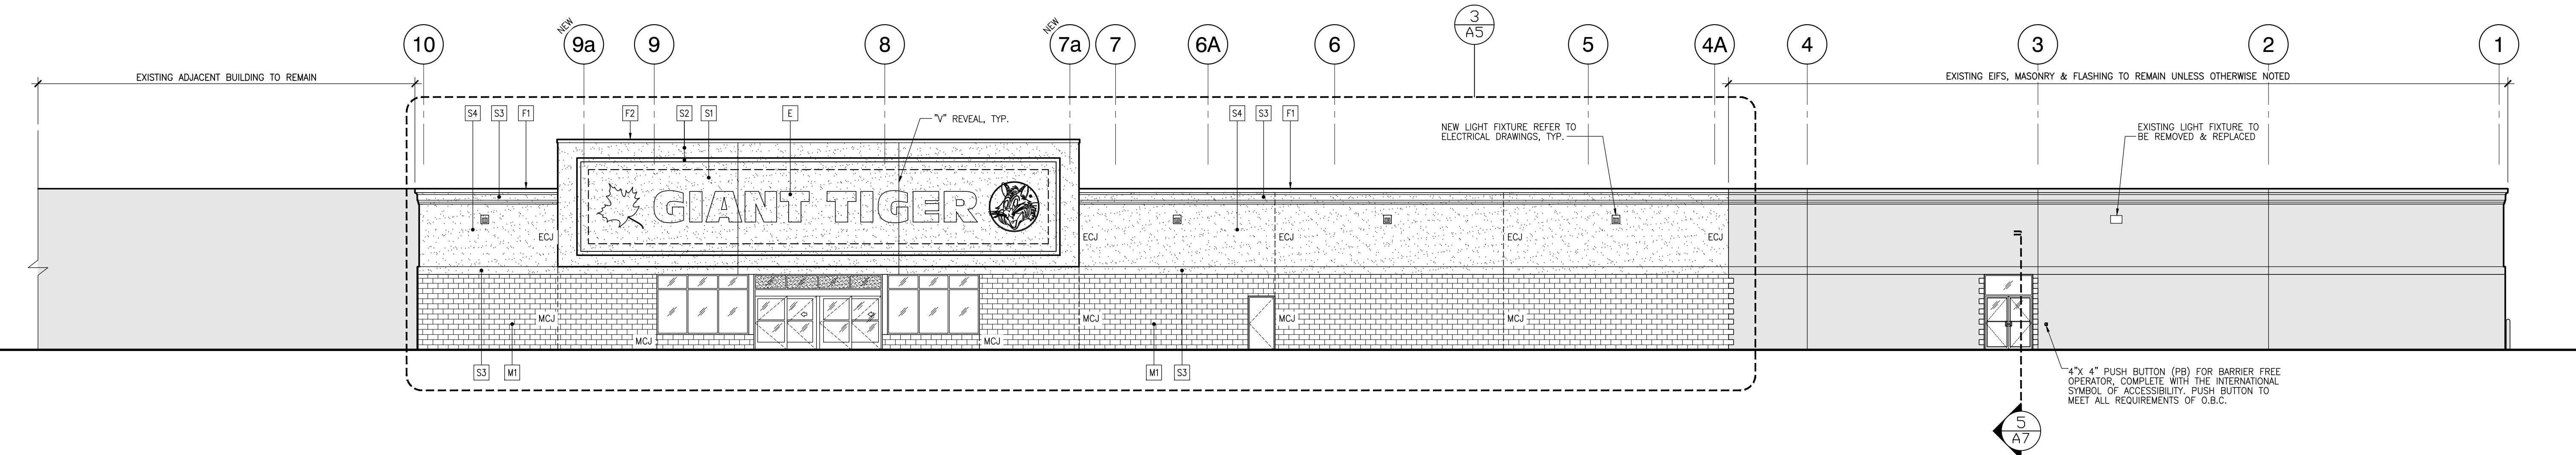

1 PROPOSED NORTH ELEVATION
SCALE: 3/32" = 1'-0"

EXTERIOR FINISHES LEGEND

- M1 ARCHITECTURAL BLOCK, DRY-BLOCK TYPE, COLOR & FINISH TO MATCH EXISTING
- S1 EIFS STUCCO COLOR 1, TO MATCH BENJAMIN MOORE #2021-30 "SUNSHINE YELLOW", (GIANT TIGER YELLOW) SANDPEBBLE FINISH BY DRYVIT SYSTEMS OF CANADA OR DUROCK ALFACING LTD.
- S2 EIFS STUCCO COLOR 2, "ICE MIST", TO MATCH BENJAMIN MOORE 00-67 FINISH BY DRYVIT SYSTEMS OF CANADA OR DUROCK ALFACING LTD.
- S3 EIFS STUCCO COLOR 3, TO MATCH EXISTING BY DRYVIT SYSTEMS OF CANADA OR DUROCK ALFACING LTD.
- S4 EIFS STUCCO COLOR 4 TO MATCH EXISTING BY DRYVIT SYSTEMS OF CANADA OR DUROCK ALFACING LTD.
- F1 PRE-FINISHED METAL FLASHING BY VICWEST, "VW-6161 CAMBRIDGE WHITE" OR APPROVED EQUAL
- F2 PRE-FINISHED METAL FLASHING BY VICWEST, "VW-6161 CAMBRIDGE WHITE" OR APPROVED EQUAL
- E ILLUMINATED SIGNAGE BY TENANT, PROVIDE EMPTY CONDUIT WITH PULL STRING TO TENANT'S ELECT. PANEL AT U/S OF DECK-TYP. (SEE ELEC.). NOT PART OF THIS PERMIT APPLICATION
- P1 EXISTING EIFS FINISH TO BE PAINTED TO MATCH S4 USING "DEMANDIT" BY DRYVIT SYSTEM CANADA.
- P2 EXISTING EIFS FINISH TO BE PAINTED TO MATCH S3 USING "DEMANDIT" BY DRYVIT SYSTEM CANADA.
- P4 NEW HOLLOW METAL DOOR & FRAME TO BE PAINTED TO MATCH EXISTING
- EXISTING WALL MOUNTED LIGHT FIXTURE TO BE REMOVED & REPLACED
- NEW WALL MOUNTED LIGHT FIXTURE, REFER TO ELECTRICAL DRAWINGS
- SP DENOTES SPANDREL GLAZING - TYPICAL
- HCI HORIZONTAL CONTROL JOINT
- ECJ EIFS CONTROL JOINT
- MCJ MASONRY CONTROL JOINT
- BARrier-FREE PUSH BUTTON, PUSH BUTTON TO HAVE NO FACE DIMENSION LESS THAN 6" DIA. OR 2"x4" RECTANGULAR, BE LOCATED 3'-6" AFF TO CENTERLINE & NOT LESS THAN 2'-0" AND NOT MORE THAN 4'-11" BEYOND THE DOOR SWING. WHERE THE DOOR OPENS TOWARDS THE CONTROL, CONTAIN THE SIGN INCORPORATING THE INTERNATIONAL SYMBOL OF ACCESSIBILITY & MEET ALL REQUIREMENTS OF THE O.B.C. AND AUTHORITIES HAVING JURISDICTION.

NOTE:
G.C. TO PROVIDE SAMPLES OF ALL ARCHITECTURAL FINISHES FOR REVIEW.

REV	BY	DESCRIPTION	DATE
AZ		ISSUED FOR CONSTRUCTION	18 MAR. 2019
AZ		ISSUED FOR TENDER	11 FEB. 2019
AZ		ISSUED FOR PERMIT	01 FEB. 2019
REV	BY	DESCRIPTION	DATE

CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS ON SITE. DO NOT SCALE DRAWINGS.



RIOCAN
MANAGEMENT INC.
RIOCAN YONGE EQUITON CENTRE, 500-2300 YONGE STREET
P.O. Box 2386, TORONTO, ON, M4P 1E4

LEON LUBELSKI
ARCHITECTS INC.
TORONTO, ONTARIO
416-593-1111
WWW.LLAA-ARCH.COM

PROJECT PROPOSED REDEMISE AT
RIOCAN CENTRE WINDSOR
BUILDING G1 (FORMER SEARS)
3051 LEGACY PARK DRIVE WINDSOR, ON

DRAWING TITLE
PROPOSED EXTERIOR ELEVATIONS

DRAWN BY	FC	COMM. NO.	19-33
CHECKED	AZ	DRAWING NO.	
SCALE			A4
DATE	JANUARY 2019		



	AZ	ISSUED FOR CONSTRUCTION	18 MAR 2019
	AZ	ISSUED FOR ADDENDUM NO. 1	15 FEB 2019
	AZ	ISSUED FOR TENDER	11 FEB 2019
	AZ	ISSUED FOR PERMIT	01 FEB 2019
REV	BY	DESCRIPTION	DATE
REVISIONS			

CONTRACTOR SHALL CHECK AND VERIFY
ALL DIMENSIONS ON SITE
DO NOT SCALE DRAWINGS

RIO CAN
MANAGEMENT INC.
RIOCAN YONGE EGLINTON CENTRE, 500-2300 YONGE STREET
P.O. Box 2386, TORONTO, ON, M4P 1E4



A diagram of a circular structure, possibly a dome or a well, with a vertical dashed line labeled "PROJECT NORTH". A thick black line segment is shown on the right side of the circle, extending from the bottom edge towards the center.


PROJECT

PROPOSED REDEMISE AT
RIOCAN CENTRE WINDSOR
BUILDING G1 (FORMER SEARS)
3051 LEGACY PARK DRIVE WINDSOR, ON


ENLARGED NORTH STOREFRONT

DRAWN BY	AK/FC	COMM. NO.	19-33
CHECKED	AZ	DRAWING NO.	A5
SCALE			
DATE	JANUARY 2019		


ORDER NO. 100419

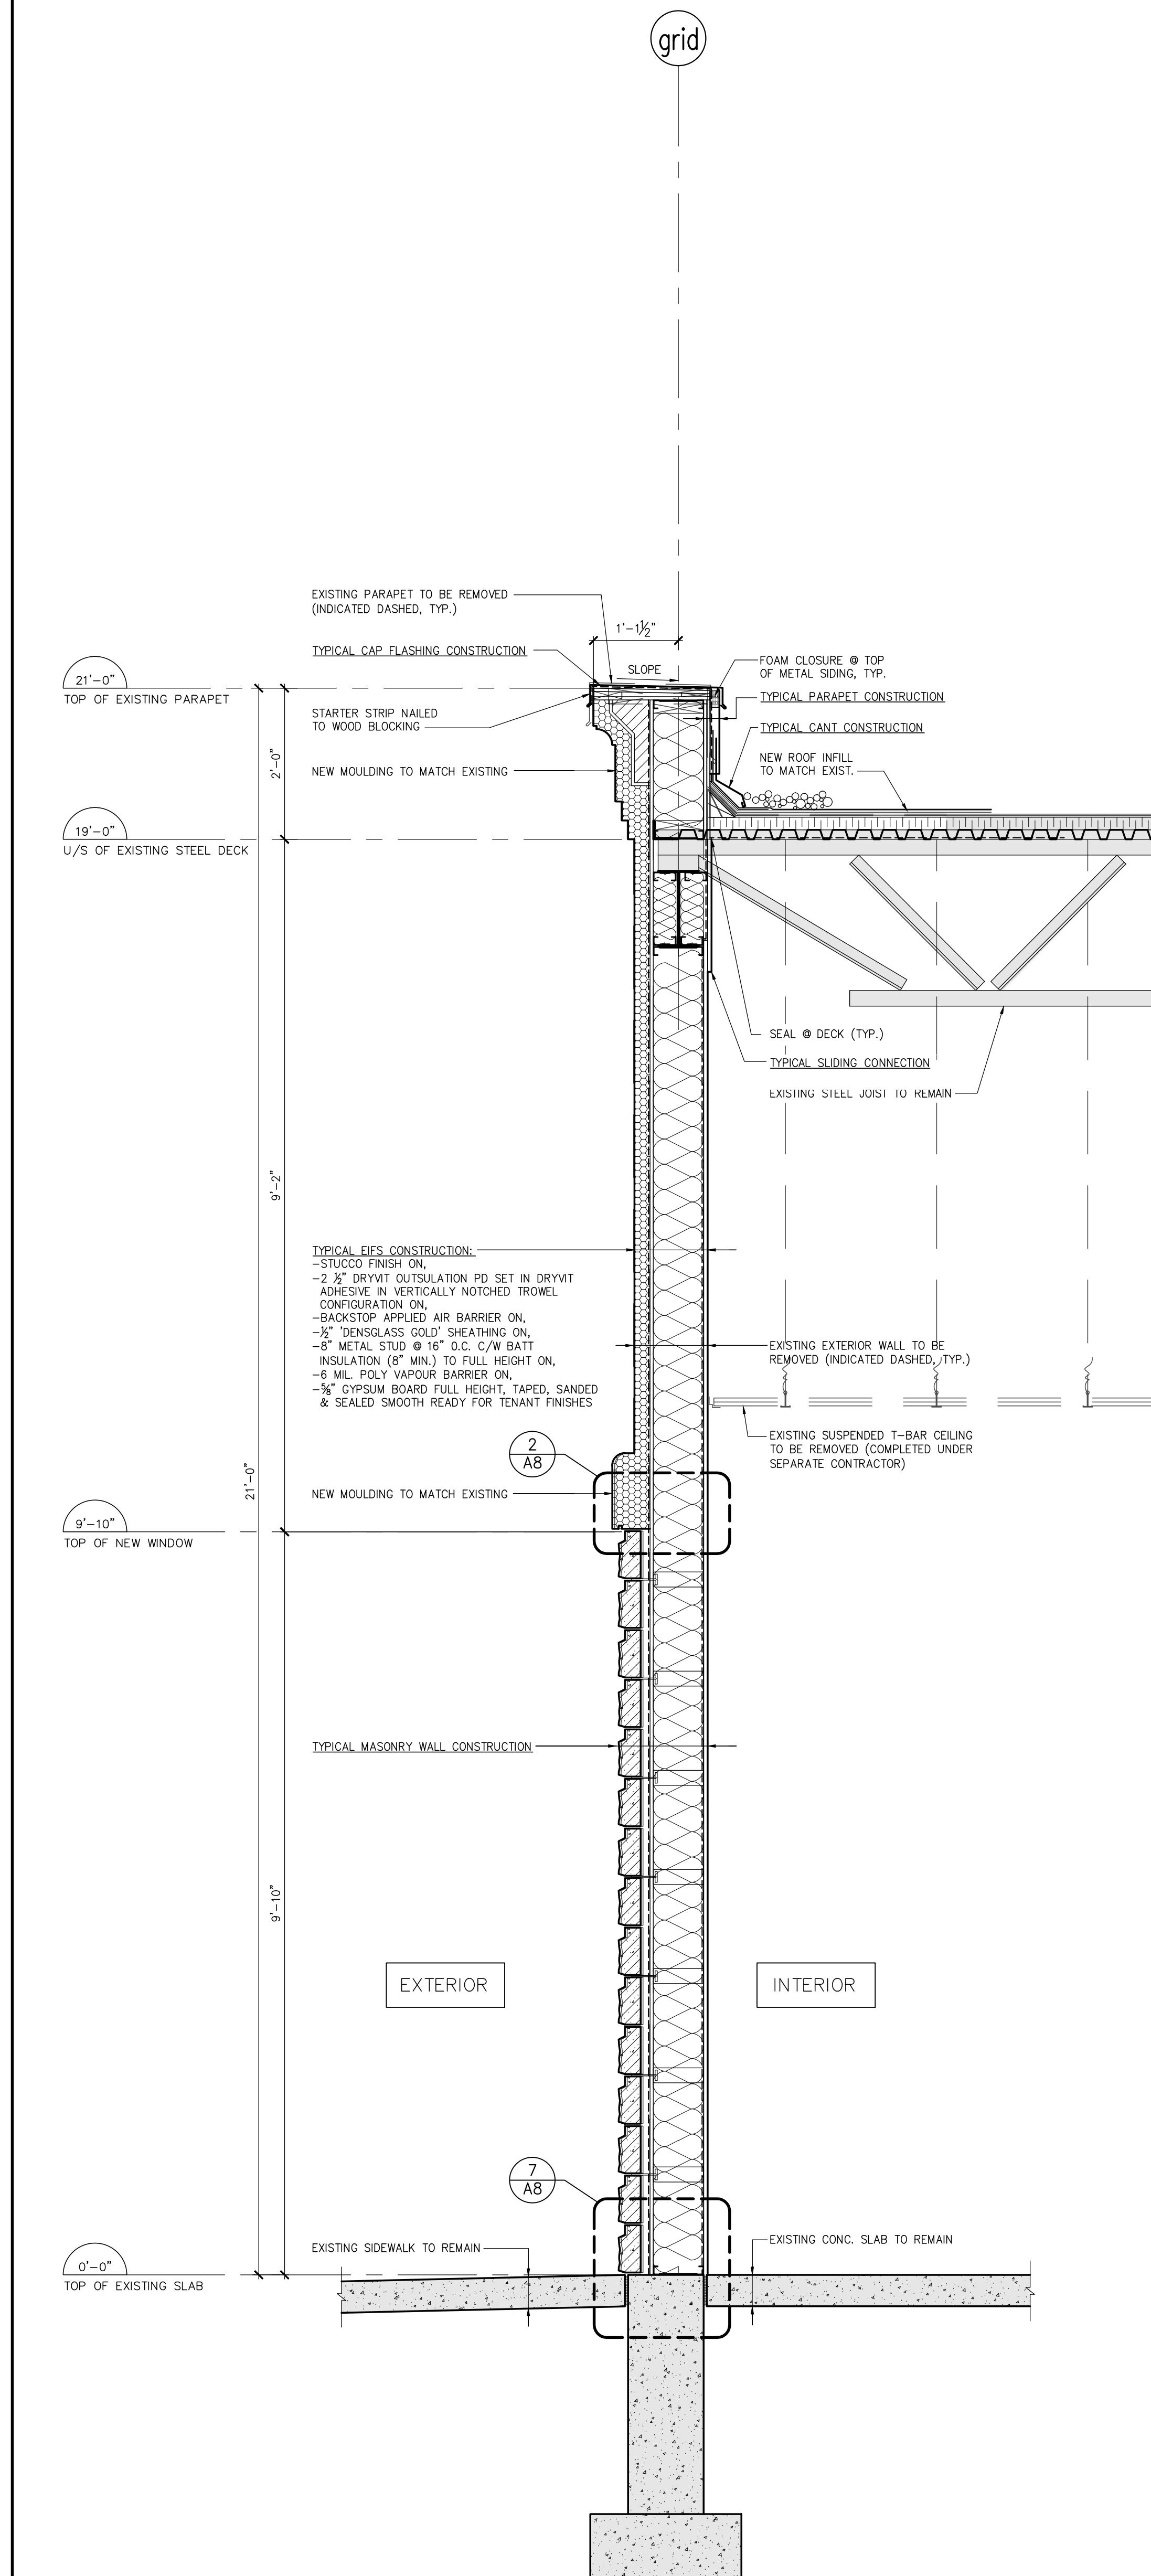

3 WALL SECTION
SCALE: 3/4" = 1'-0"

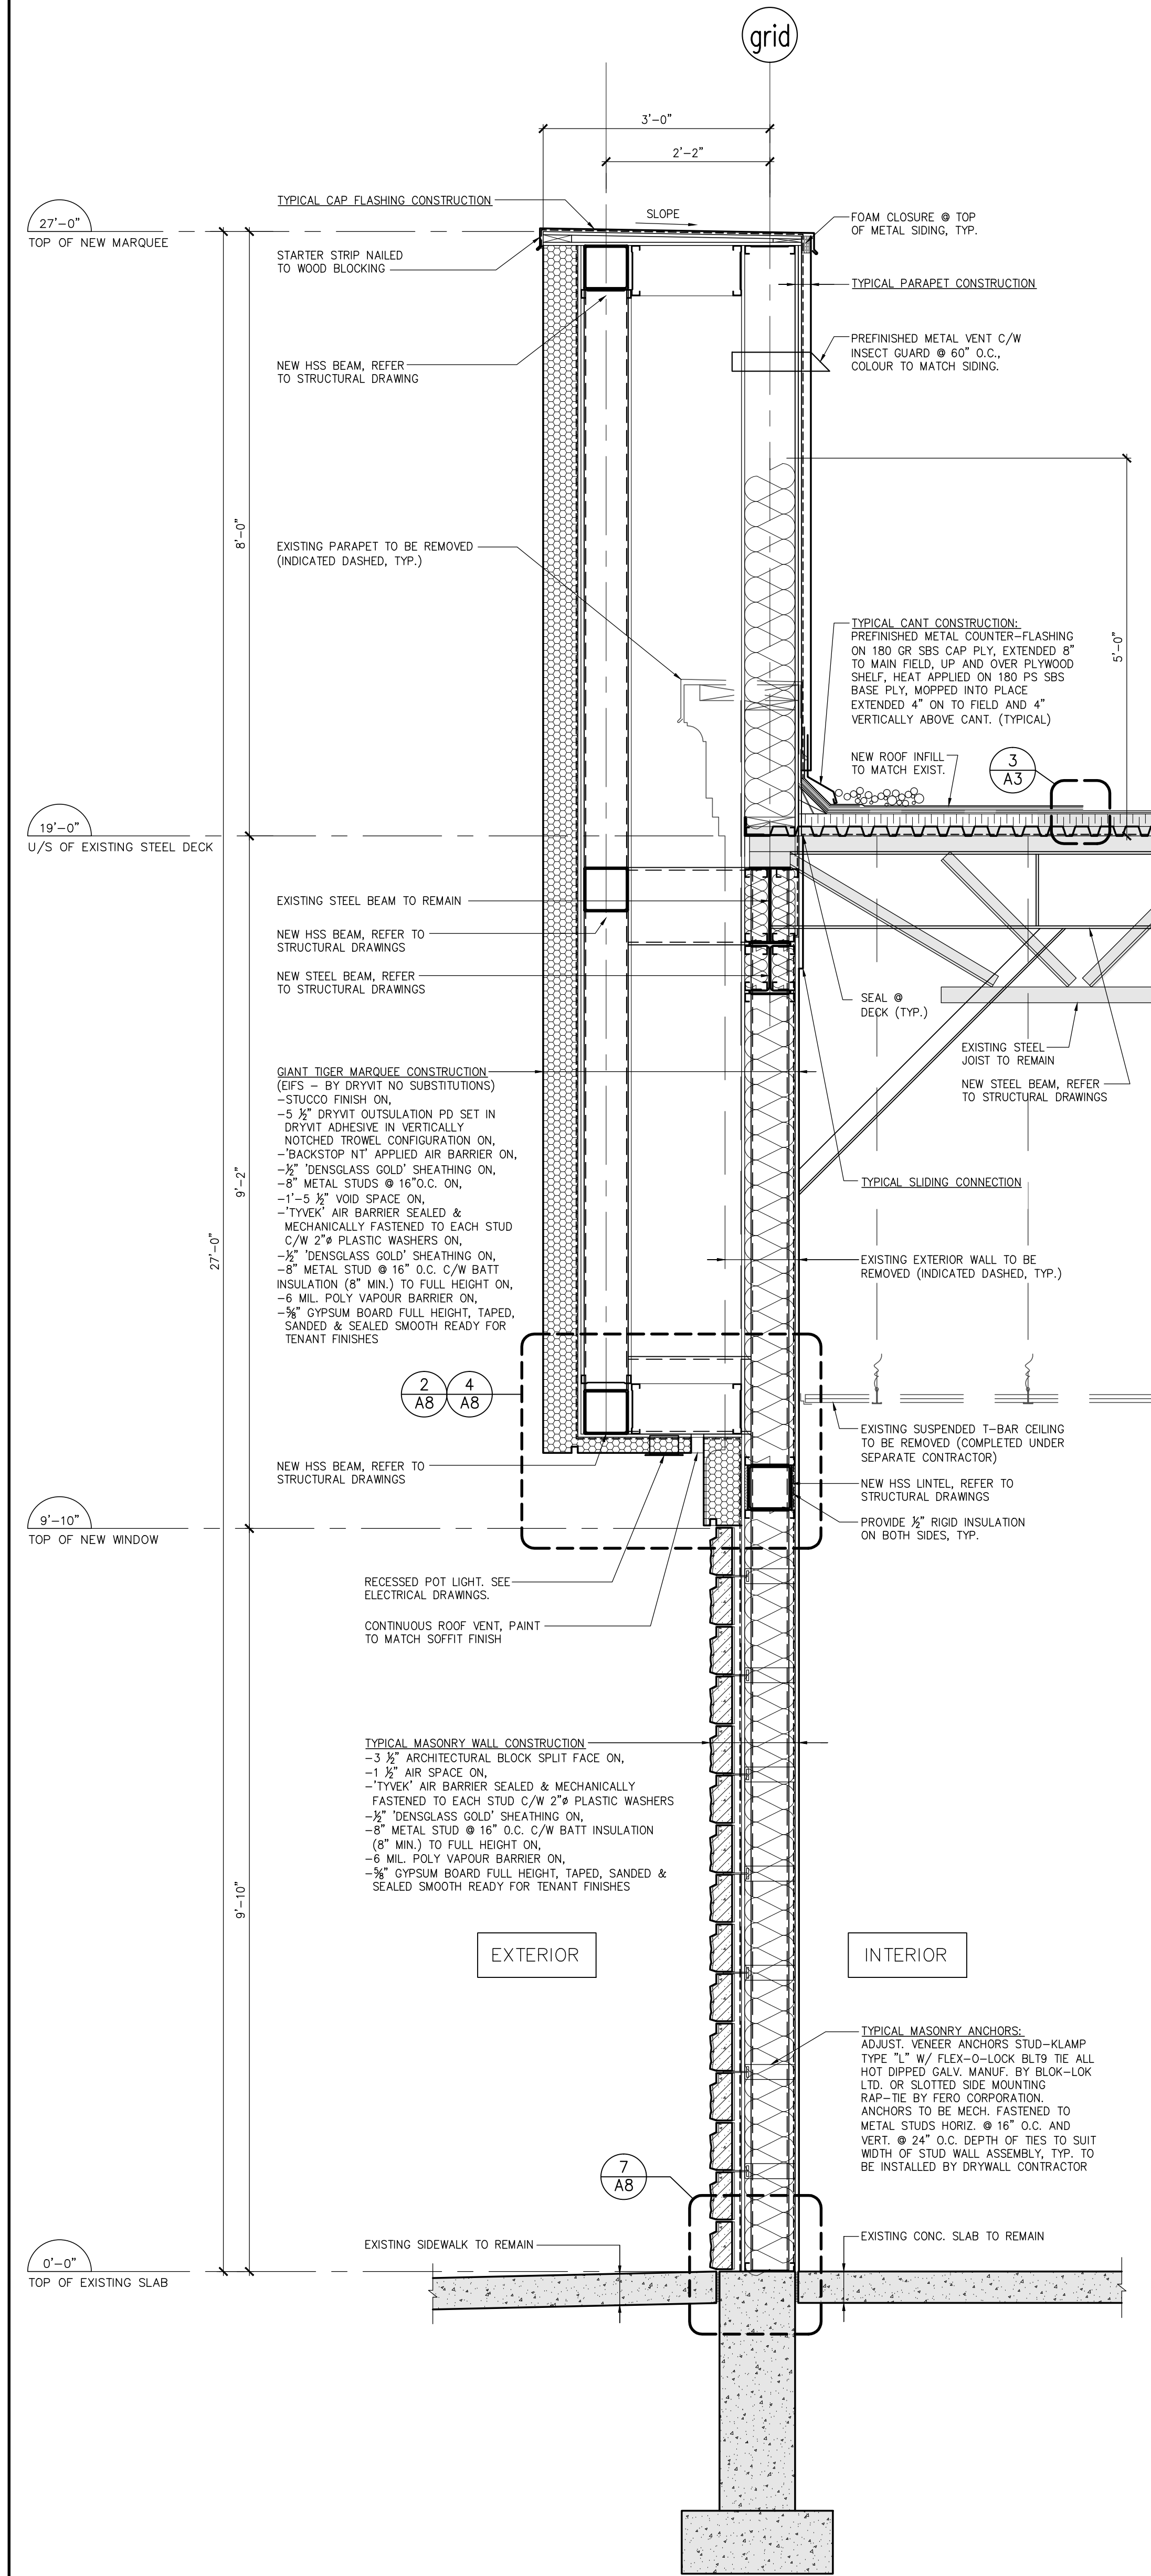

2 WALL SECTION
SCALE: 3/4" = 1'-0"

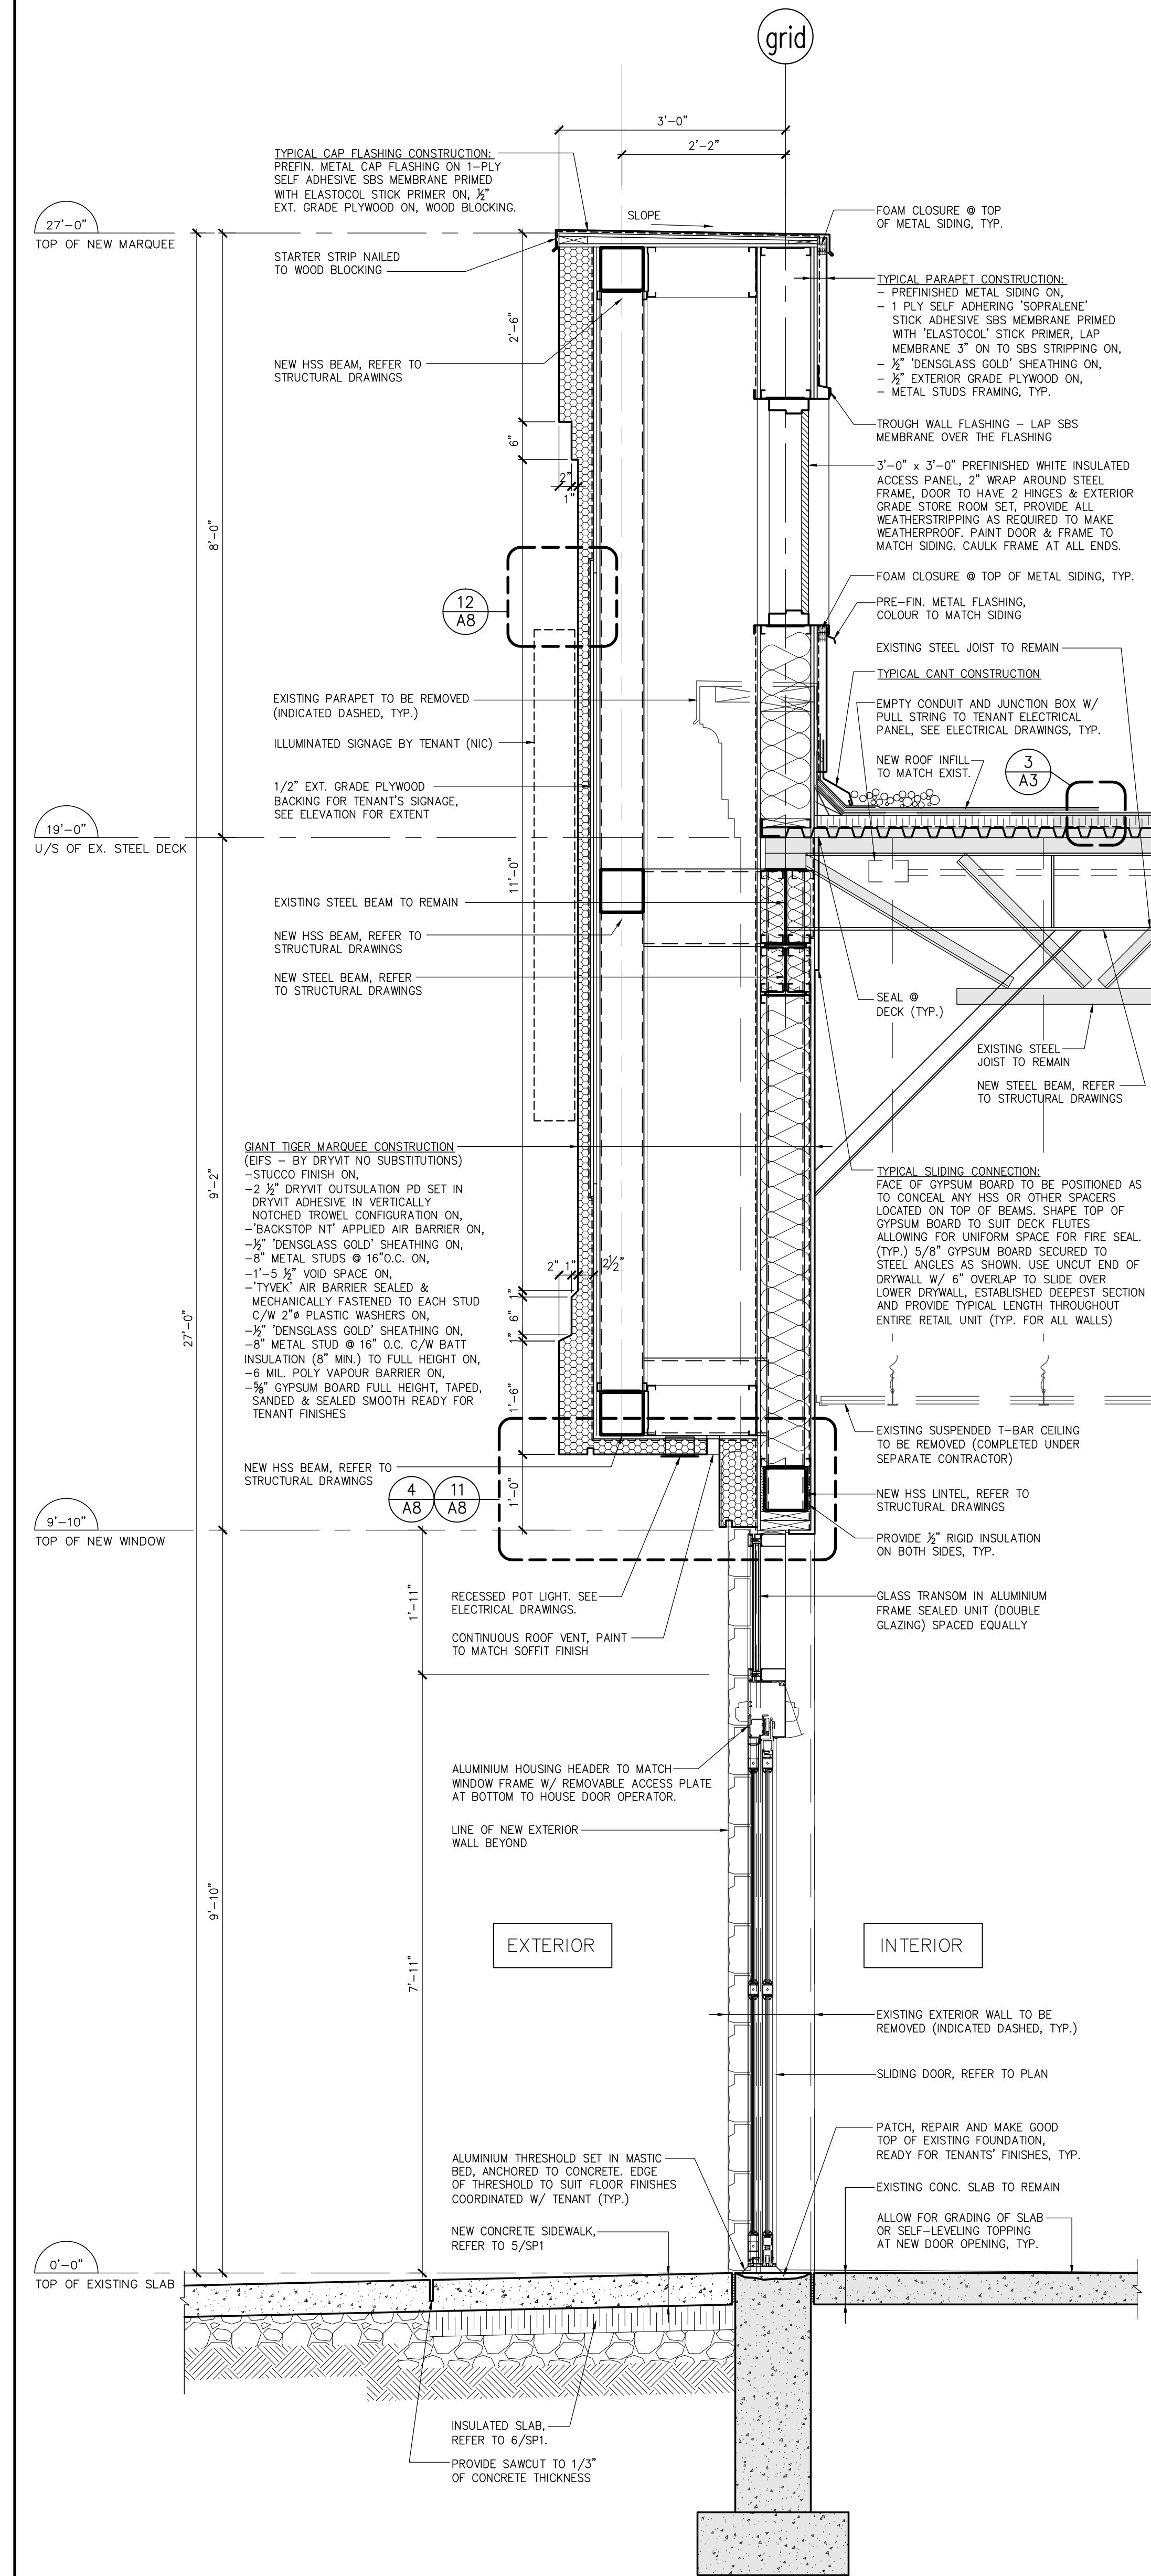

1 WALL SECTION
SCALE: 3/4" = 1'-0"

CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS ON SITE. DO NOT SCALE DRAWINGS.


RIOCAN
MANAGEMENT INC.
RIOCAN YONGE EGLINTON CENTRE, 500-2300 YONGE STREET
P.O. Box 2386, TORONTO, ON, M4P 1E4

LEON LUBELSKI
ARCHITECTS INC.
1200 YONGE STREET, 11TH FLOOR, TORONTO, ON M4T 1Y4
416-593-1111


PROJECT: PROPOSED REDEMISE AT
RIOCAN CENTRE WINDSOR
BUILDING G1 (FORMER SEARS)
3051 LEGACY PARK DRIVE WINDSOR, ON

DRAWING TITLE: **WALL SECTIONS**


DRAWN BY: FC	COMM. NO.: 19-33
CHECKED: AZ	DRAWING NO.: A6
SCALE:	
DATE: JANUARY 2019	

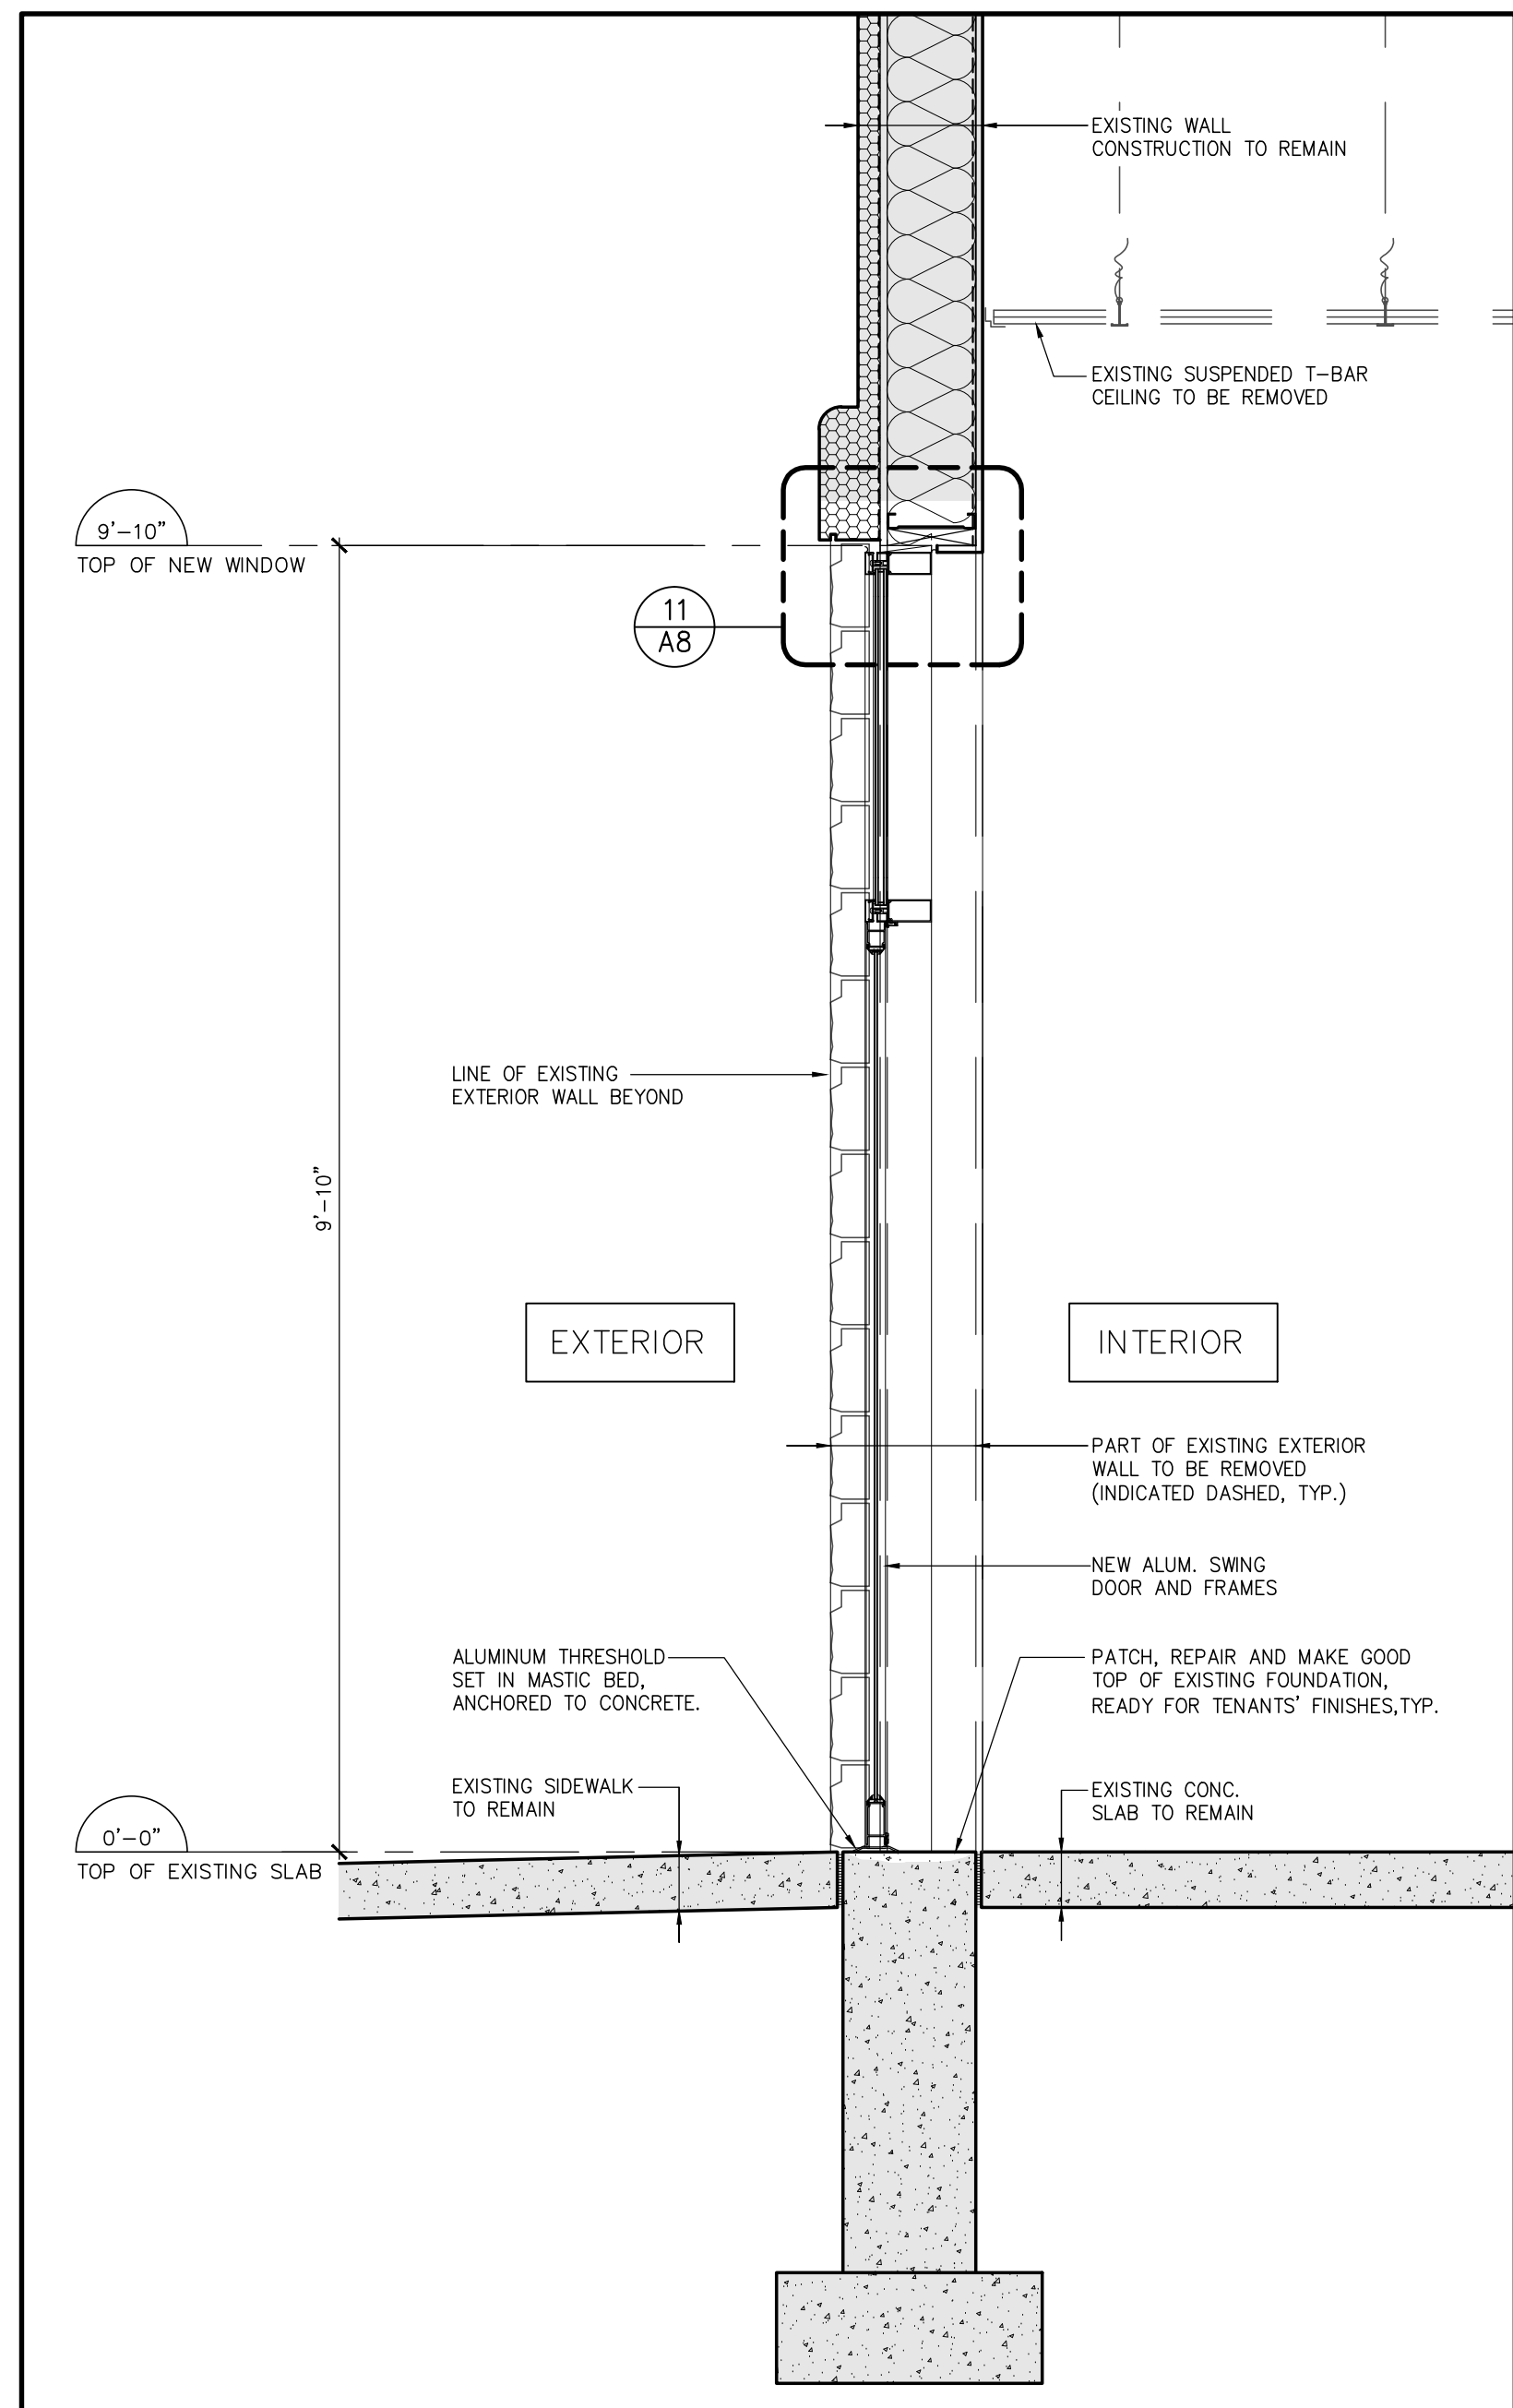


5 WALL SECTION
SCALE: 3/4" = 1'-0"

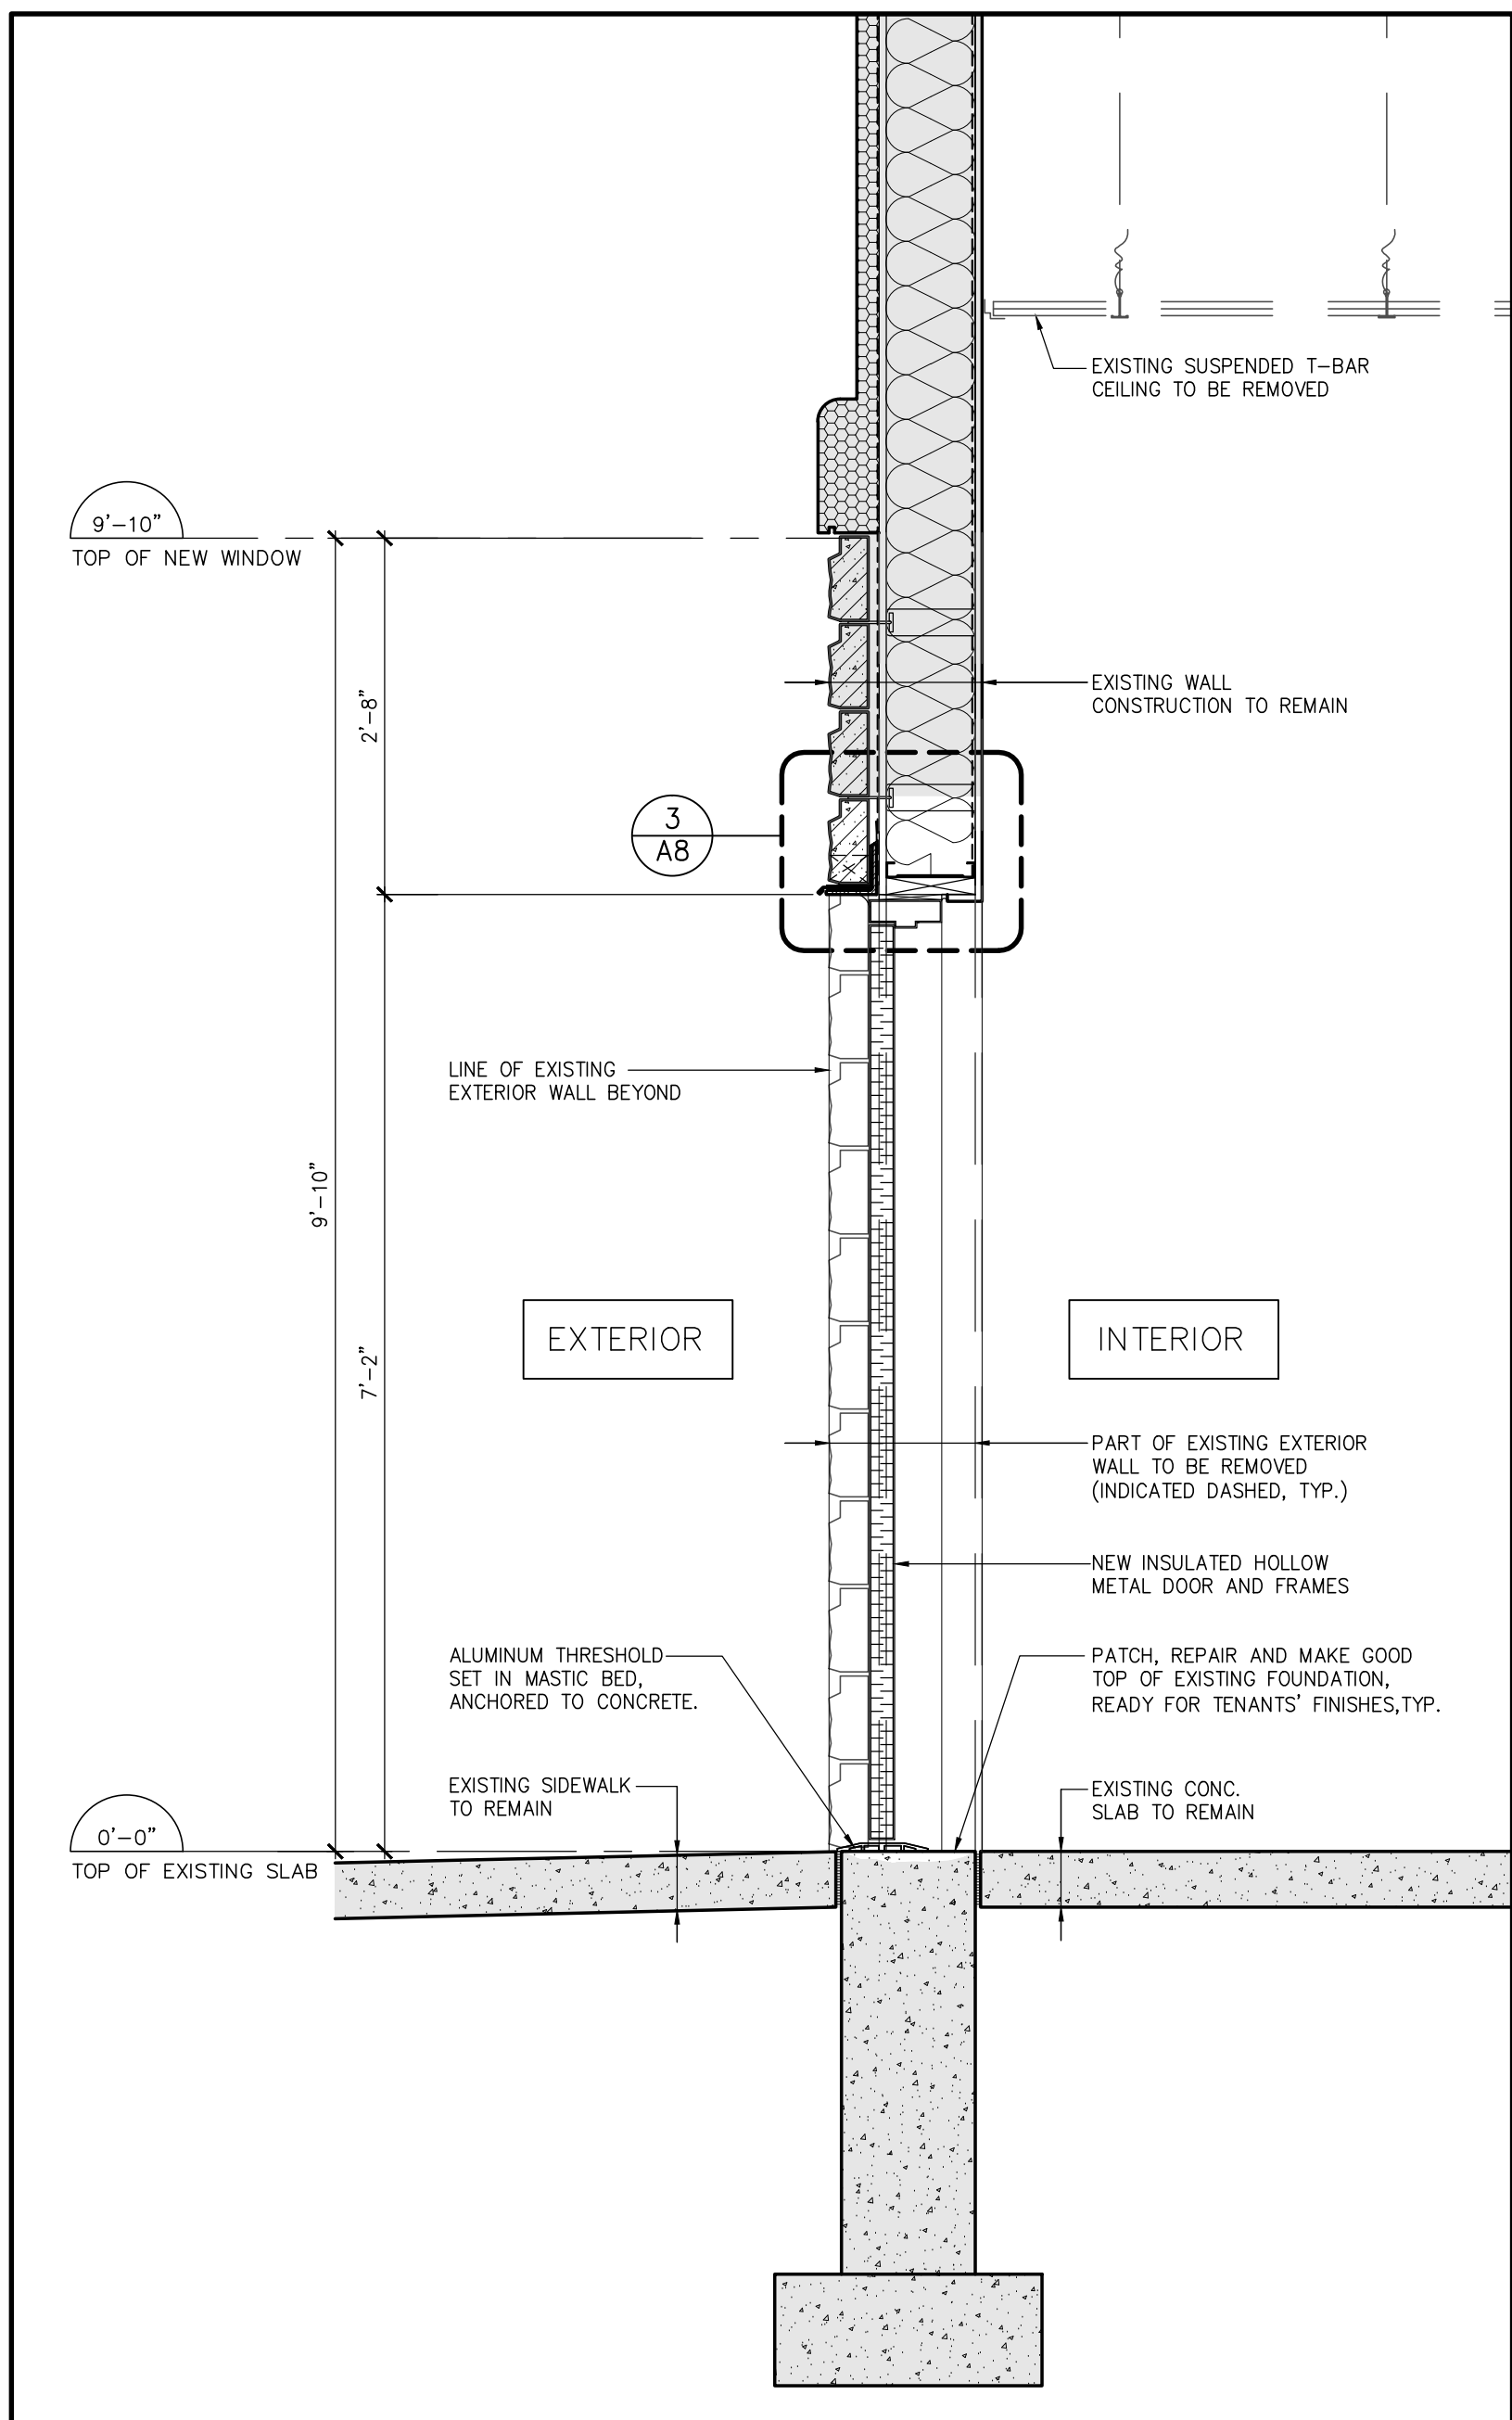


3 WALL SECTION
SCALE: 3/4" = 1'-0"

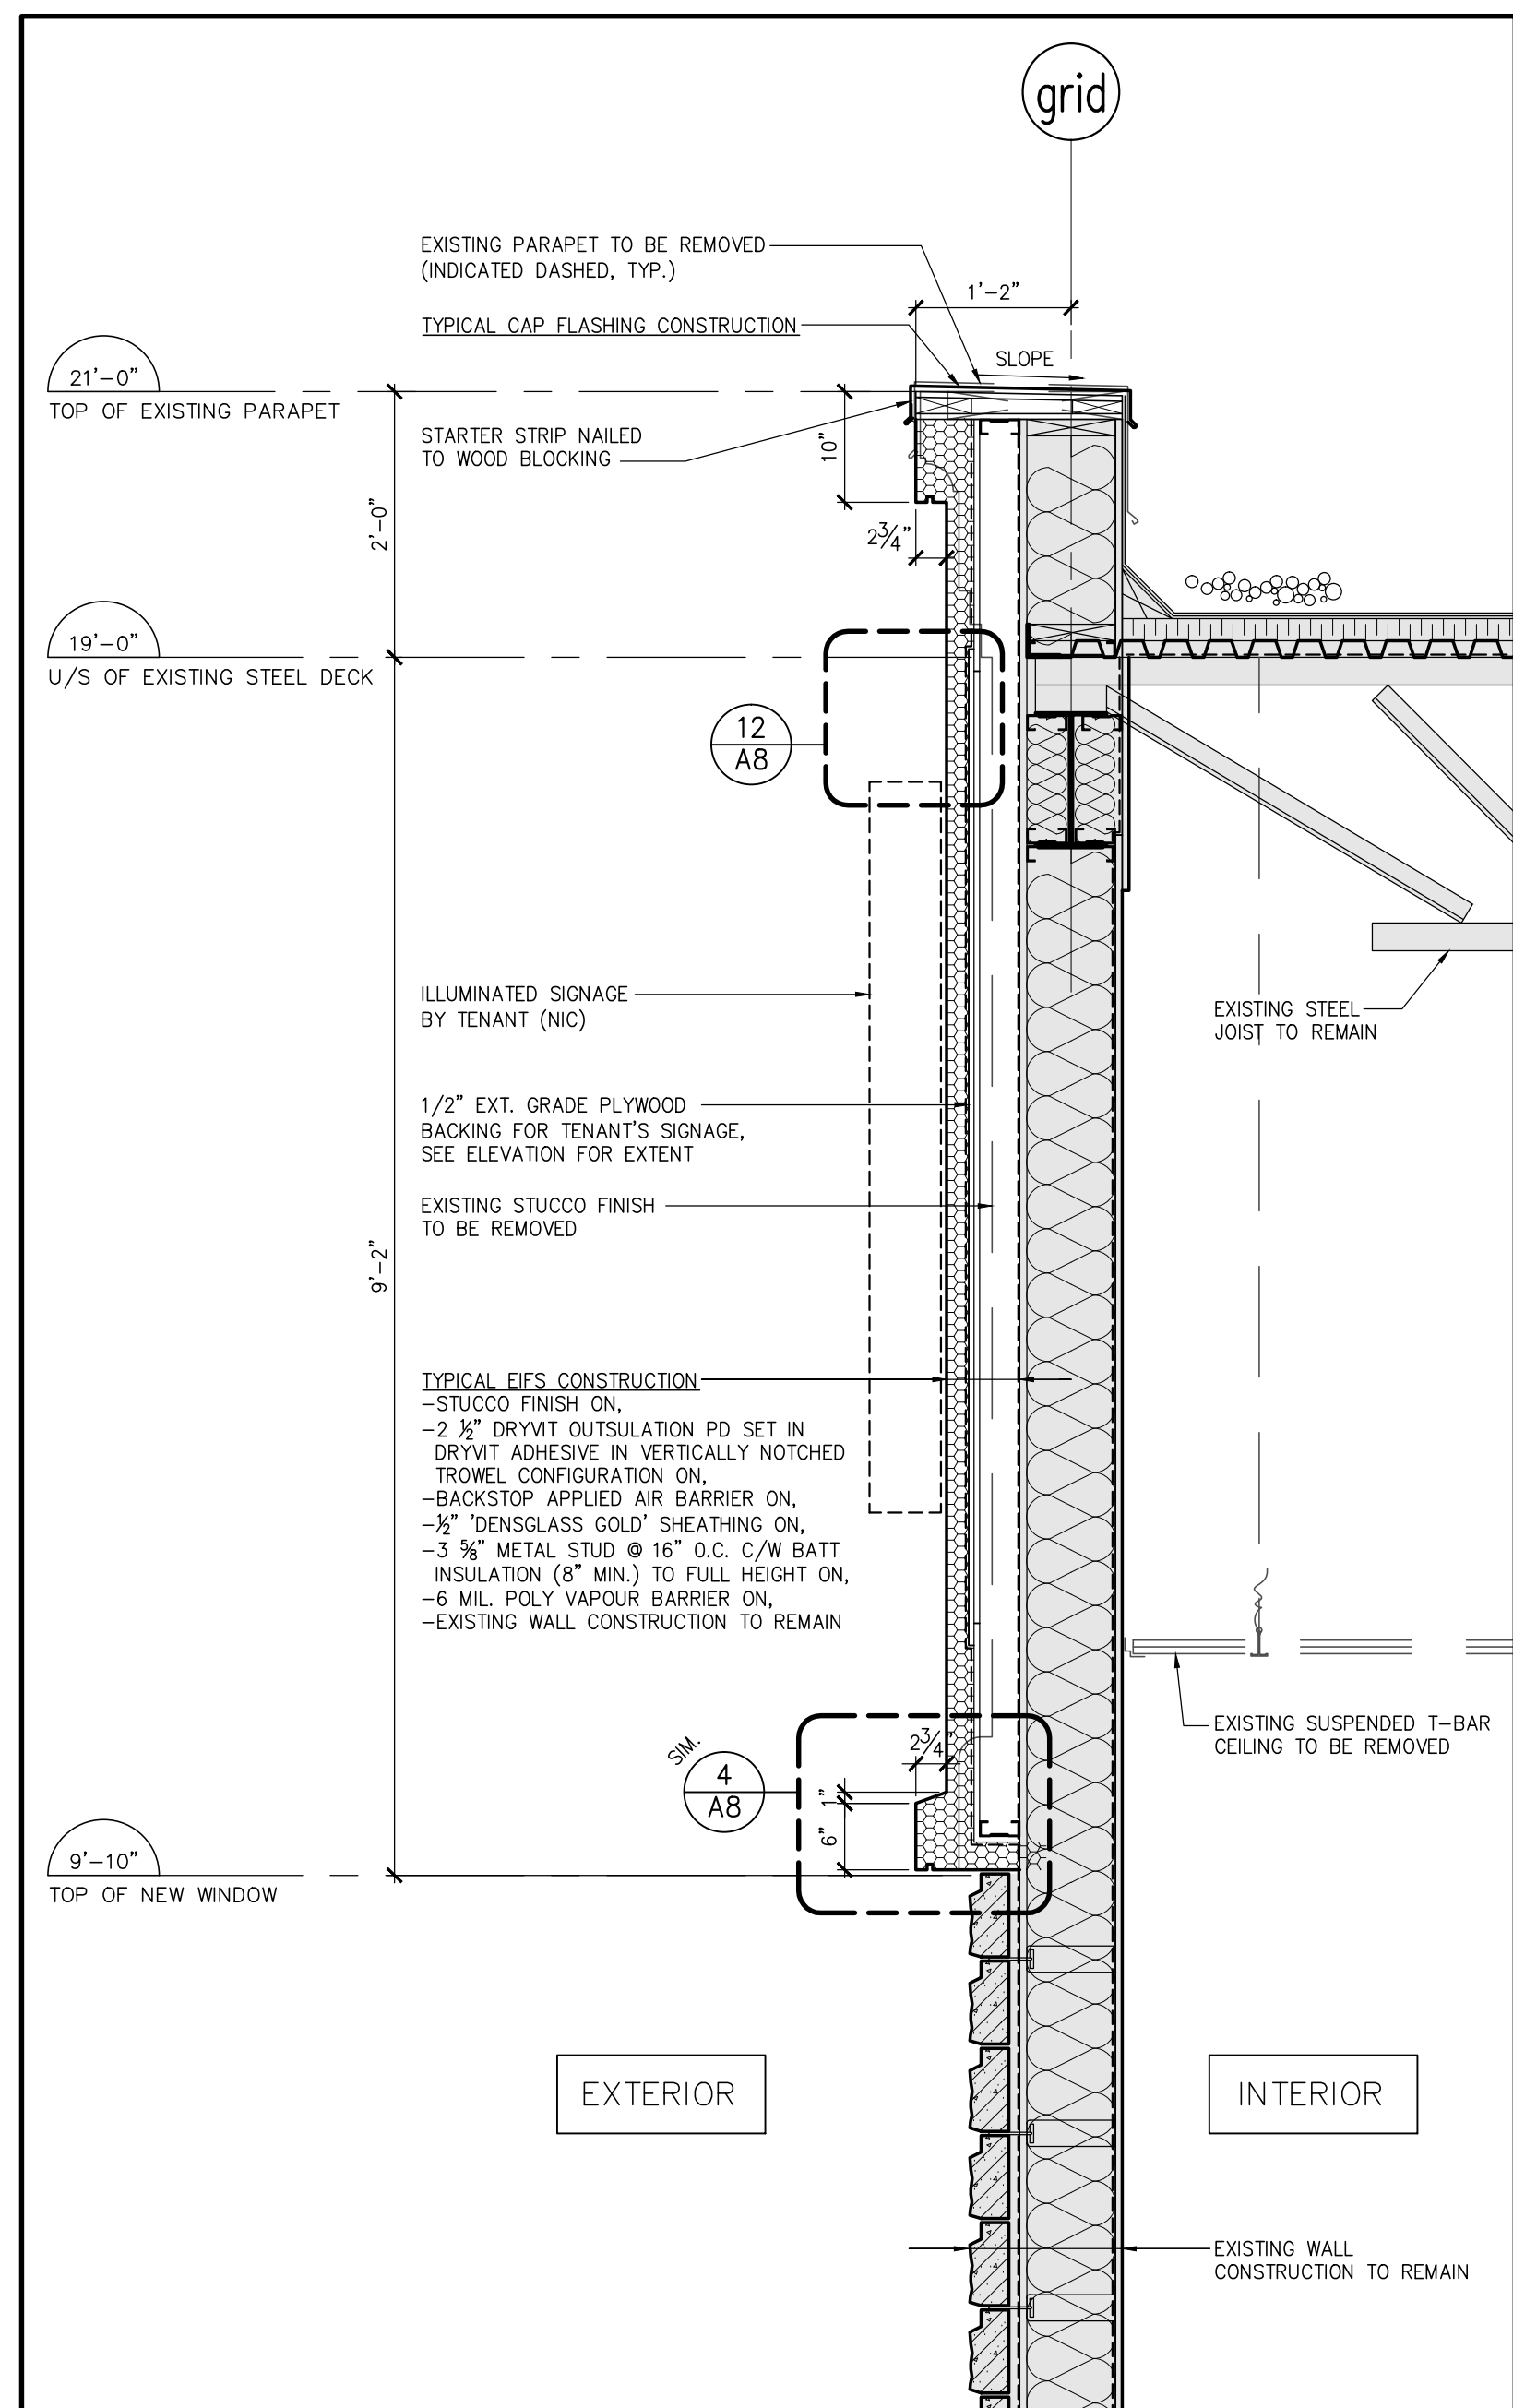

4 WALL SECTION
SCALE: 3/4" = 1'-0"

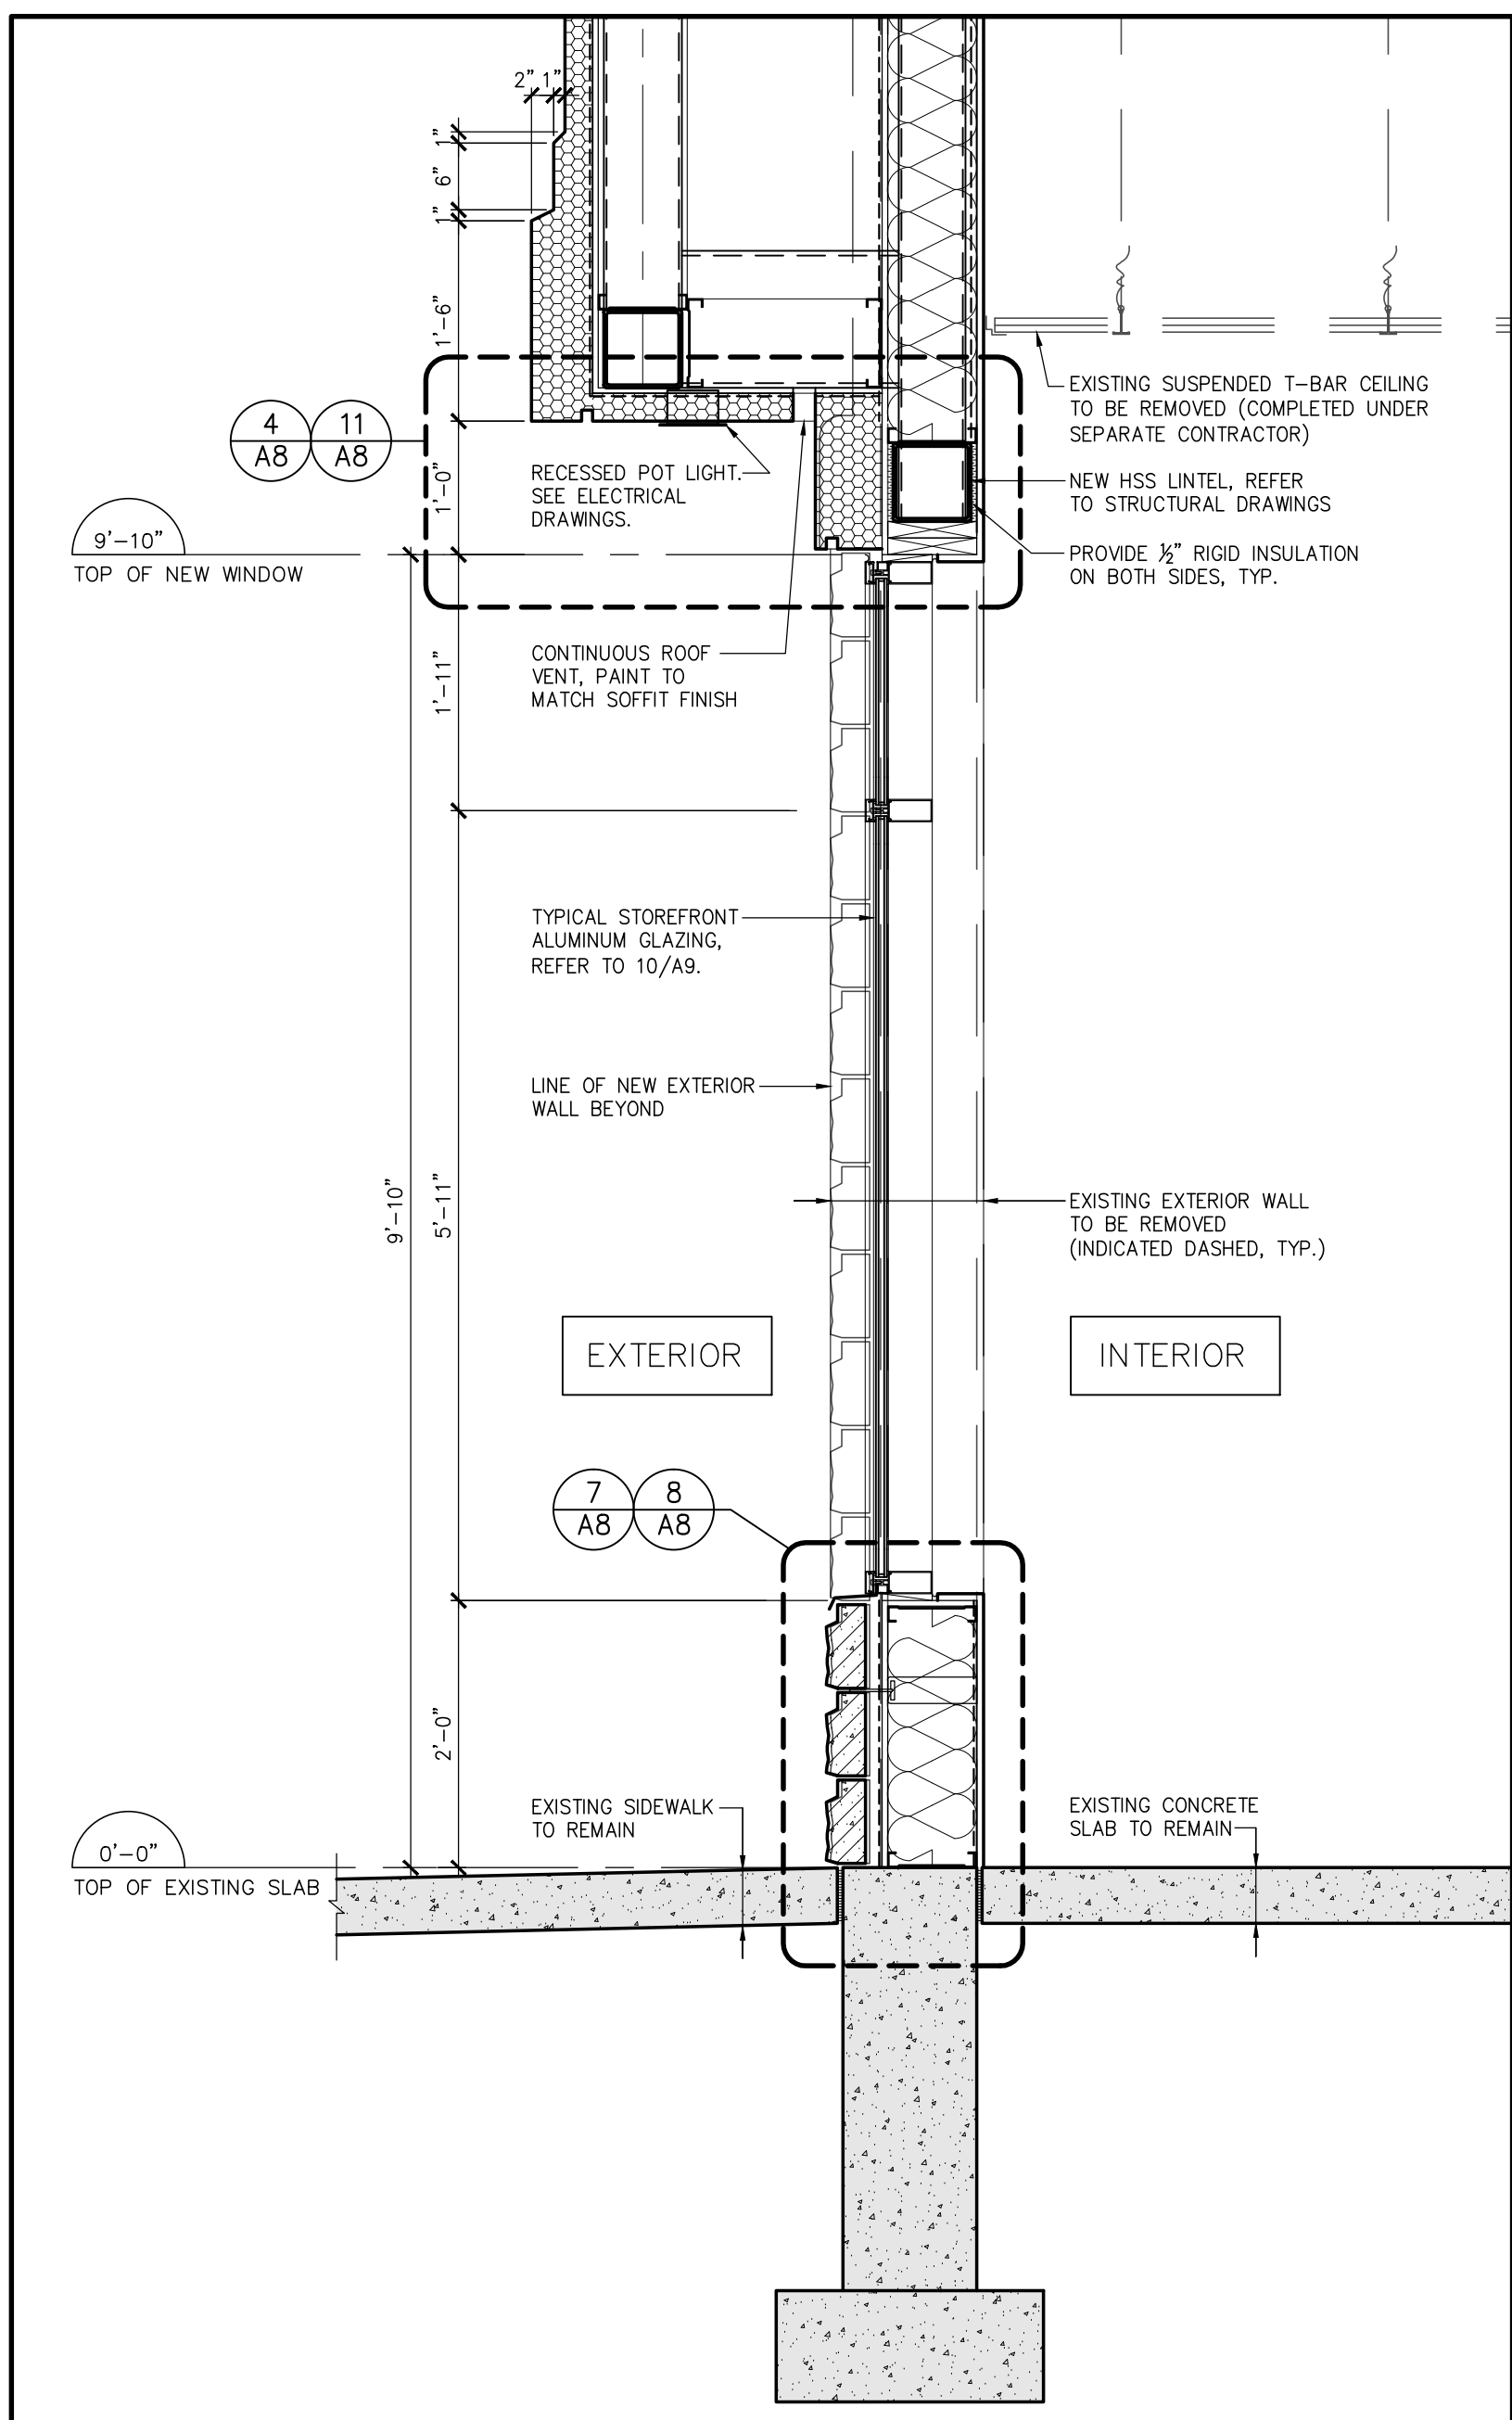

2 WALL SECTION
SCALE: 3/4" = 1'-0"

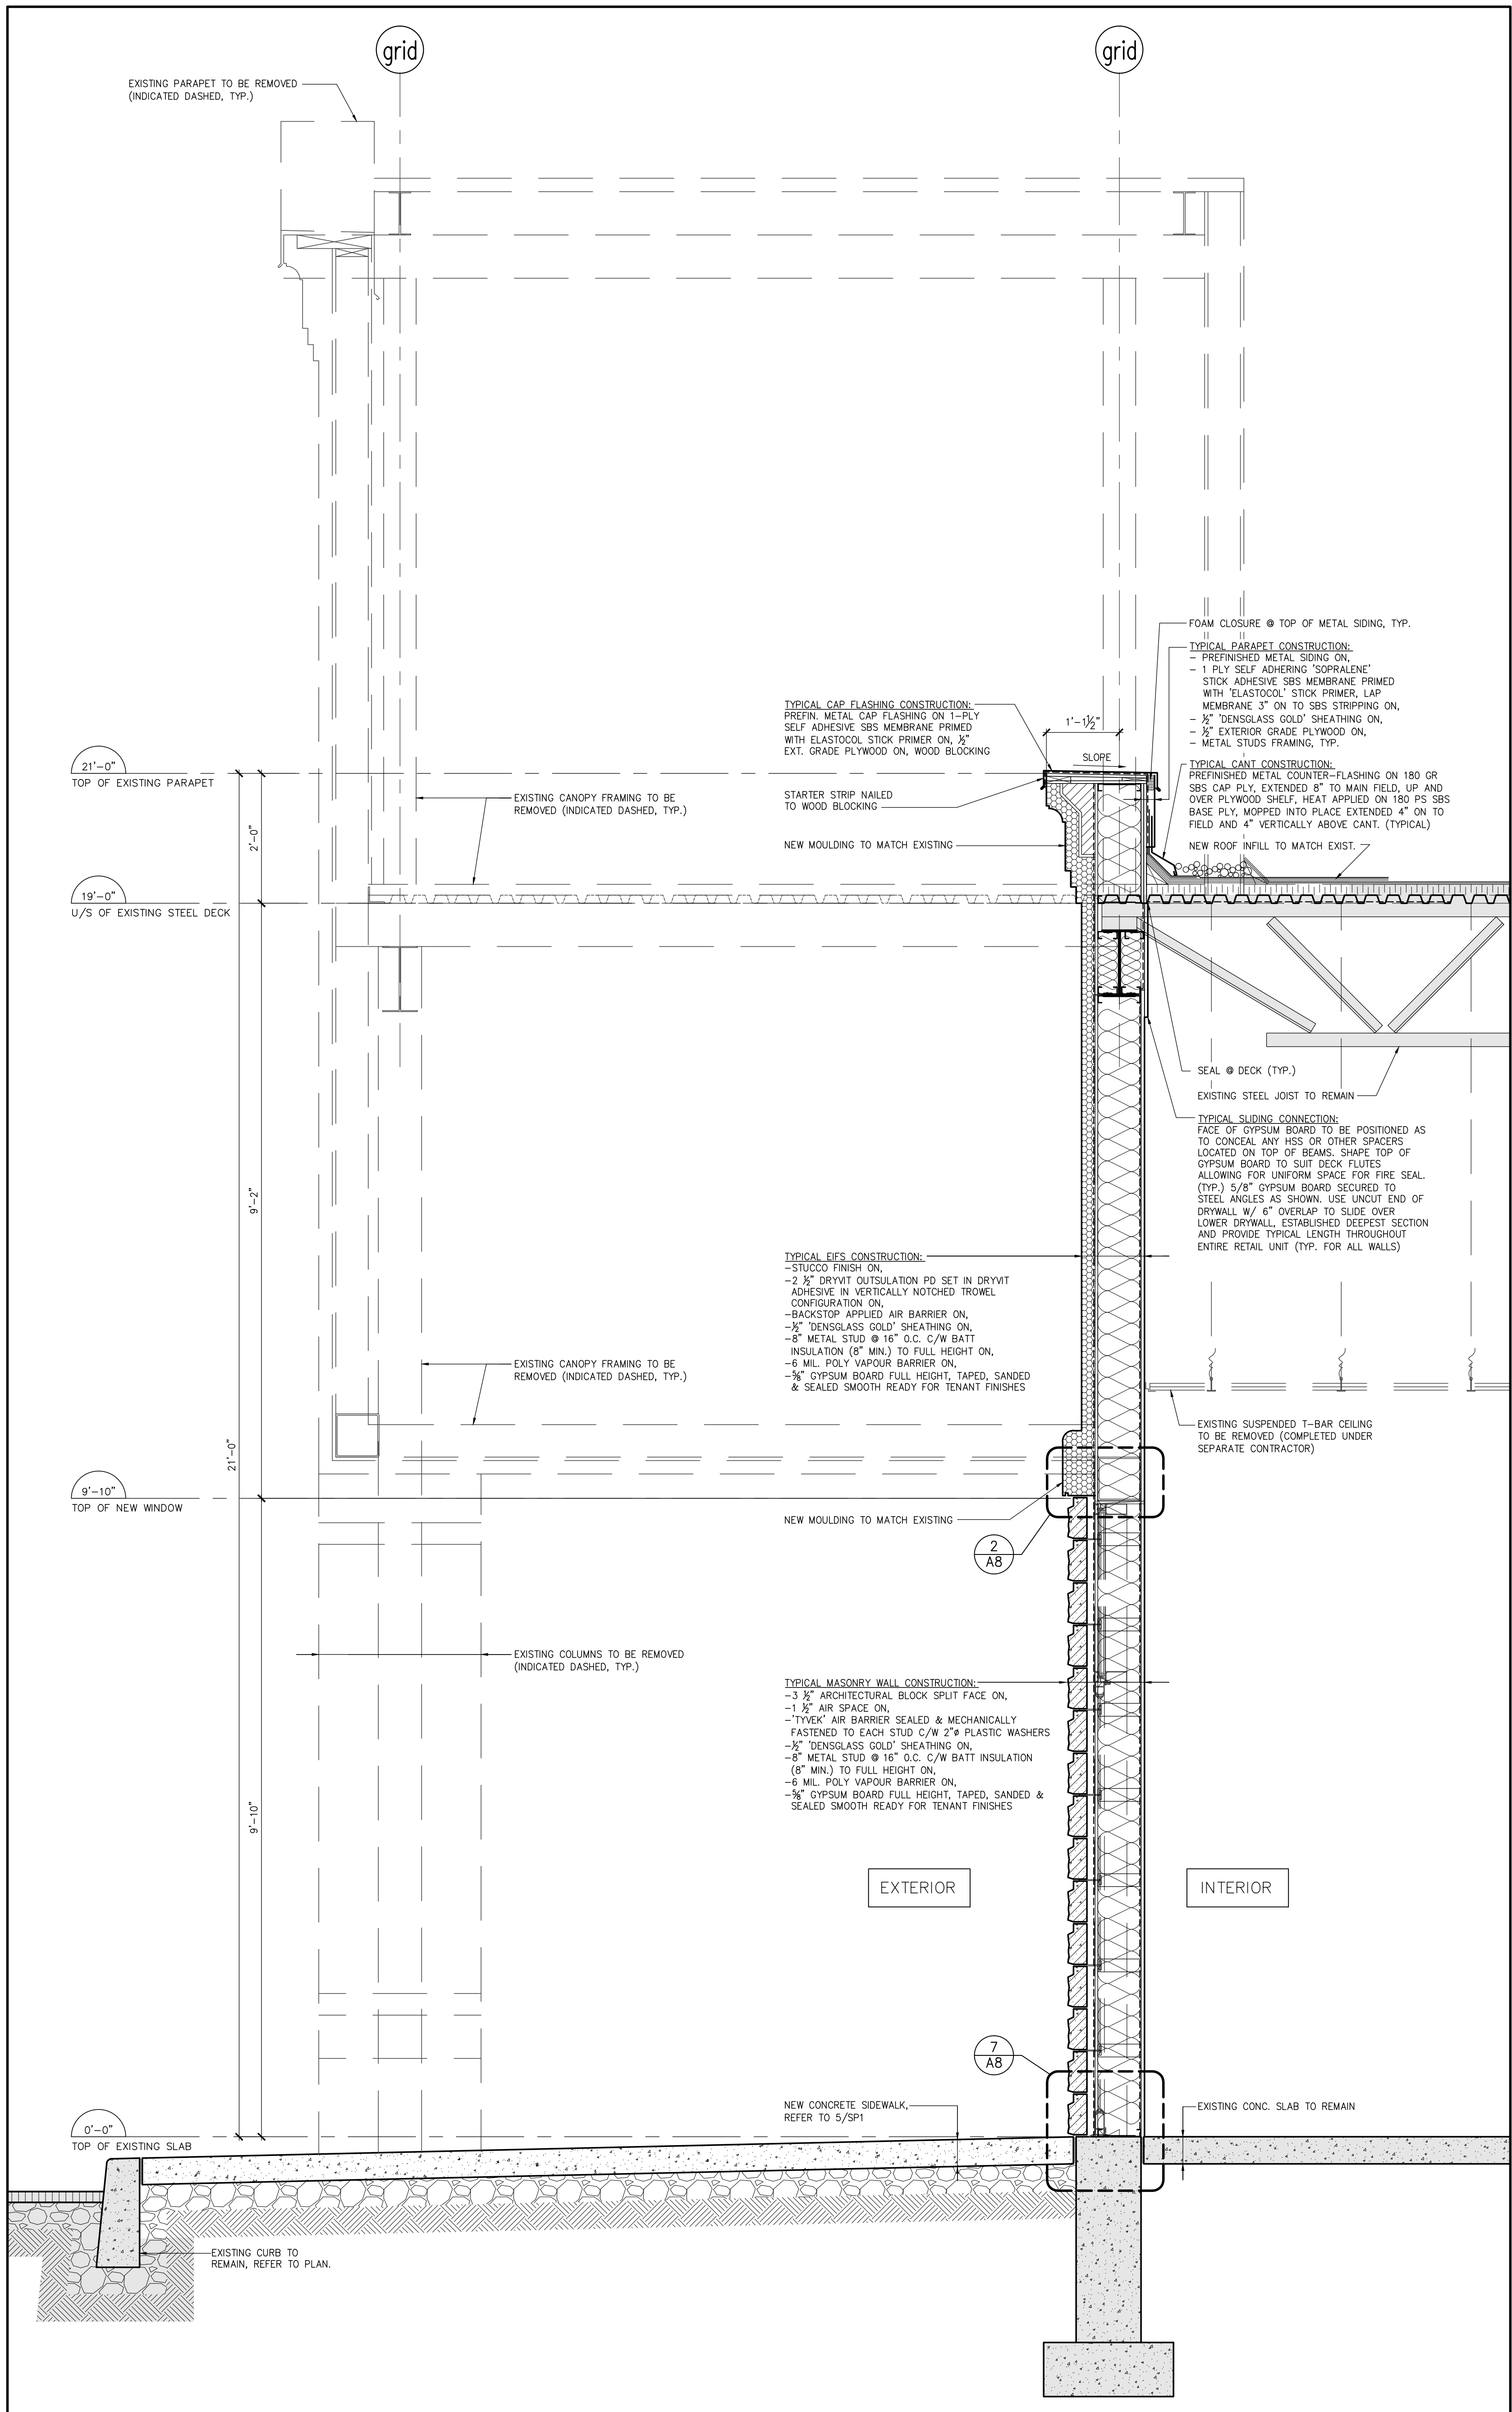

1 WALL SECTION
SCALE: 3/4" = 1'-0"

</			

CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS ON SITE. DO NOT SCALE DRAWINGS.

RIOCAN
MANAGEMENT INC.
RIOCAN YONGE EGLINTON CENTRE, 500-2300 YONGE STREET
P.O. Box 2386, TORONTO, ON, M4P 1E4


LEON LUBELSKI
ARCHITECTS INC.
1100 BAYVIEW AVE. SUITE 100
SCARBOROUGH, ONTARIO M1B 3Y1
416-291-1100

PROJECT: PROPOSED REDEMISE AT
RIOCAN CENTRE WINDSOR
BUILDING G1 (FORMER SEARS)
3051 LEGACY PARK DRIVE WINDSOR, ON


DRAWING TITLE: **WALL SECTIONS**

DRAWN BY	FC	COMM. NO.	19-33
CHECKED	AZ	DRAWING NO.	A7
SCALE			
DATE	JANUARY 2019		


WPS-002-2019




25 NOT USED
SCALE: NTS




20 NOT USED
SCALE: NTS




15 NOT USED
SCALE: NTS

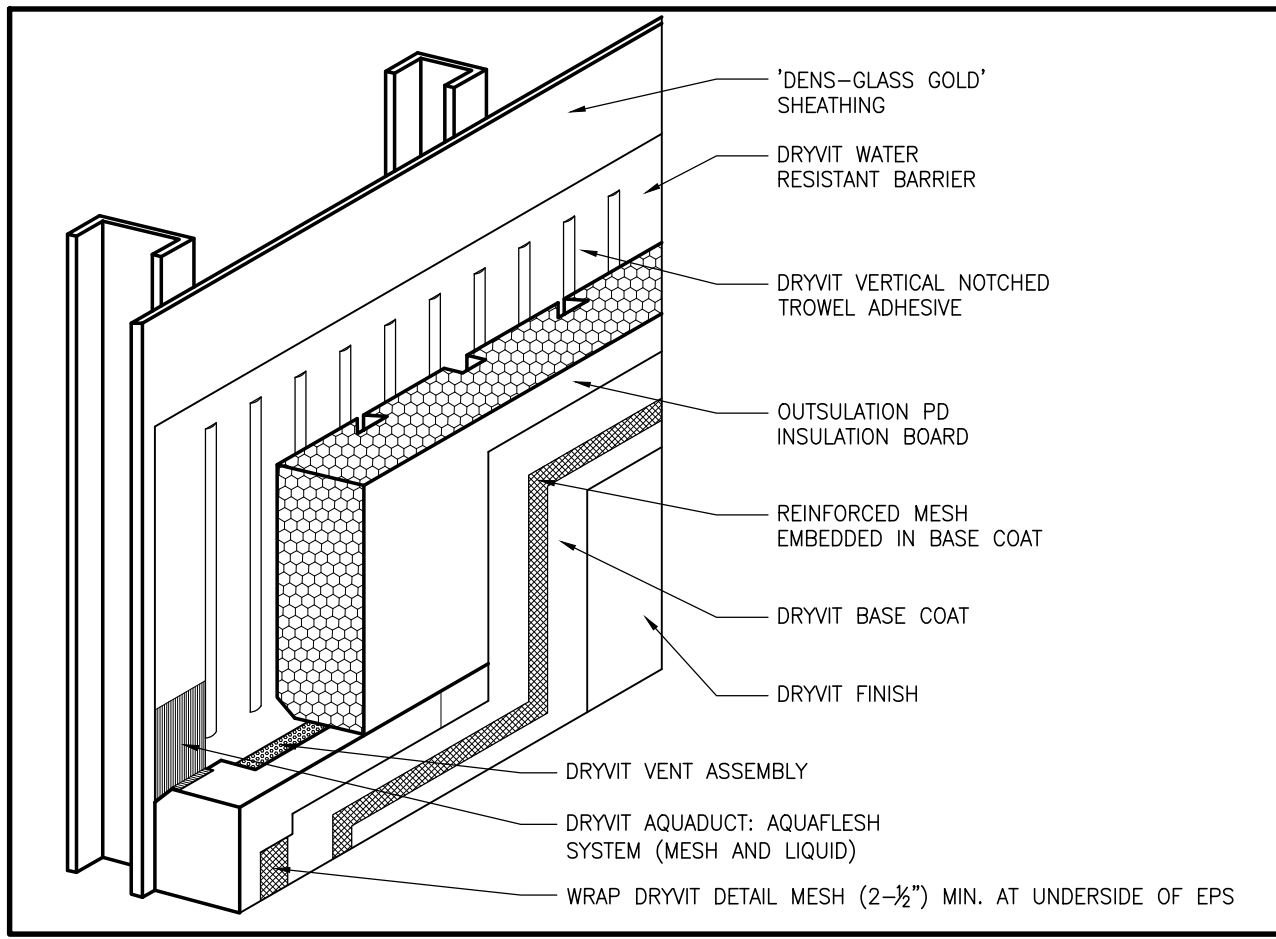


10 EIFS APPLICATION
SCALE: NTS

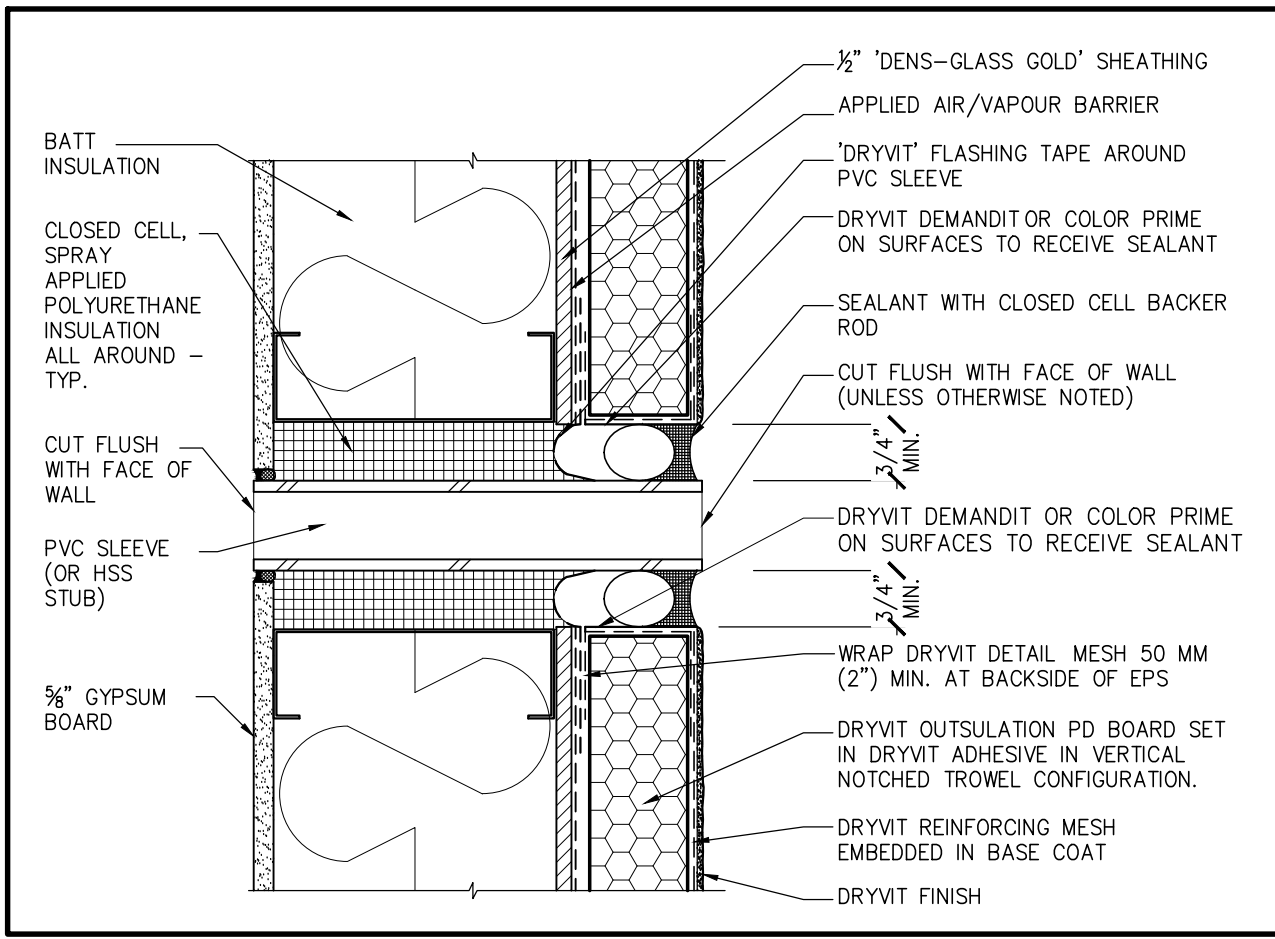


5 SLEEVE THROUGH EIFS DETAIL
SCALE: 2\"/>

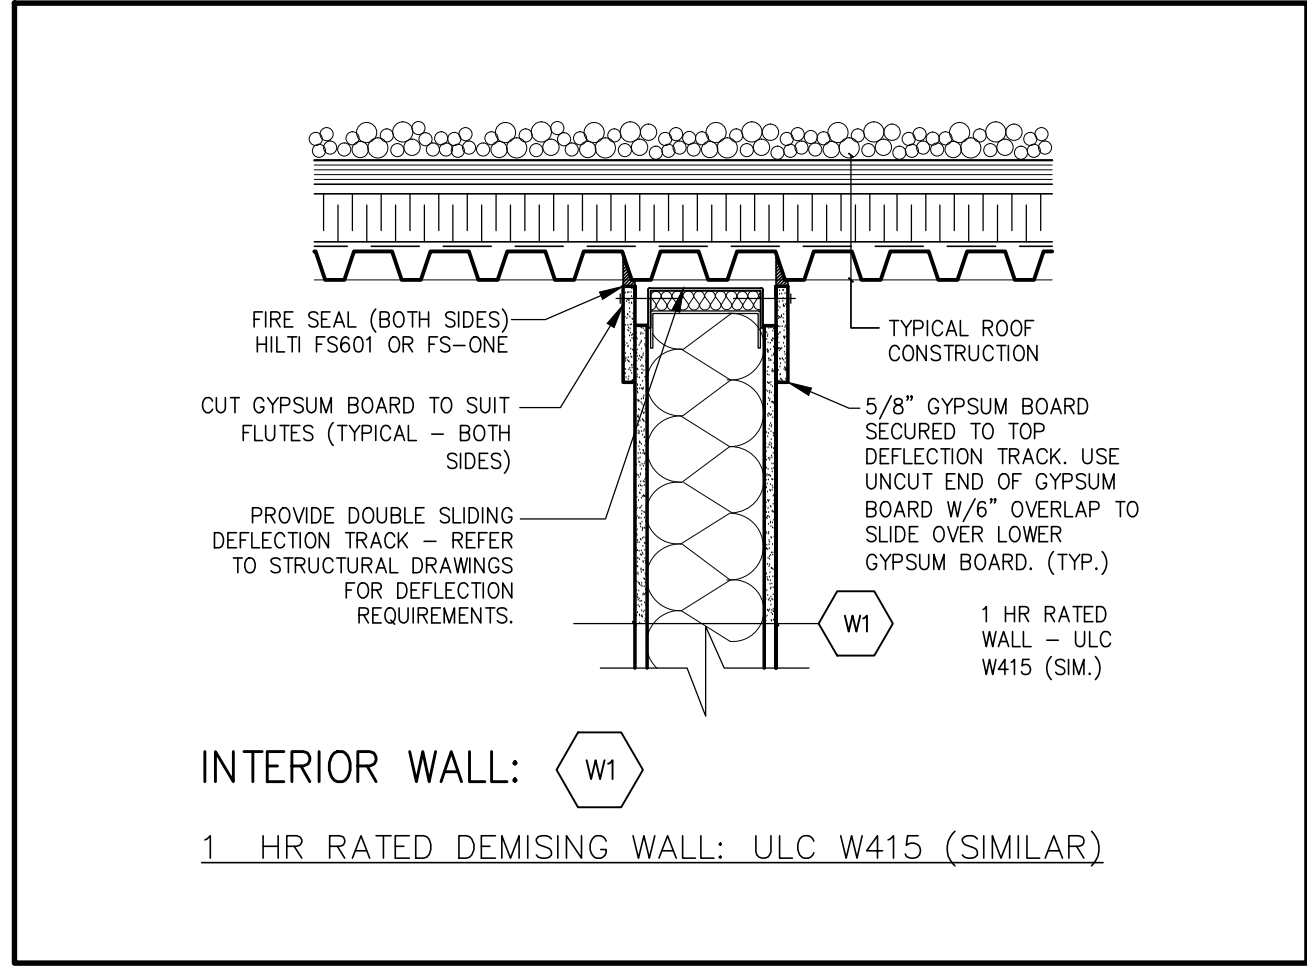


24 PLAN DETAIL
SCALE: 3\"/>

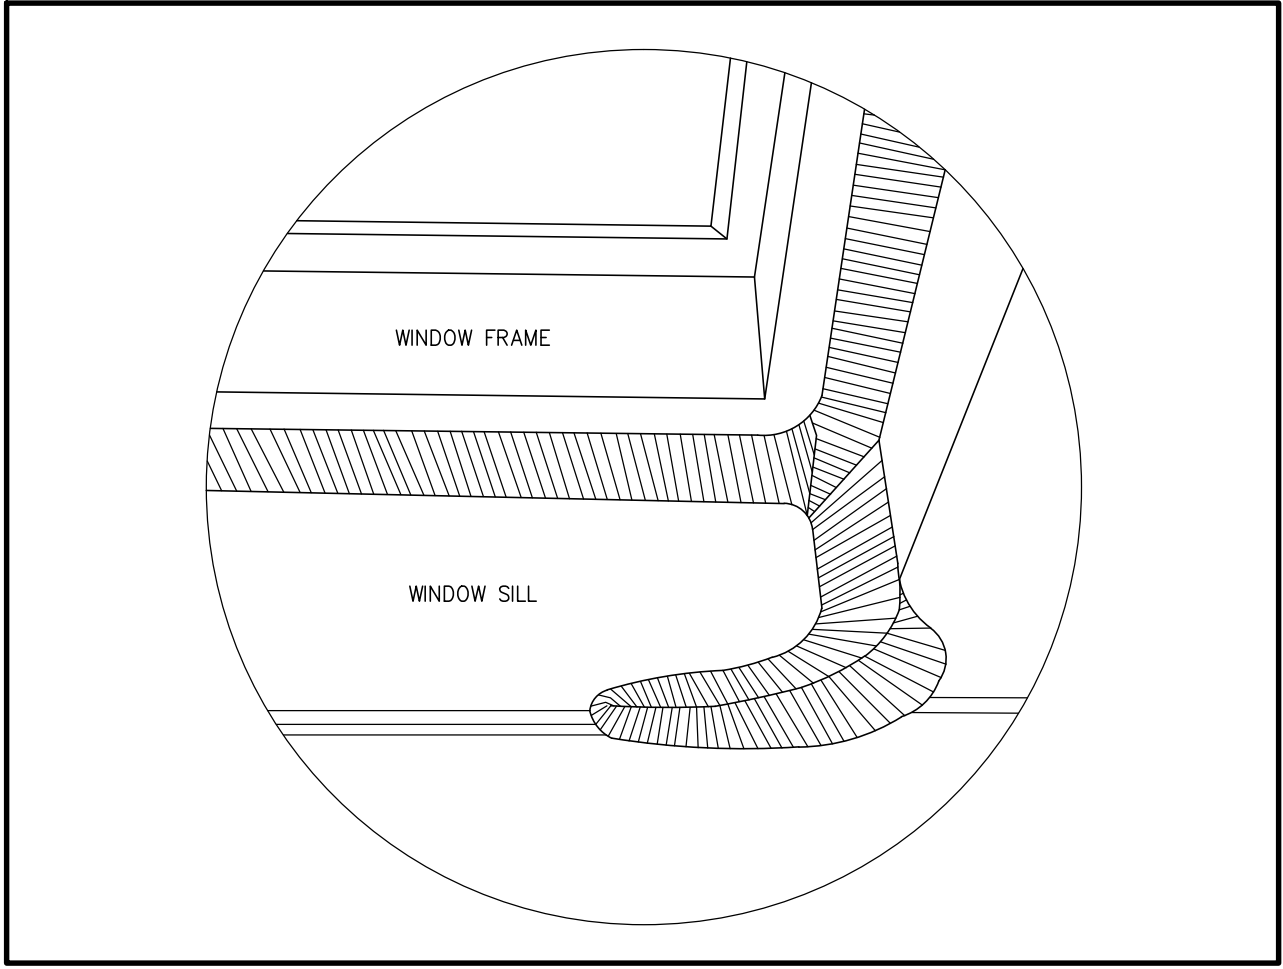


19 CAULKING DAM DETAIL
SCALE: NTS

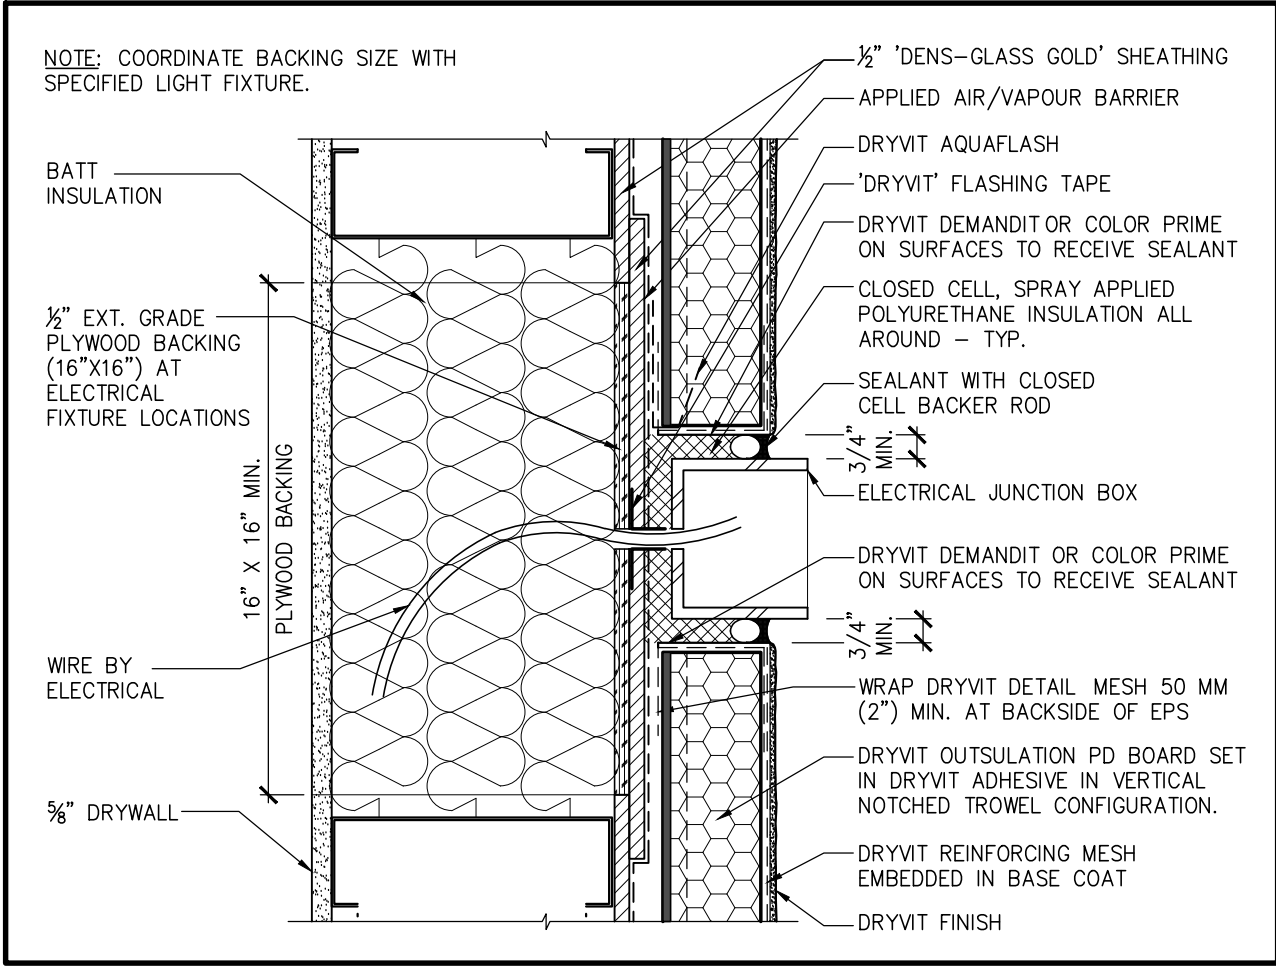


14 SECTION DETAIL
SCALE: 2\"/>

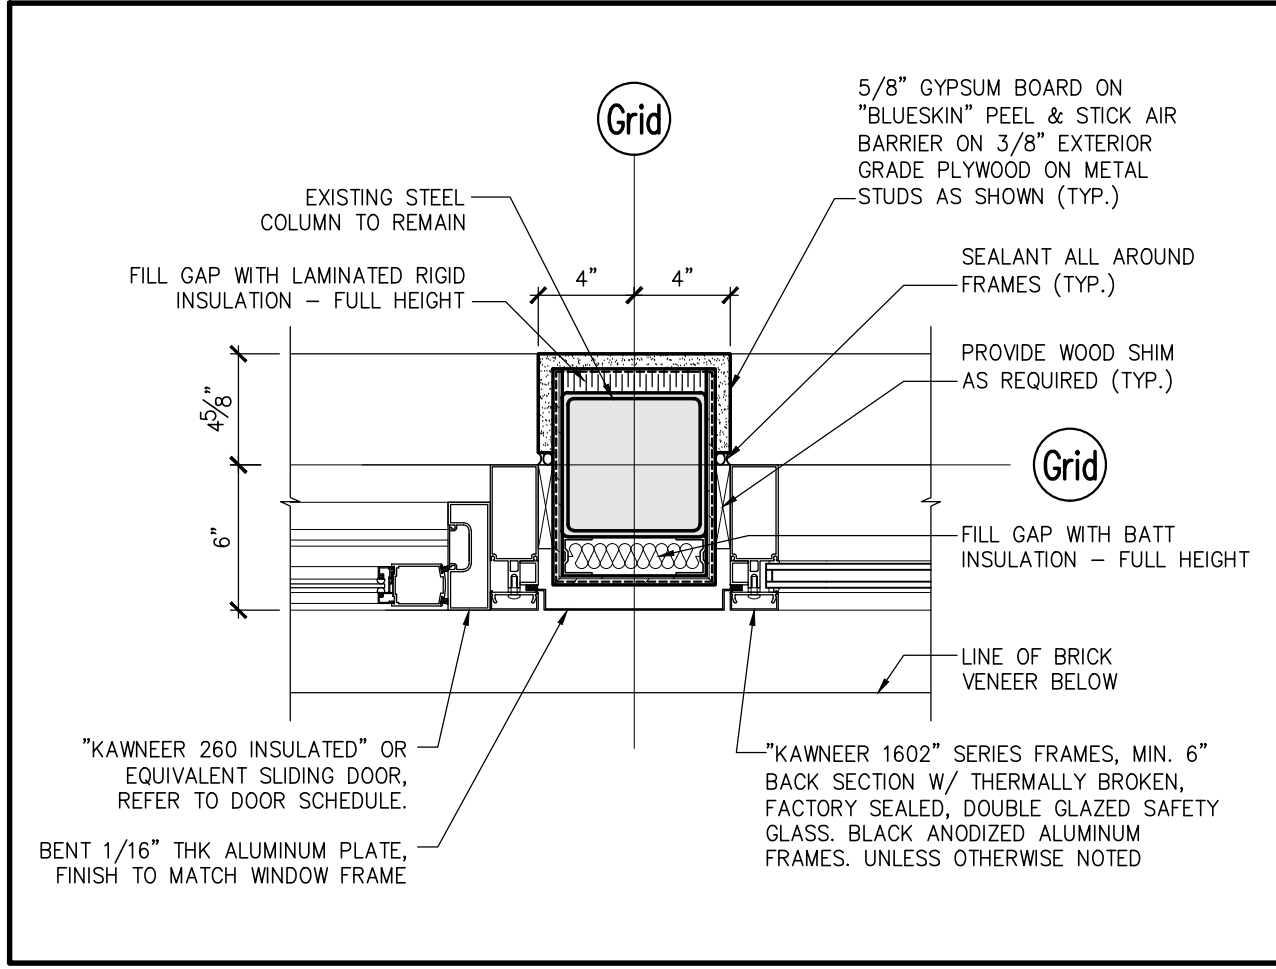


9 PLAN DETAIL
SCALE: 1 1/2\"/>

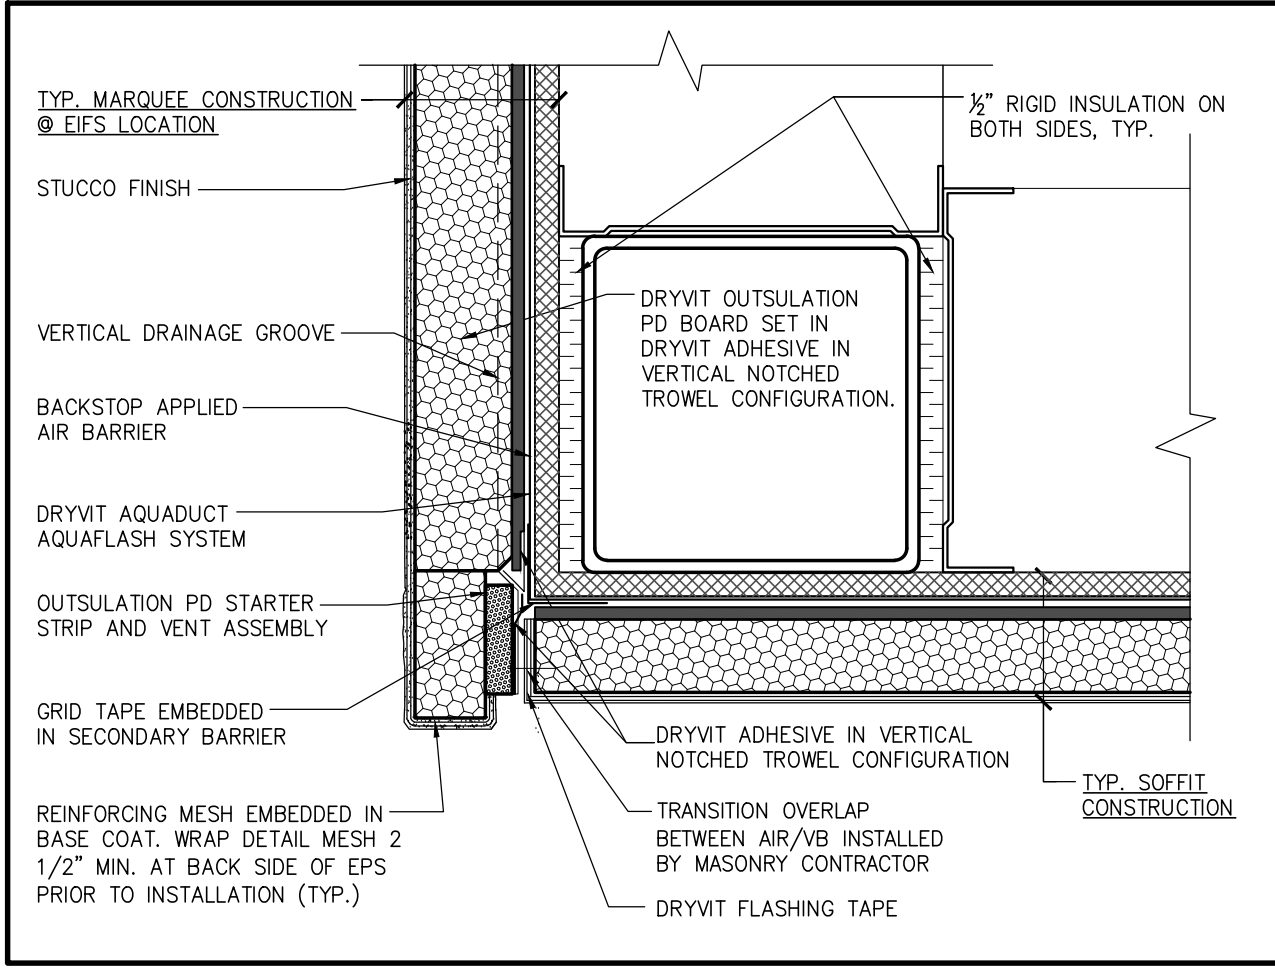


4 SECTION DETAIL
SCALE: 3\"/>

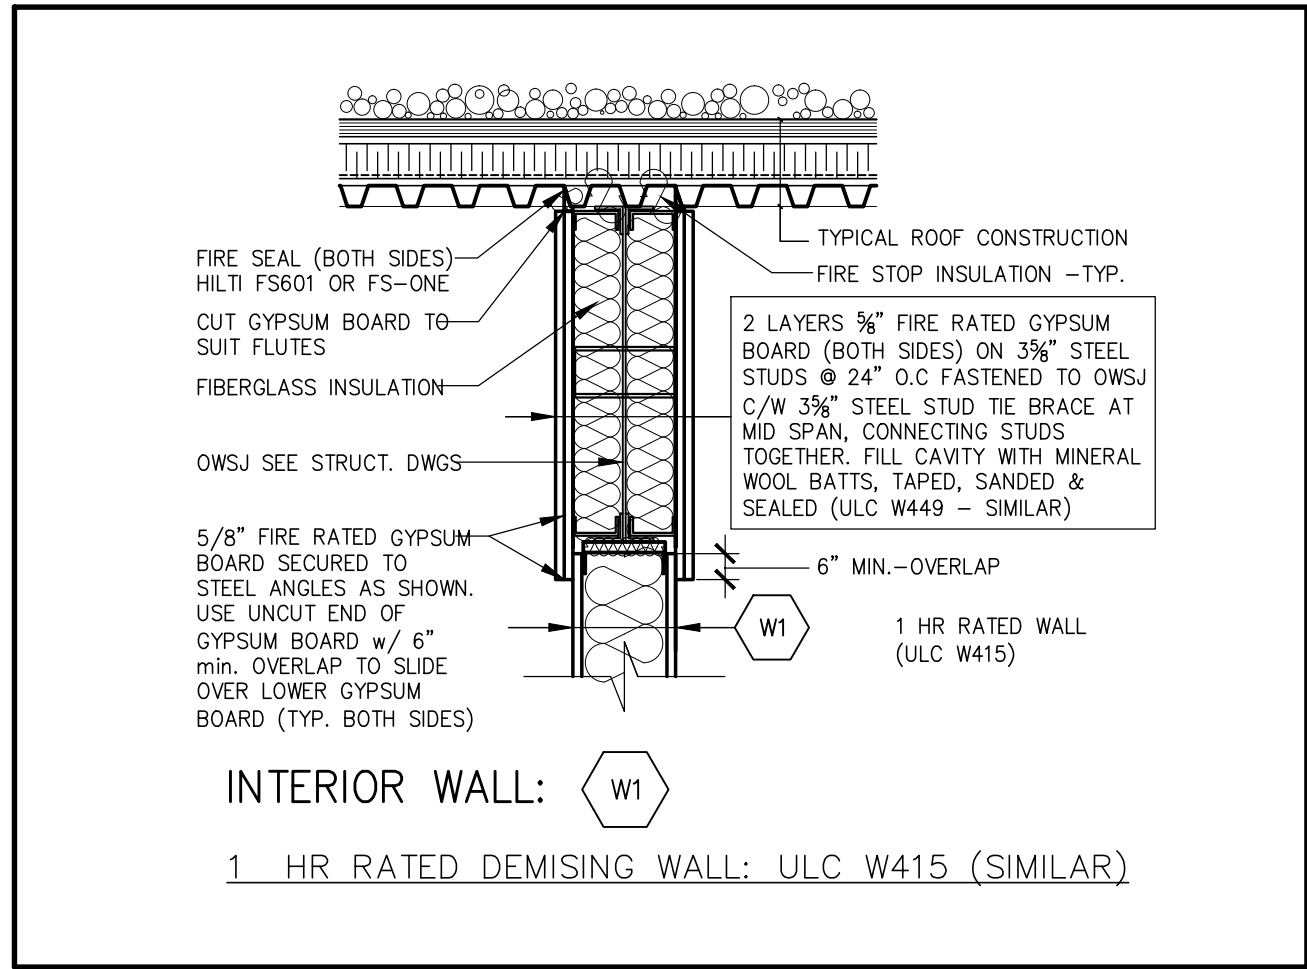


23 PLAN DETAIL
SCALE: 3\"/>

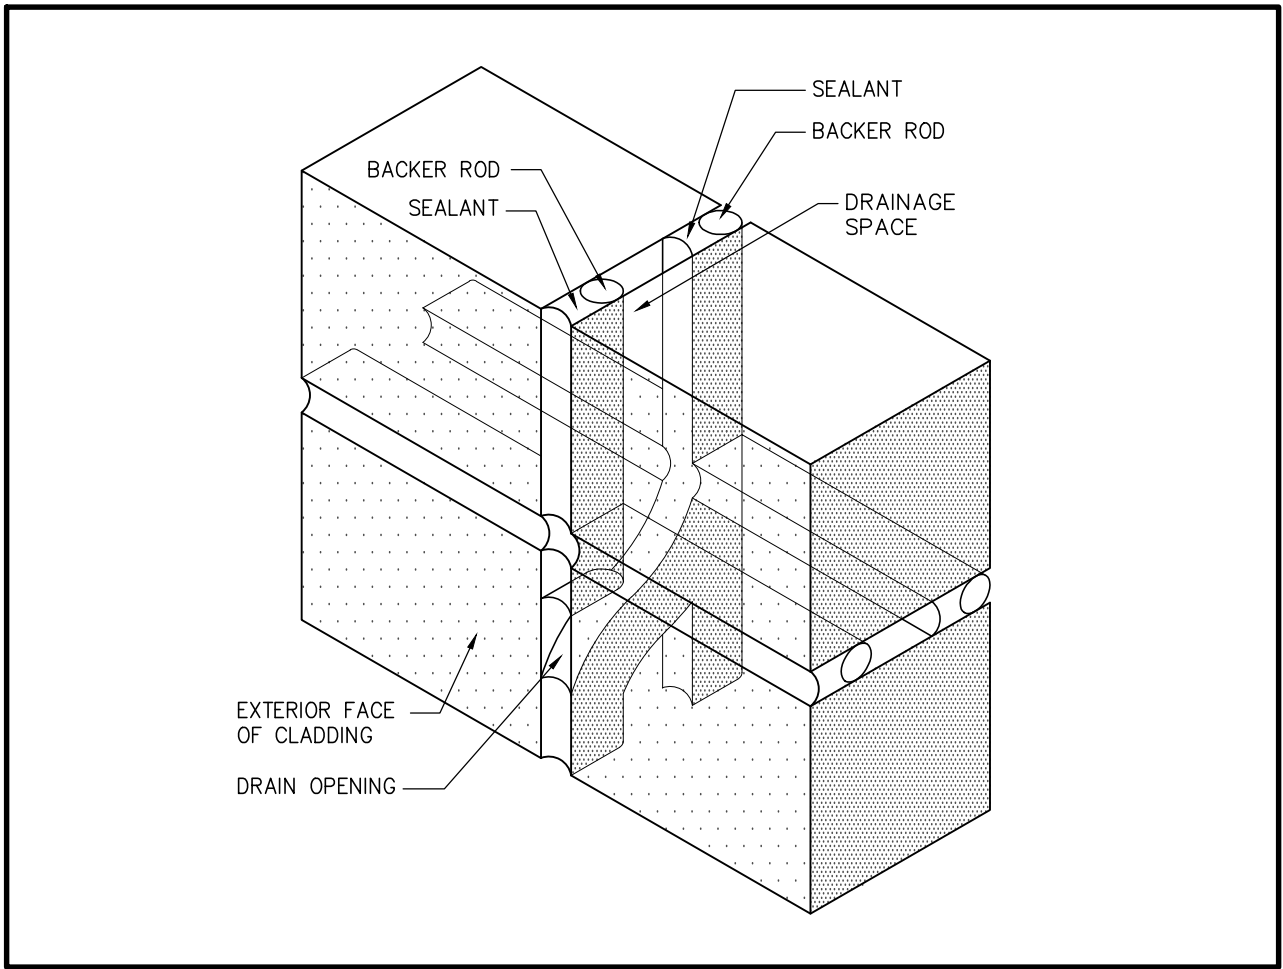


18 TWO-STAGE SEALANT JOINT
SCALE: NTS

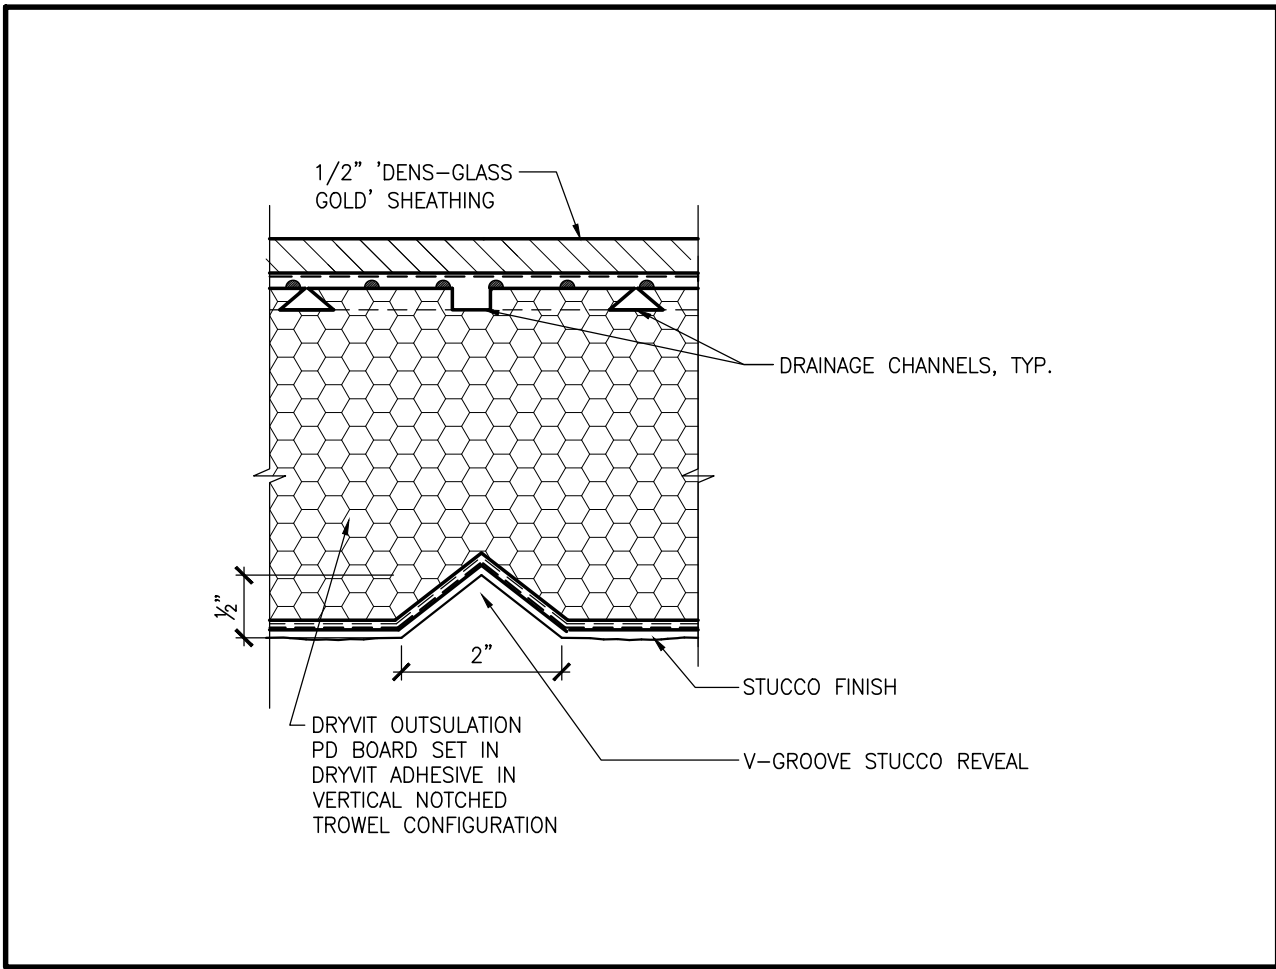


13 TYP. VERTICAL STUCCO REVEAL
SCALE: NTS

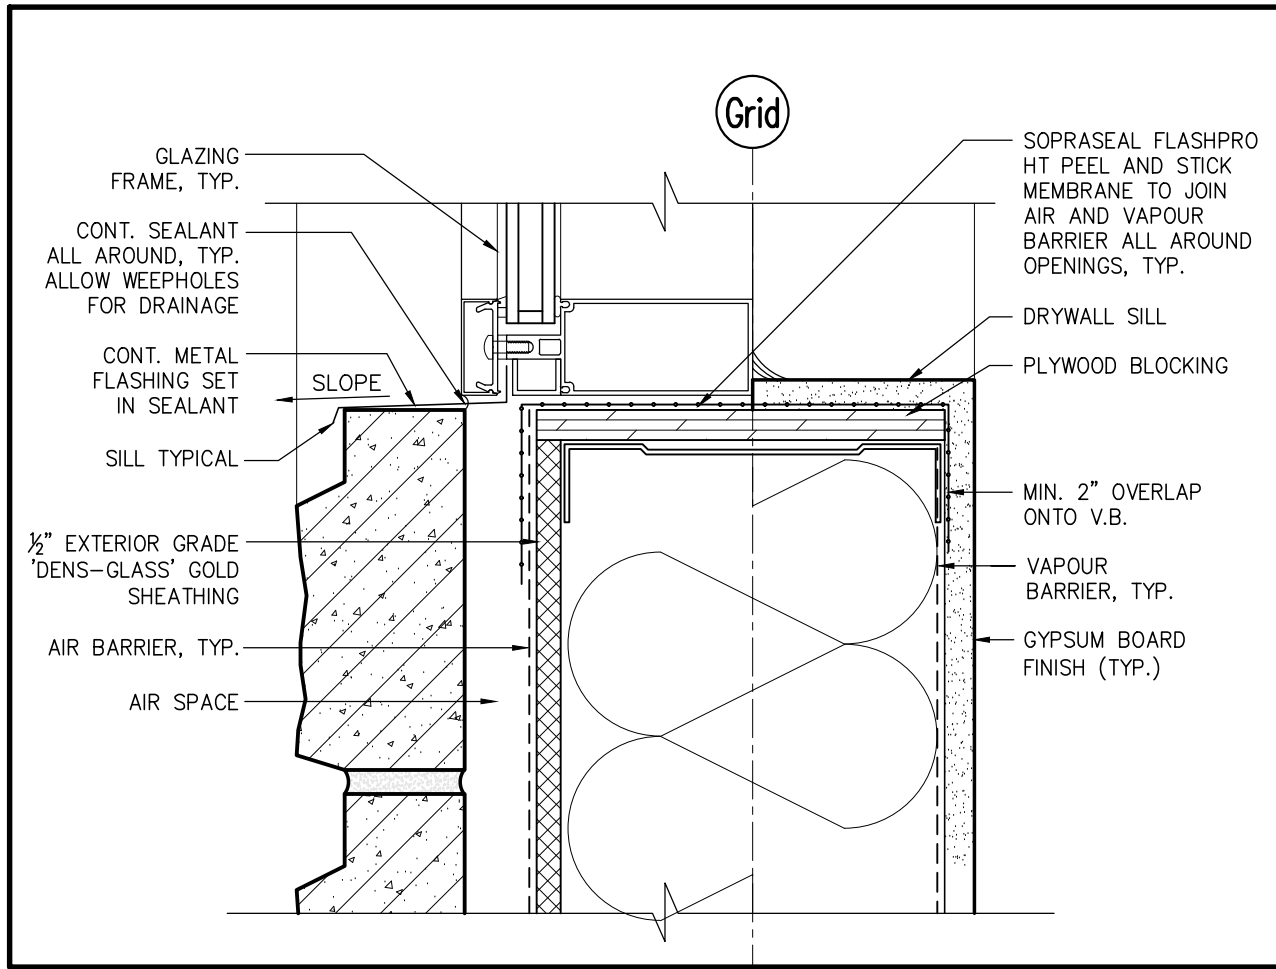


8 SECTION DETAIL
SCALE: 3\"/>

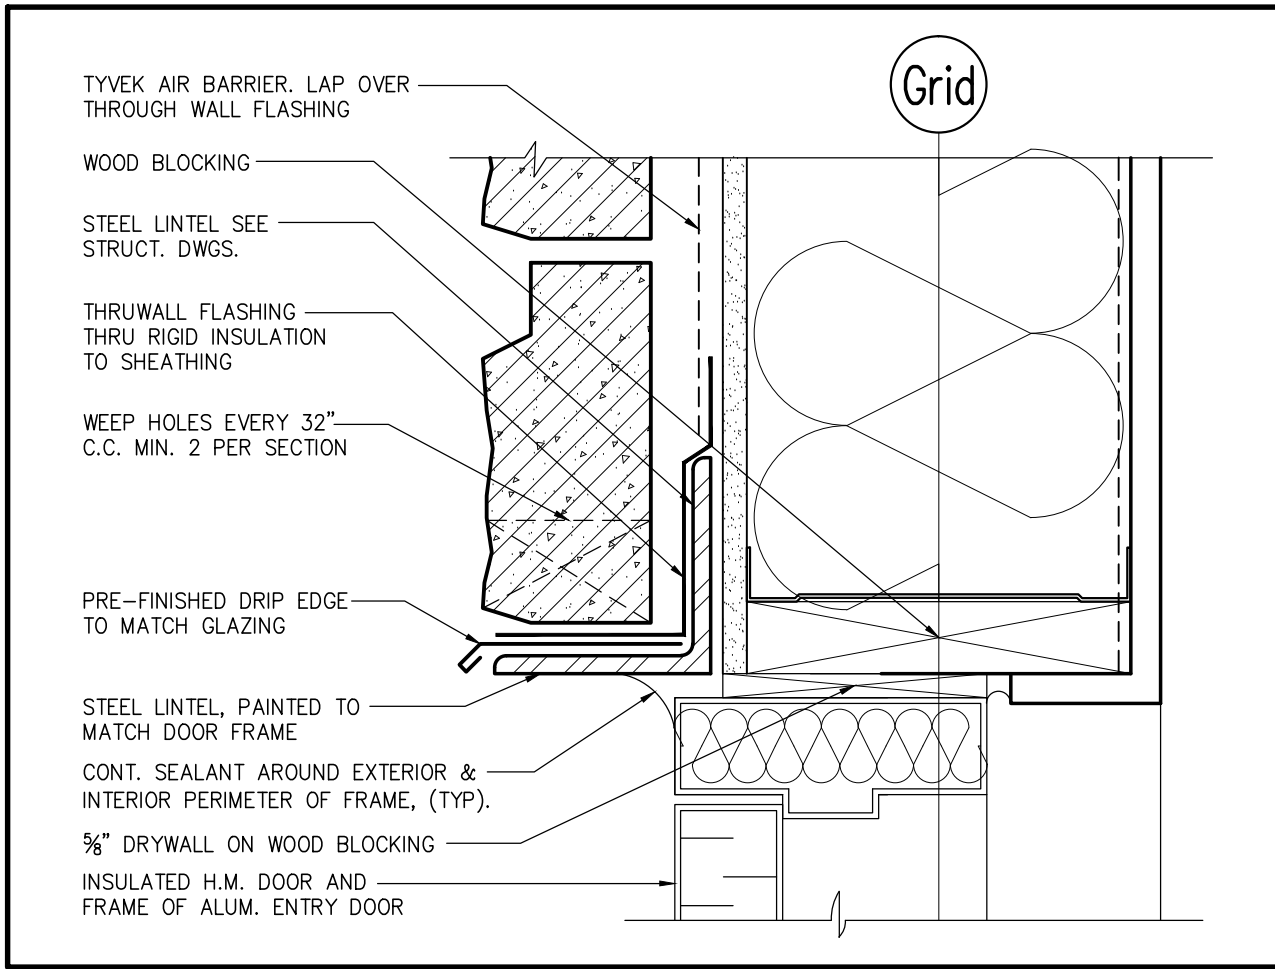


3 SECTION DETAIL
SCALE: 3\"/>

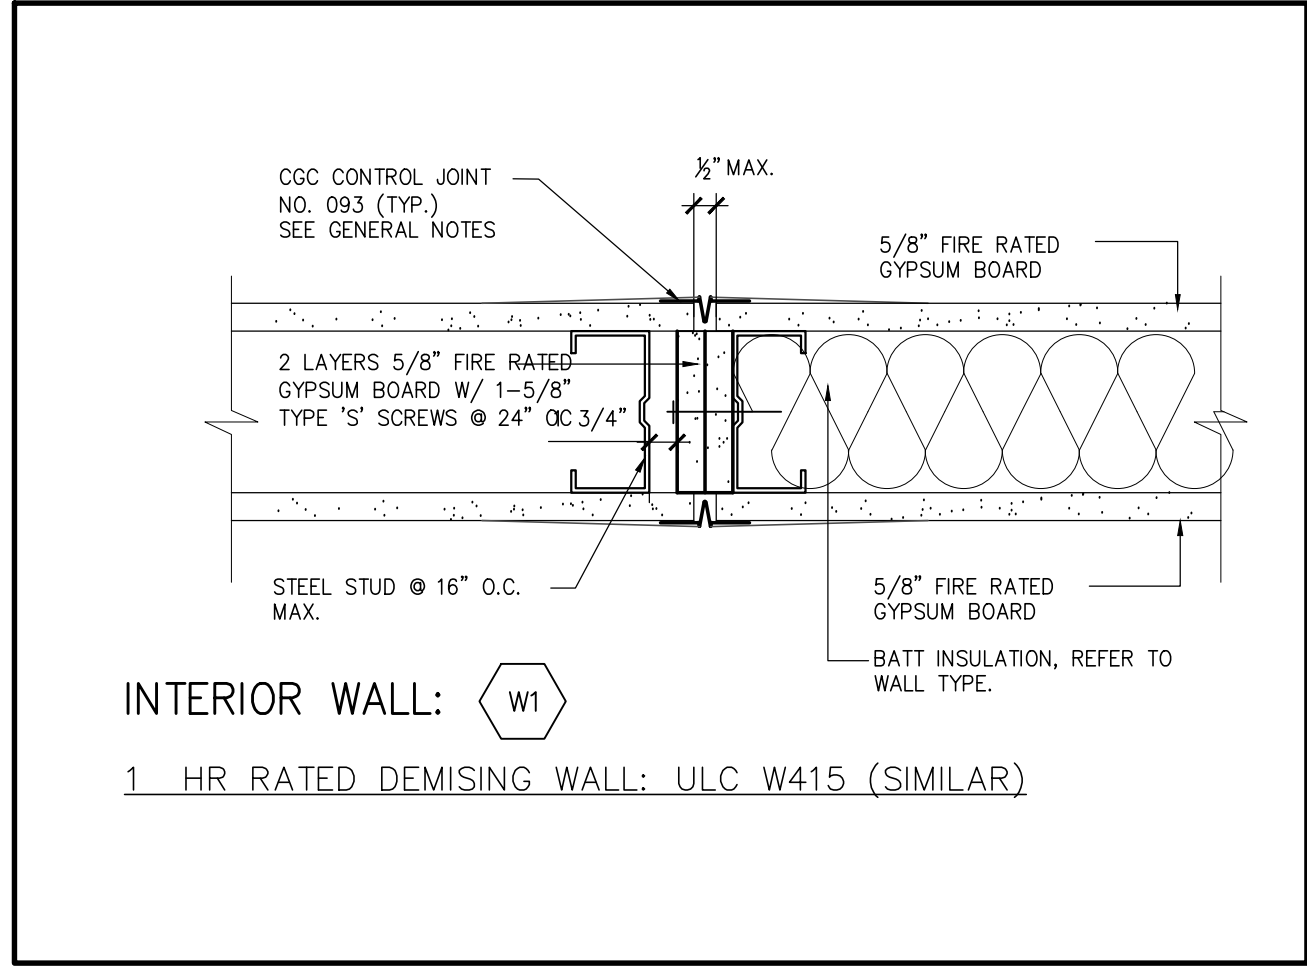


22 PLAN DETAIL
SCALE: 3\"/>

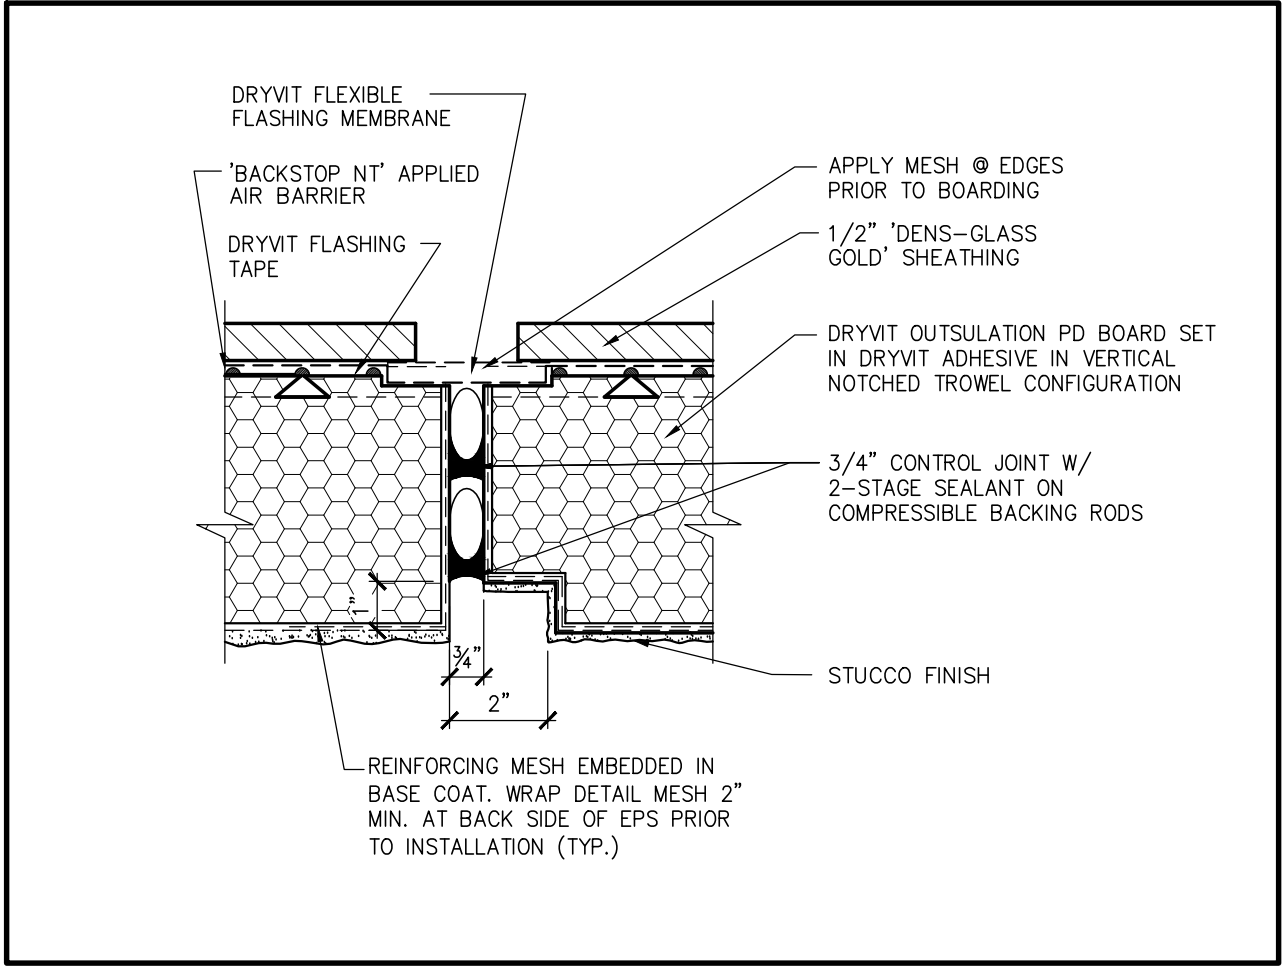


17 TYP. VERTICAL CONTROL JOINT
SCALE: 3\"/>

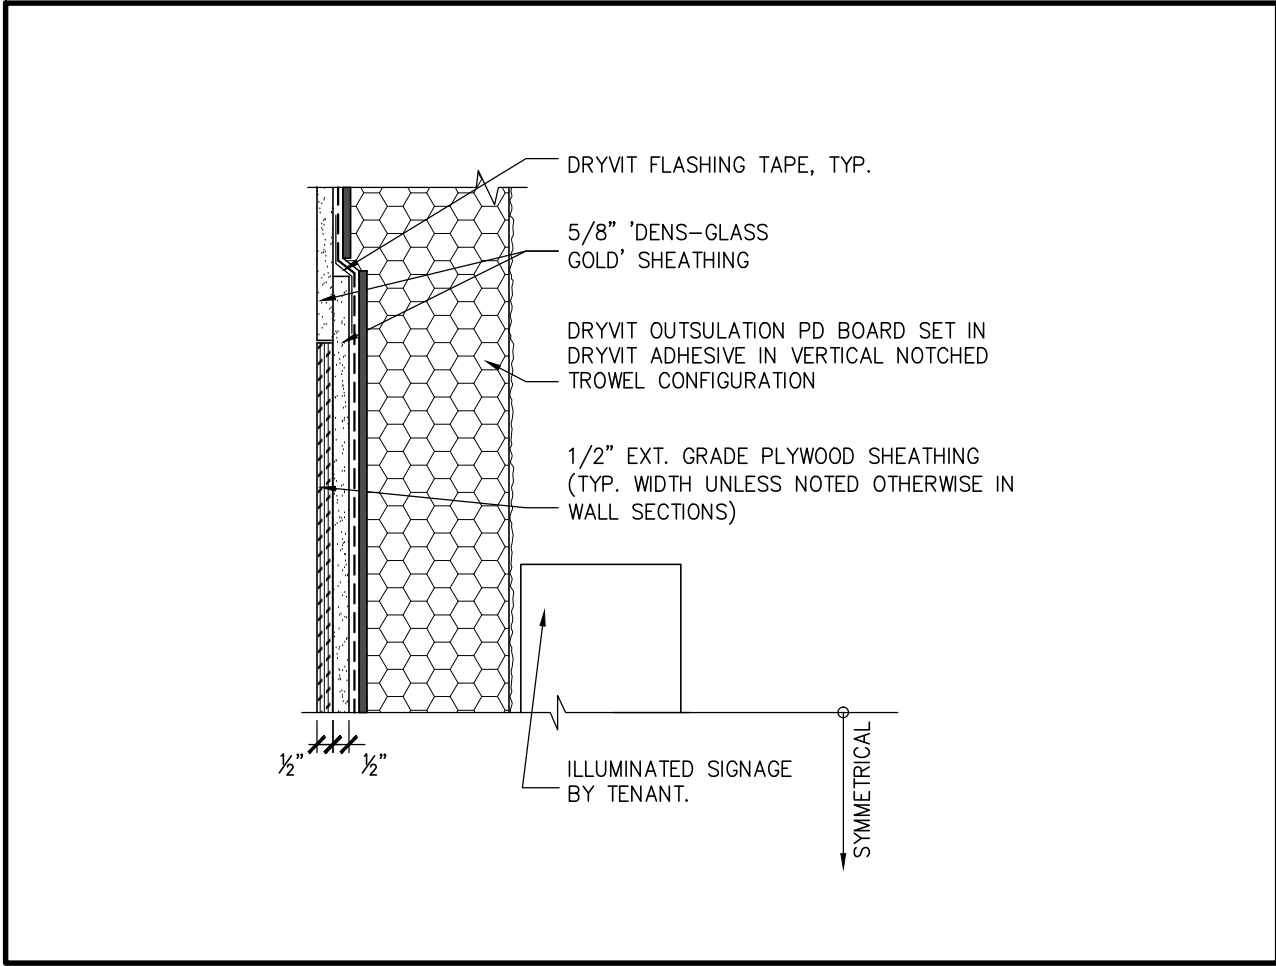


12 SECTION DETAIL
SCALE: 6\"/>

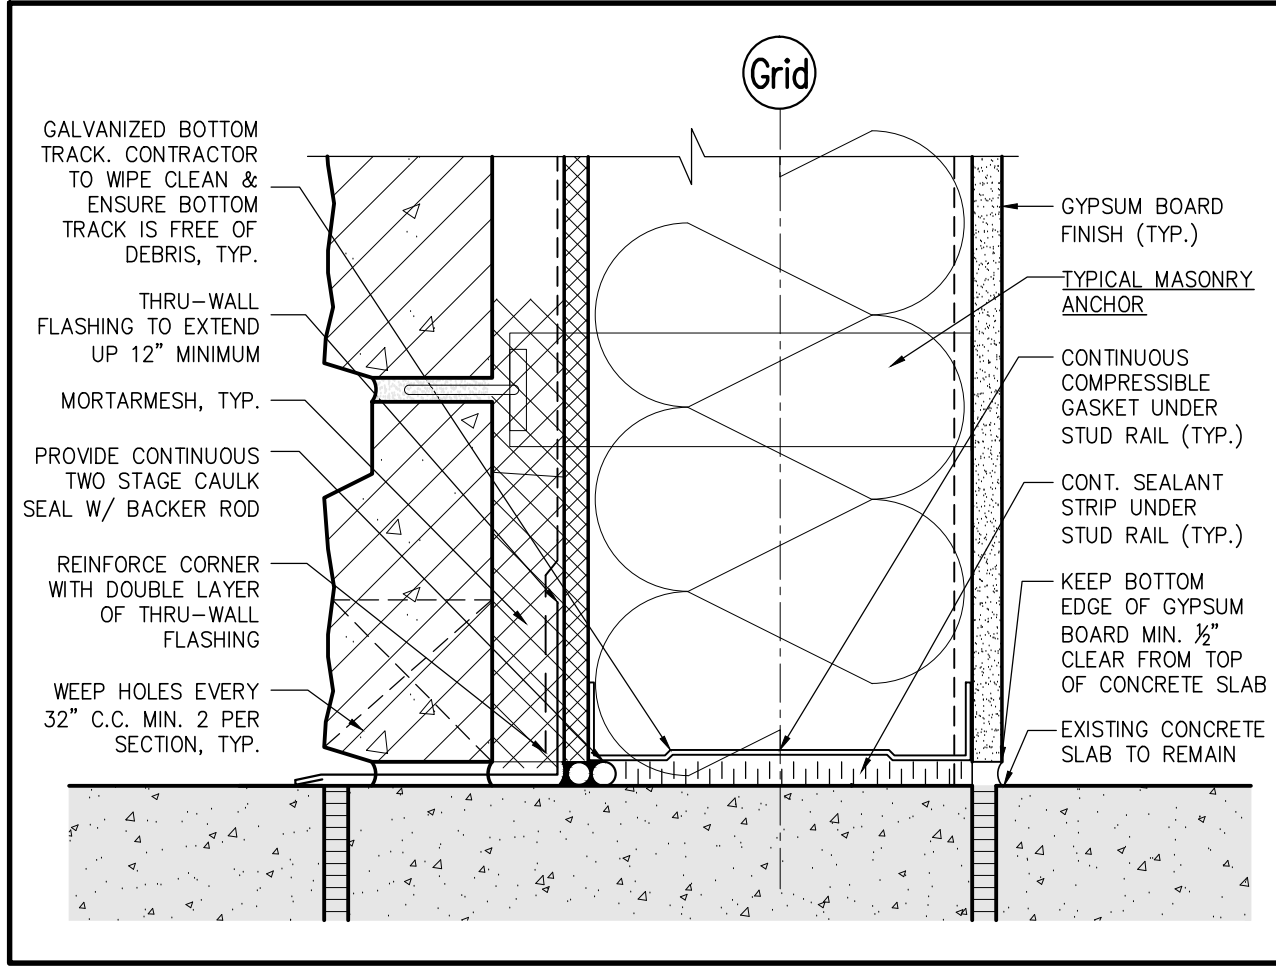


7 SECTION DETAIL
SCALE: 3\"/>

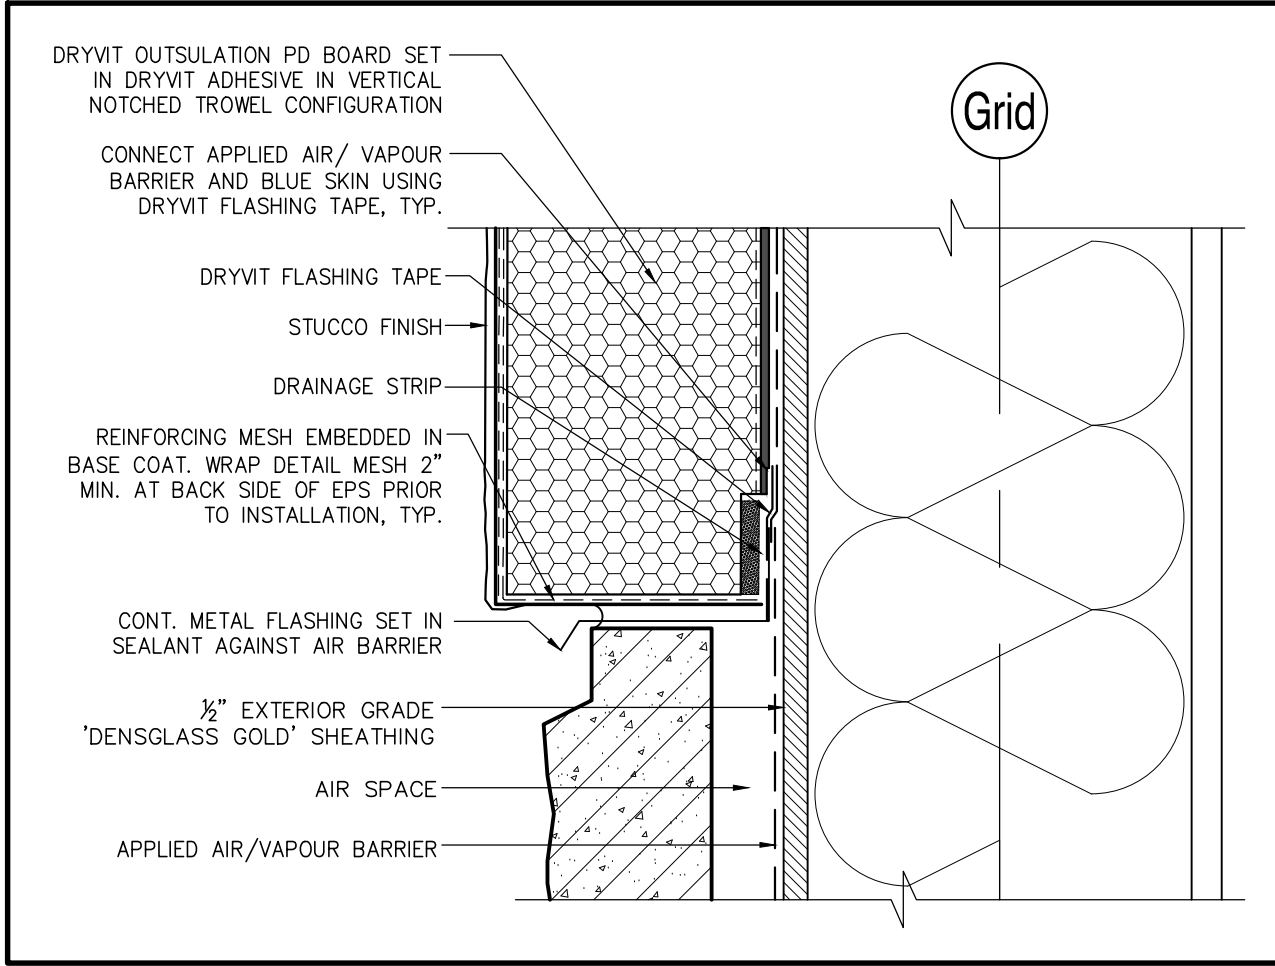


2 SECTION DETAIL
SCALE: 3\"/>

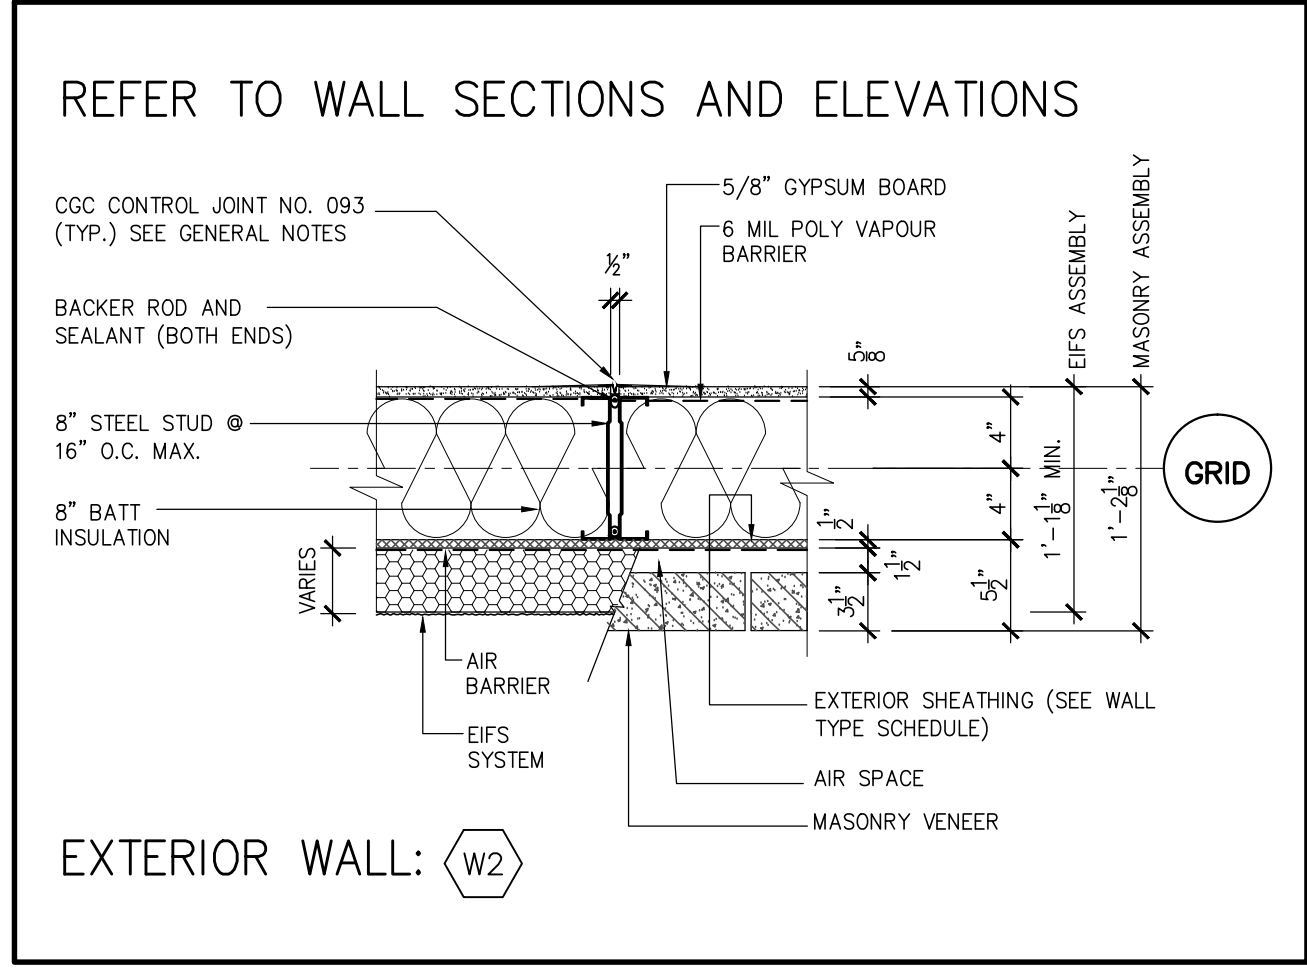


21 PLAN DETAIL
SCALE: 3\"/>

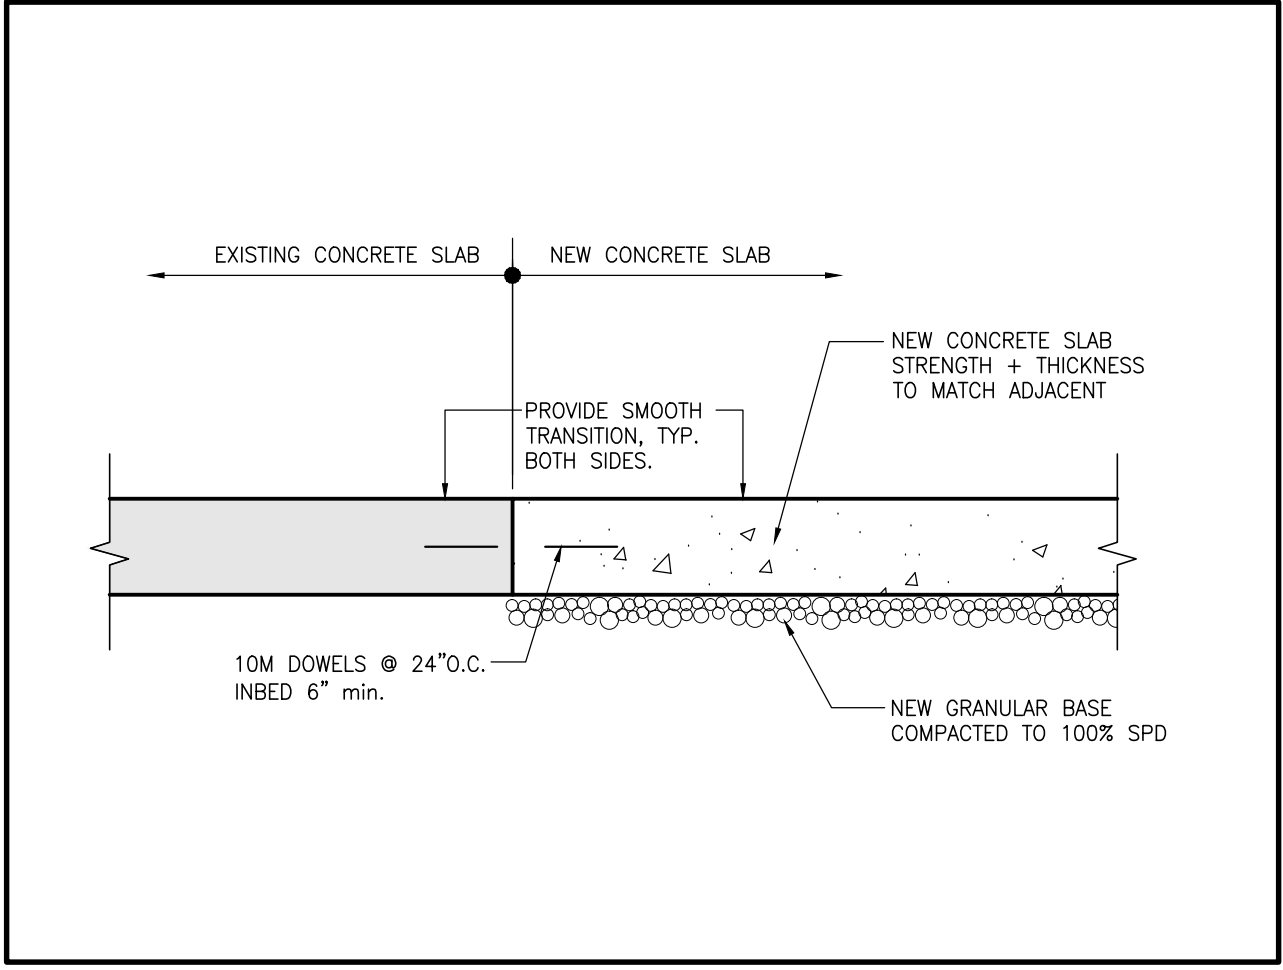


16 SECTION DETAIL
SCALE: NTS

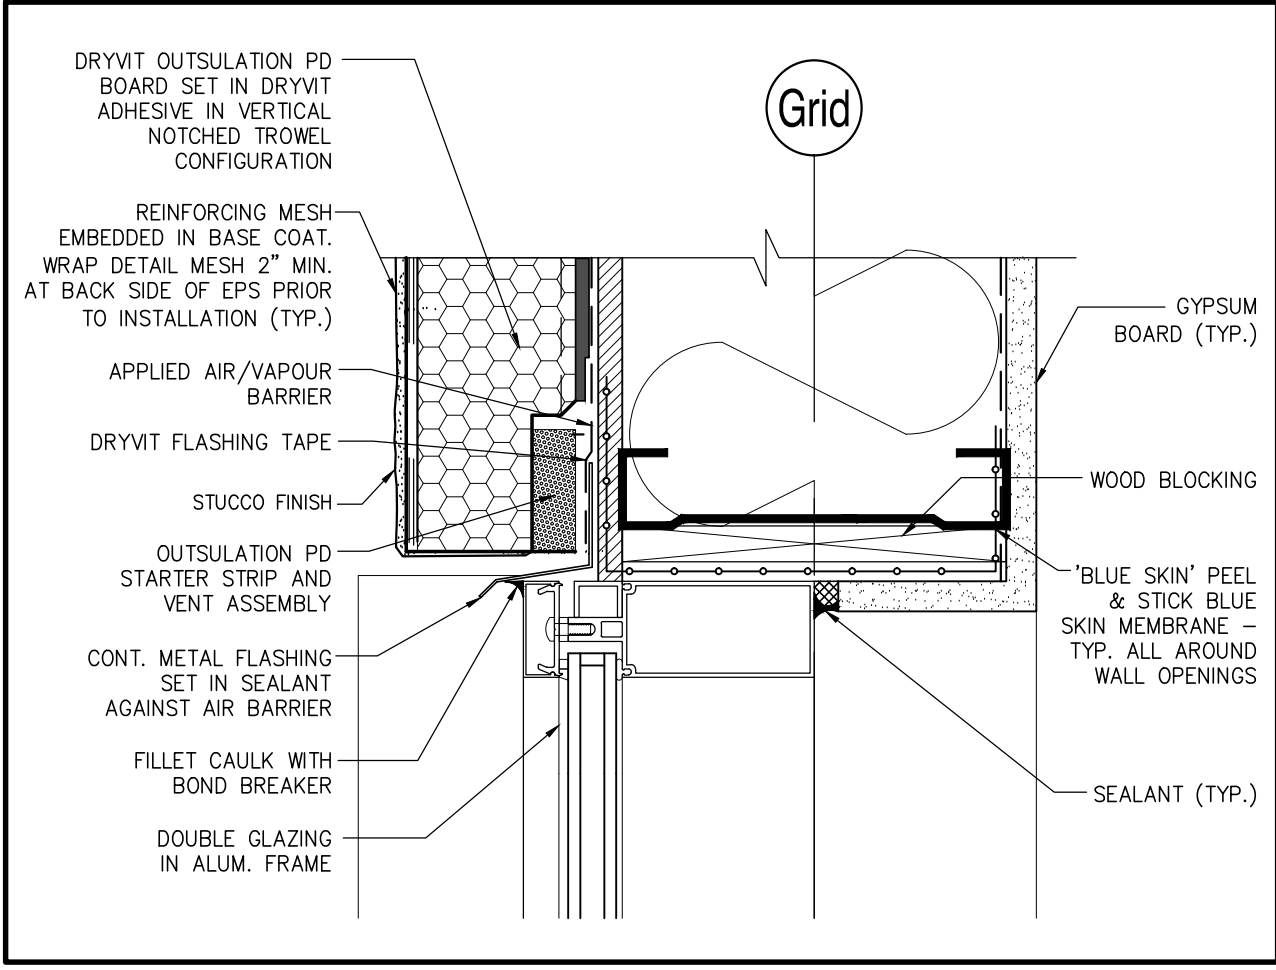

11 SECTION DETAIL
SCALE: 3\"/>

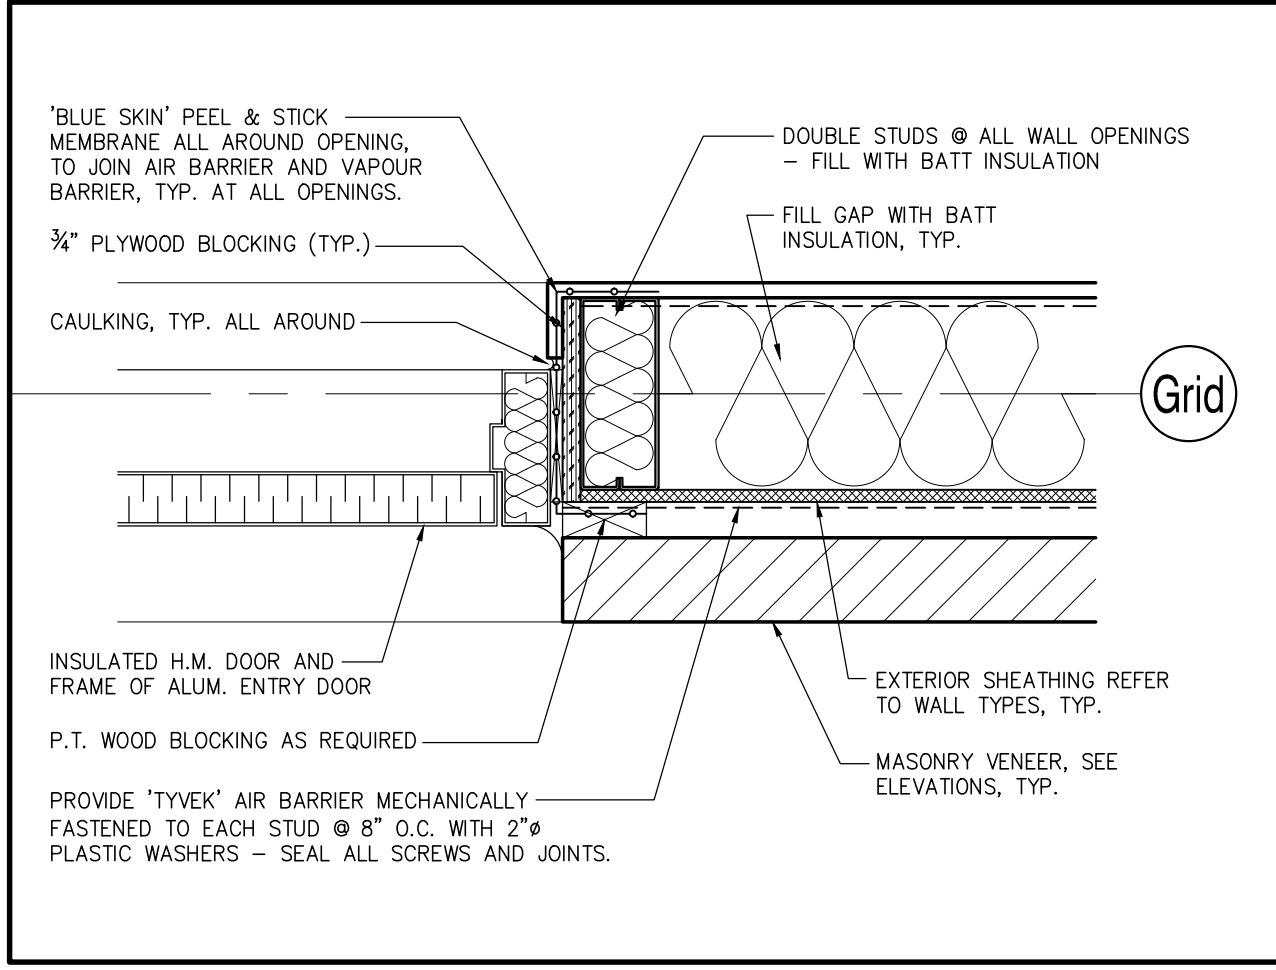

6 PLAN DETAIL
SCALE: 1 1/2\"/>

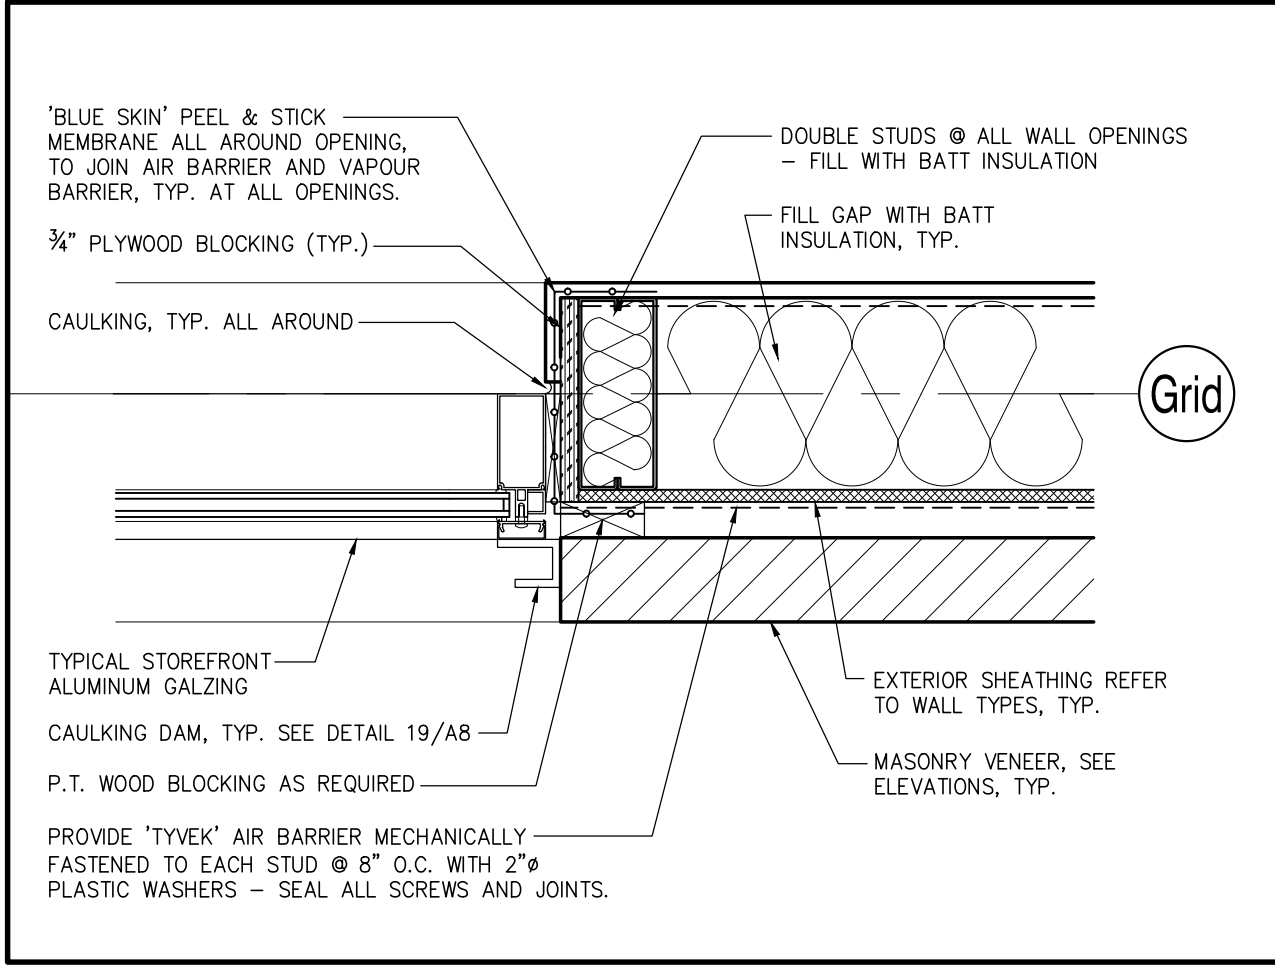

1 PLAN DETAIL
SCALE: 1 1/2\"/>

</			

CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS ON SITE. DO NOT SCALE DRAWINGS.

RIOCAN
MANAGEMENT INC.
RIOCAN YONGE EGLINTON CENTRE, 500-2300 YONGE STREET
P.O. Box 2386, TORONTO, ON, M4P 1E4


LEON LUBELSKI ARCHITECTS INC.
LLA
1200 YONGE STREET, 11TH FLOOR, TORONTO, ON M4T 1B7
416-593-8888

PROJECT: PROPOSED REDEMISE AT
RIOCAN CENTRE WINDSOR
BUILDING G1 (FORMER SEARS)
3051 LEGACY PARK DRIVE WINDSOR, ON
DRAWING TITLE


DETAILS	
DRAWN BY	FC
CHECKED	AZ
SCALE	
DATE	JANUARY 2019
COMM. NO.	19-33
DRAWING NO.	A8

DOOR AND FRAME SCHEDULE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
No.	LOCATION	TYPE	QUANTITY	DOORS										FRAMES / SCREENS						REMARKS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
				SIZE			MATERIAL			FINISH		FIRE RATING		MATERIAL			FINISH		FIRE RATING																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				WIDTH	HEIGHT	THICKNESS	1- EXTRUDED ALUMINUM	2- HOLLOW METAL	3- INSULATED HOLLOW METAL	4- SOLID CORE WOOD	5- HOLLOW CORE WOOD	6- SOLID WPL - COLOURED	7- PREFINISHED	8- PAINT	9- PLASTIC	10- SOLID WPL	11- 5/4 HOUR	12- 1.5 HOUR	1- HEADER / JAMB DETAIL		2- EXTRUDED ALUMINUM	3- HOLLOW METAL	4- INSULATED HOLLOW METAL	5- PRESSED STEEL INSULATED	6- PREFINISHED	7- PAINT	8- 5/4 HOUR	9- 1.5 HOUR																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
100	GIANT TIGER ENTRANCE	A	1	8'-0"	7'-8"	1 3/4"	1										B-B	1	2	3	1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										</


9 DOOR SCHEDULE
SCALE: N.T.S.

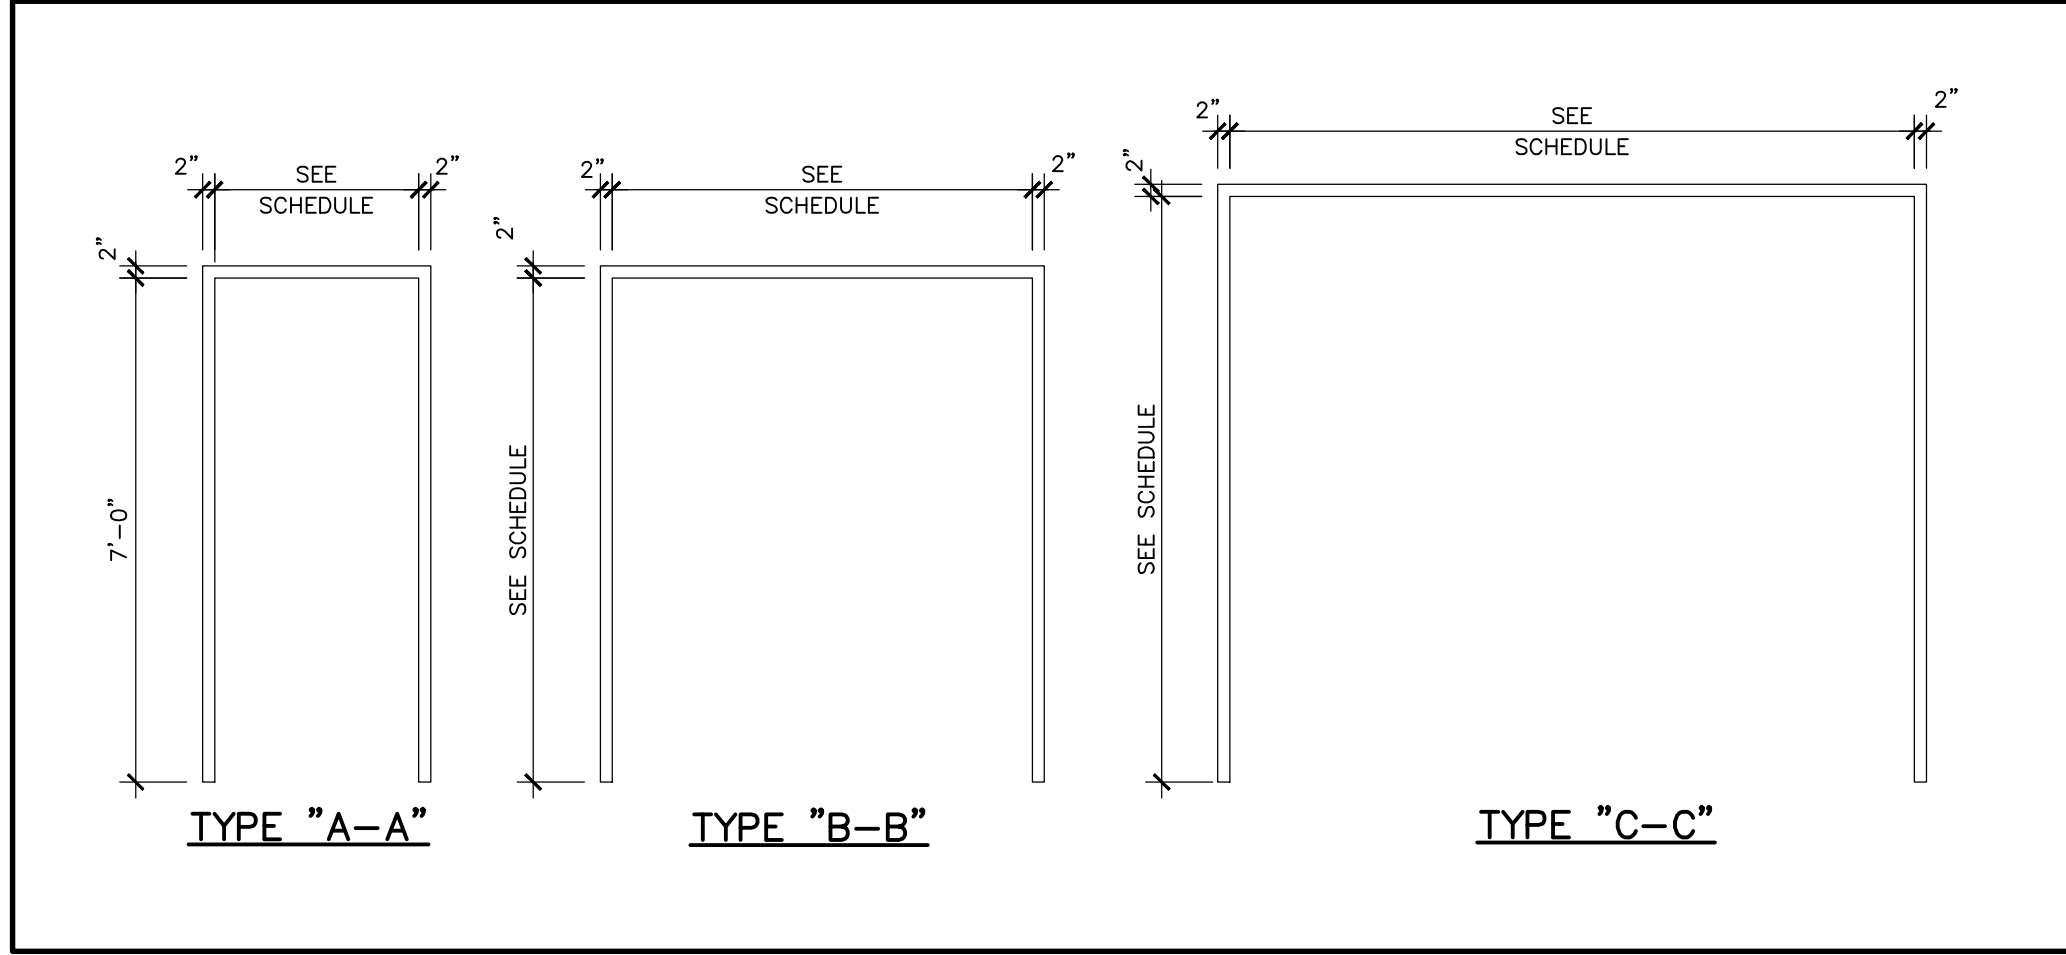


6 FRAME TYPES
SCALE: N.T.S.

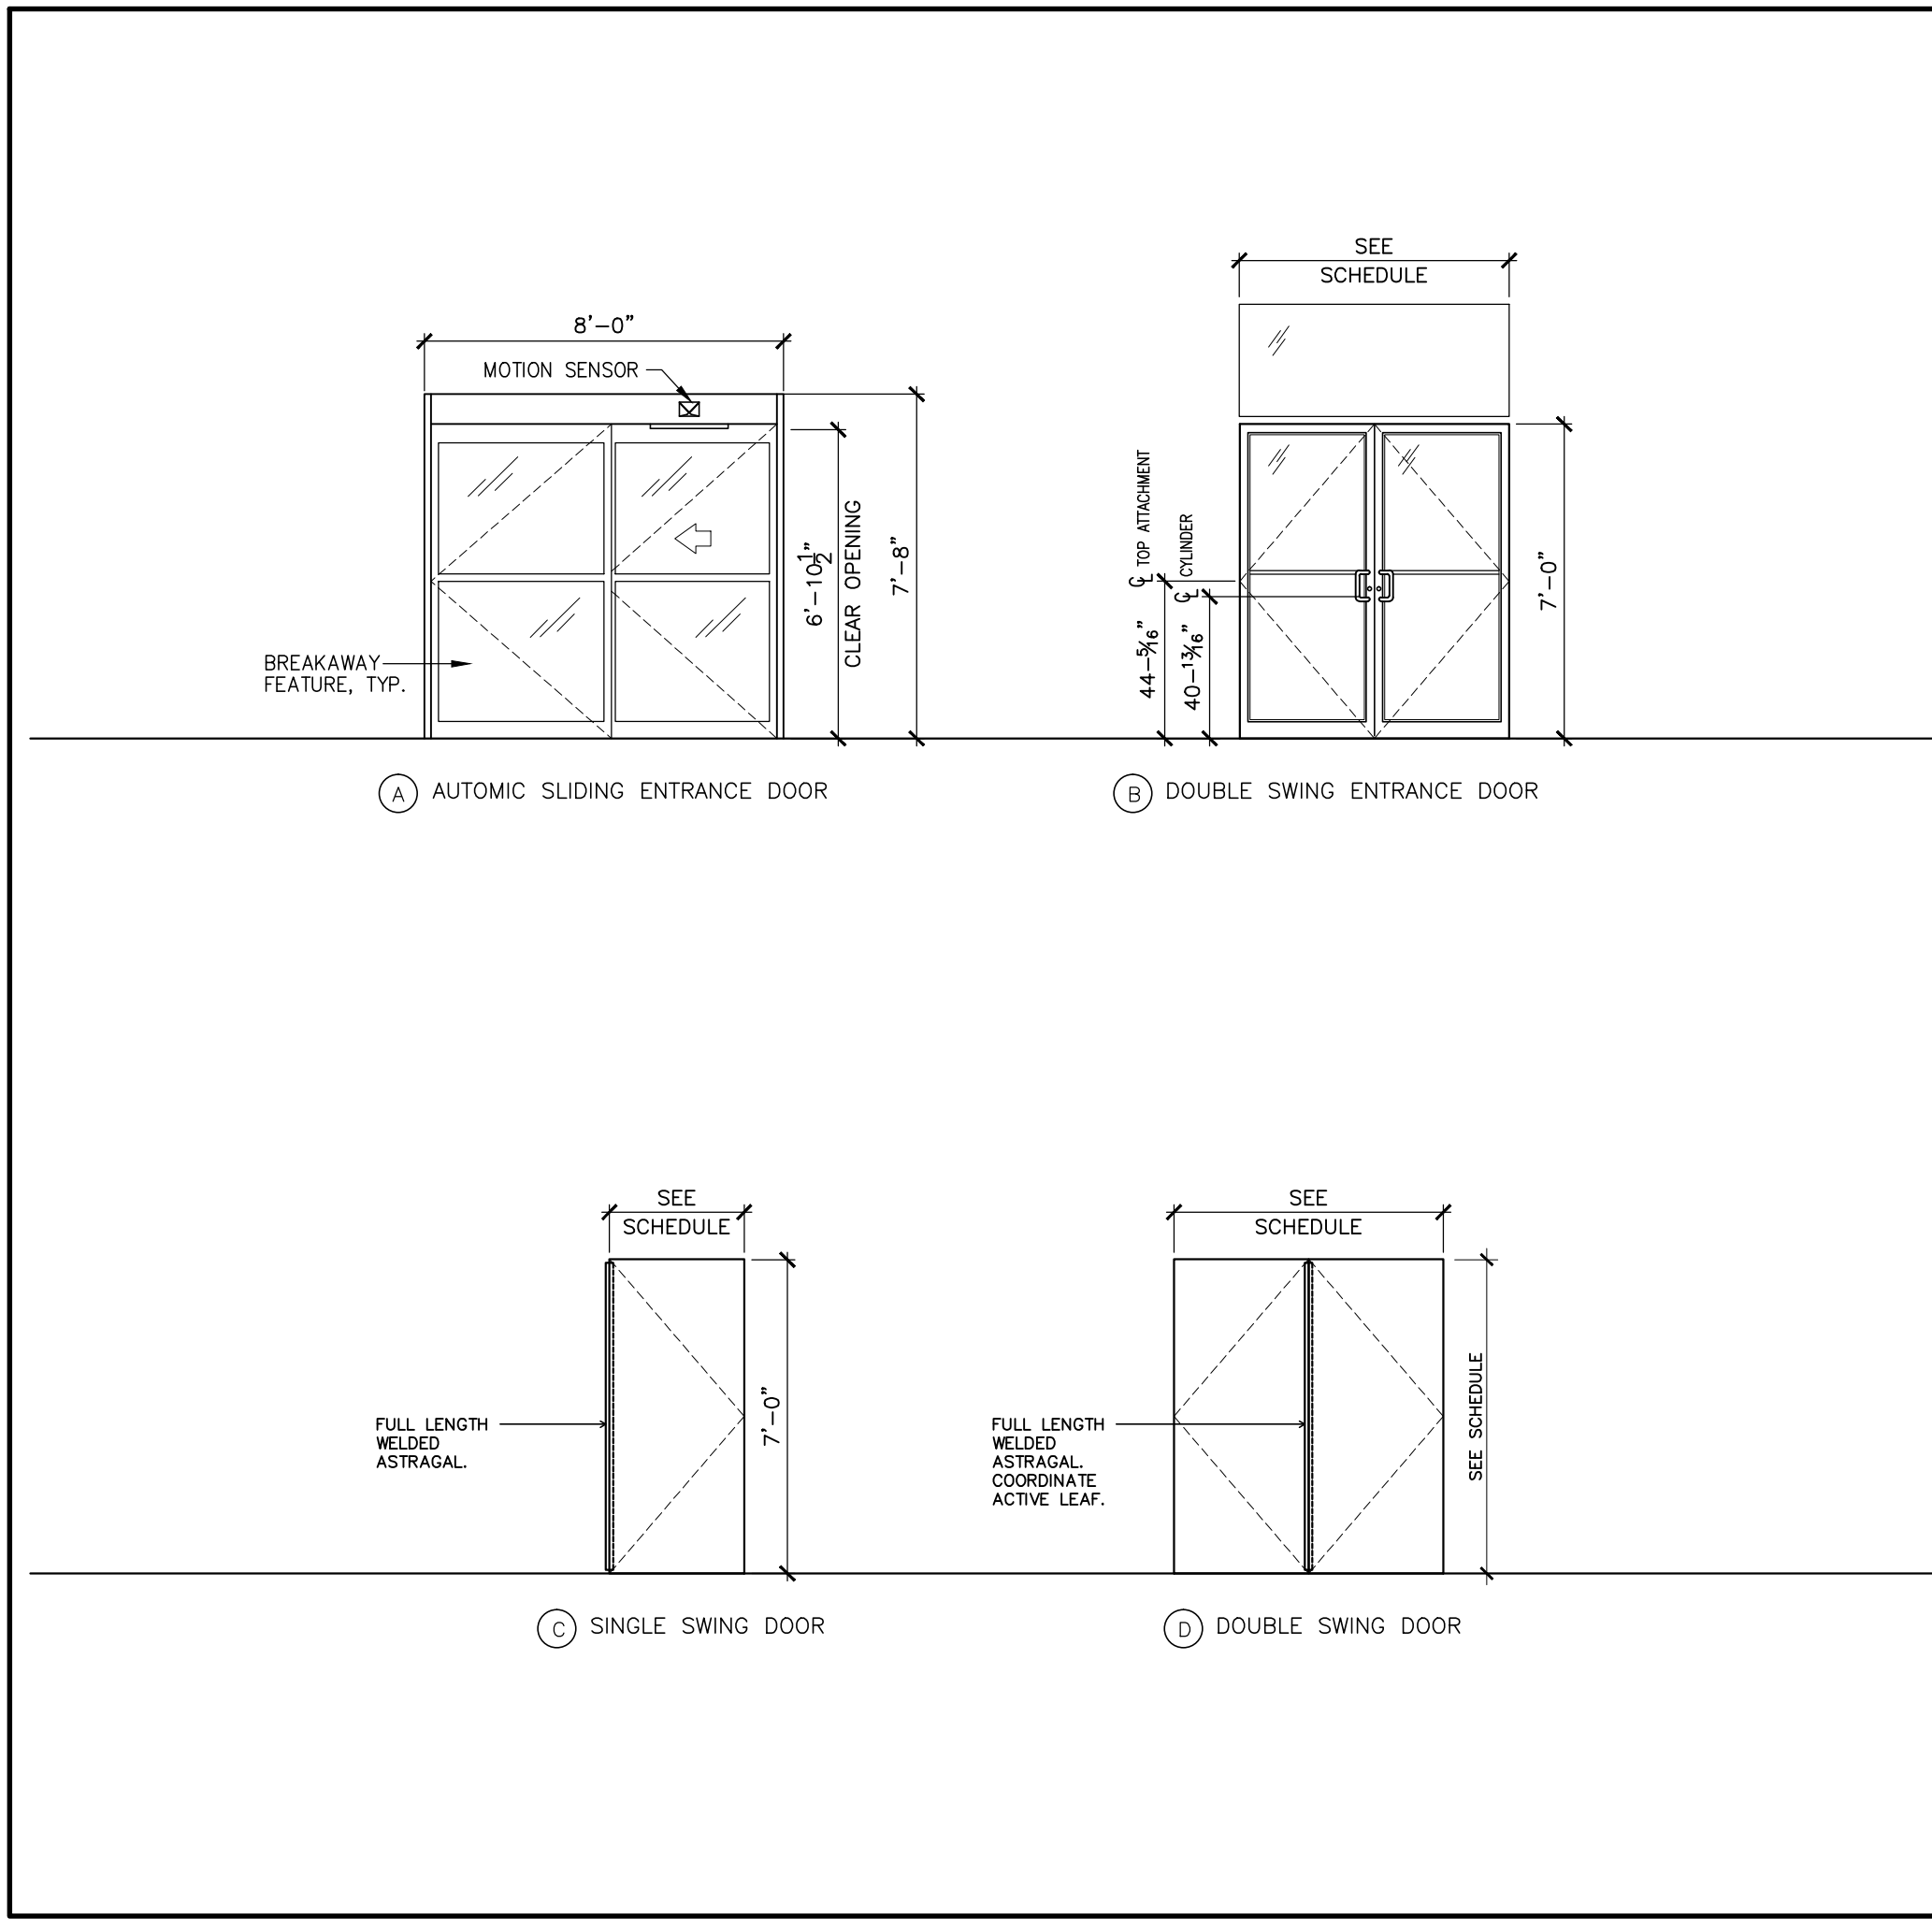


5 DOOR TYPES
SCALE: N.T.S.




11 NOT USED
SCALE: N.T.S.

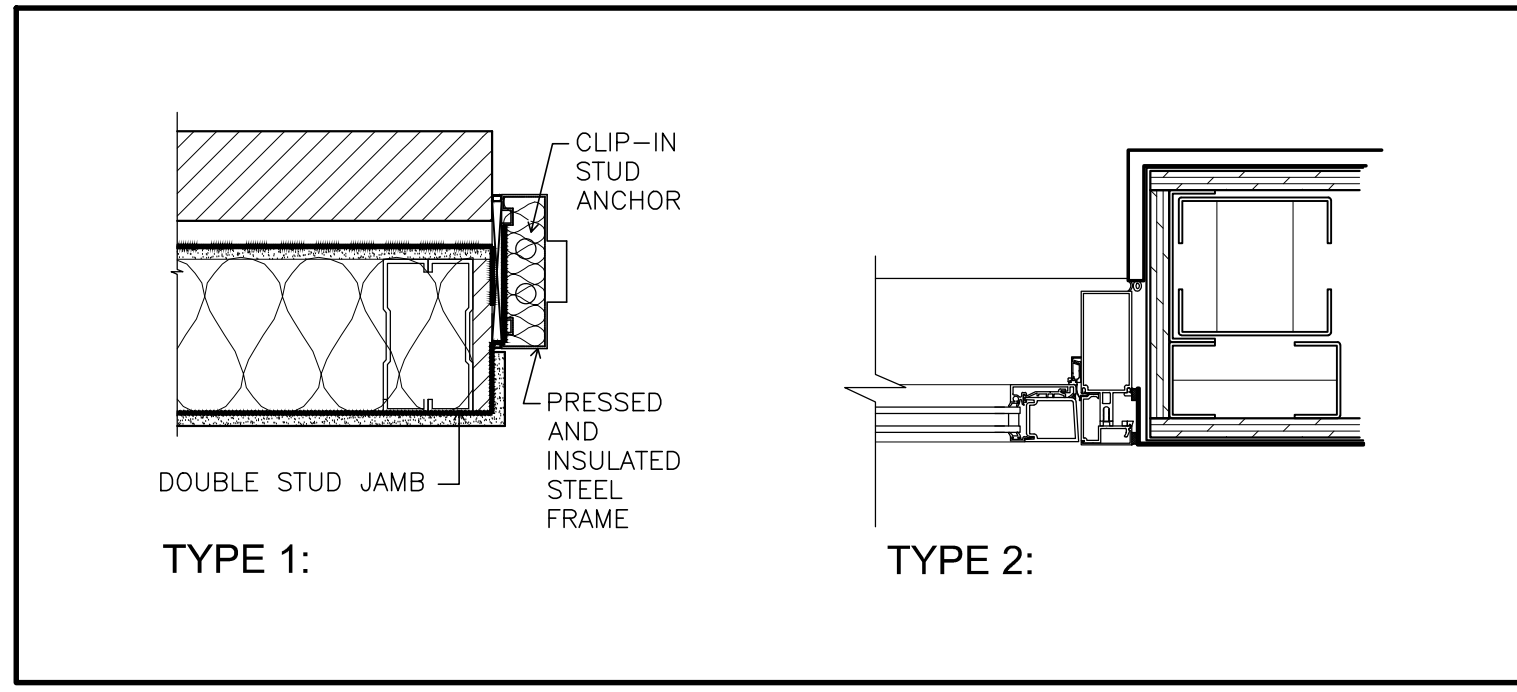


8 FRAME DETAILS/HEAD & JAMB
SCALE: N.T.S.

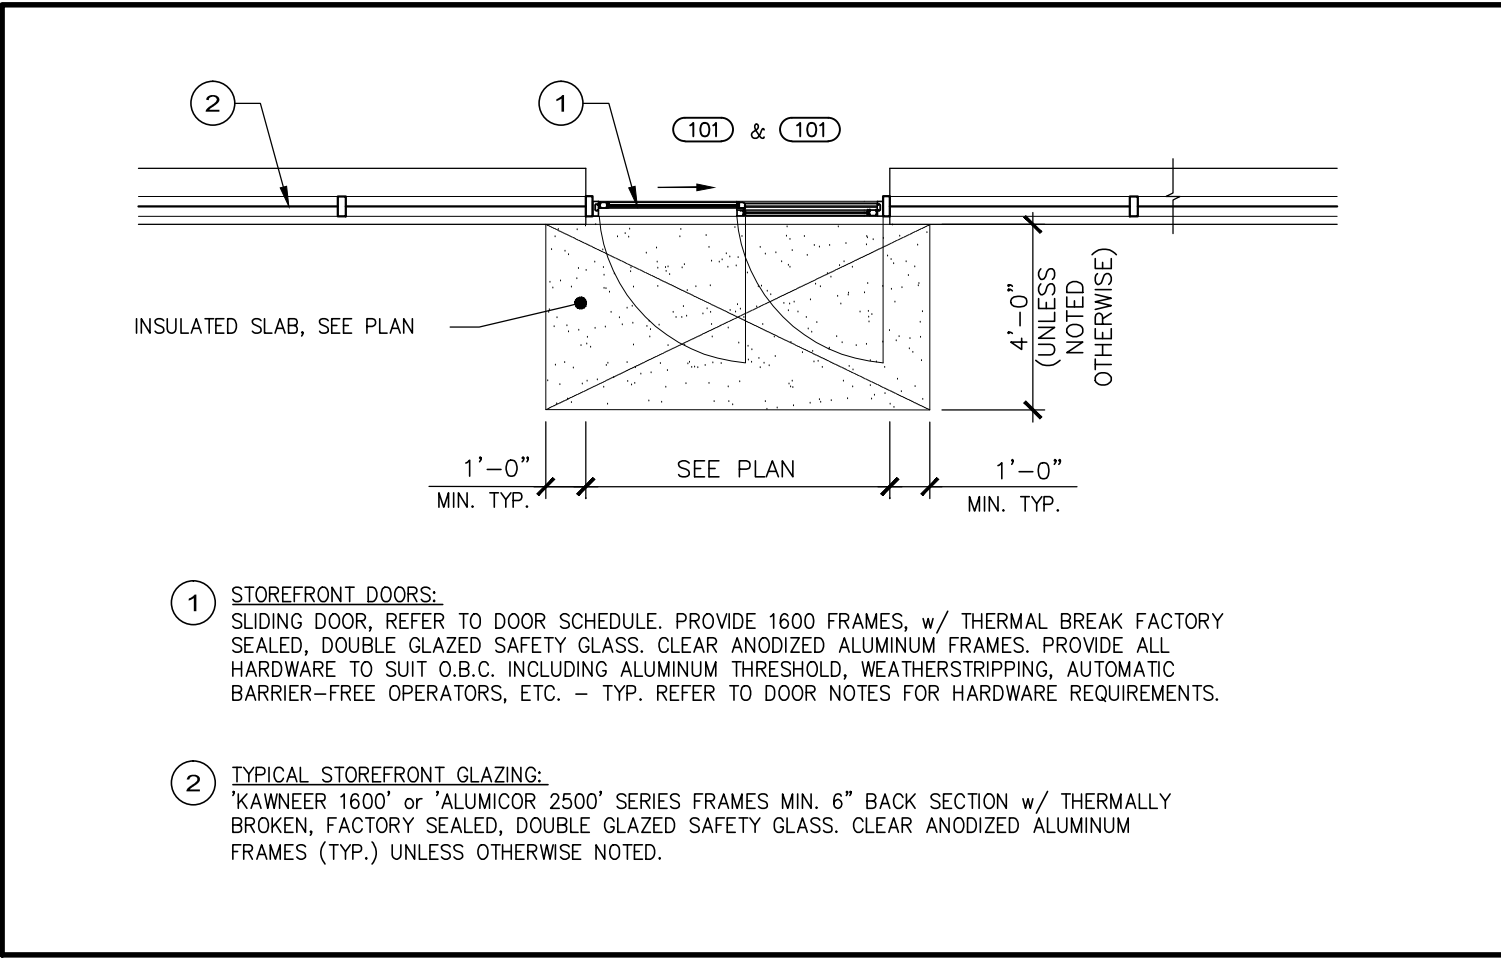

10 TYP. STOREFRONT DOOR & GLAZING
SCALE: N.T.S.

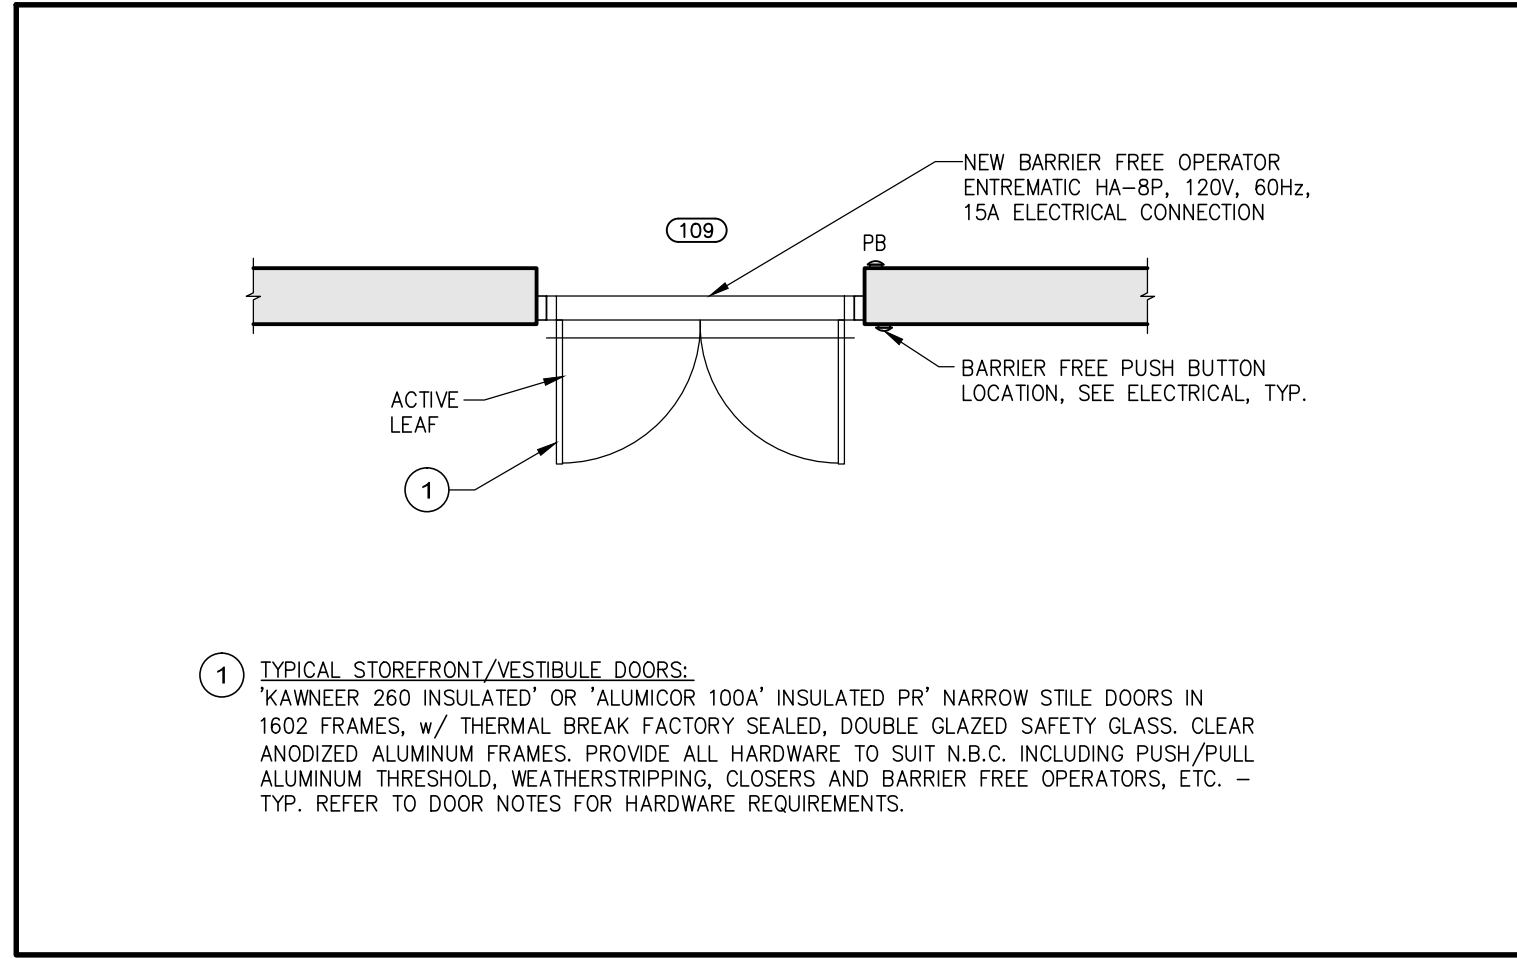

7 TYP. STOREFRONT DOOR & GLAZING
SCALE: N.T.S.

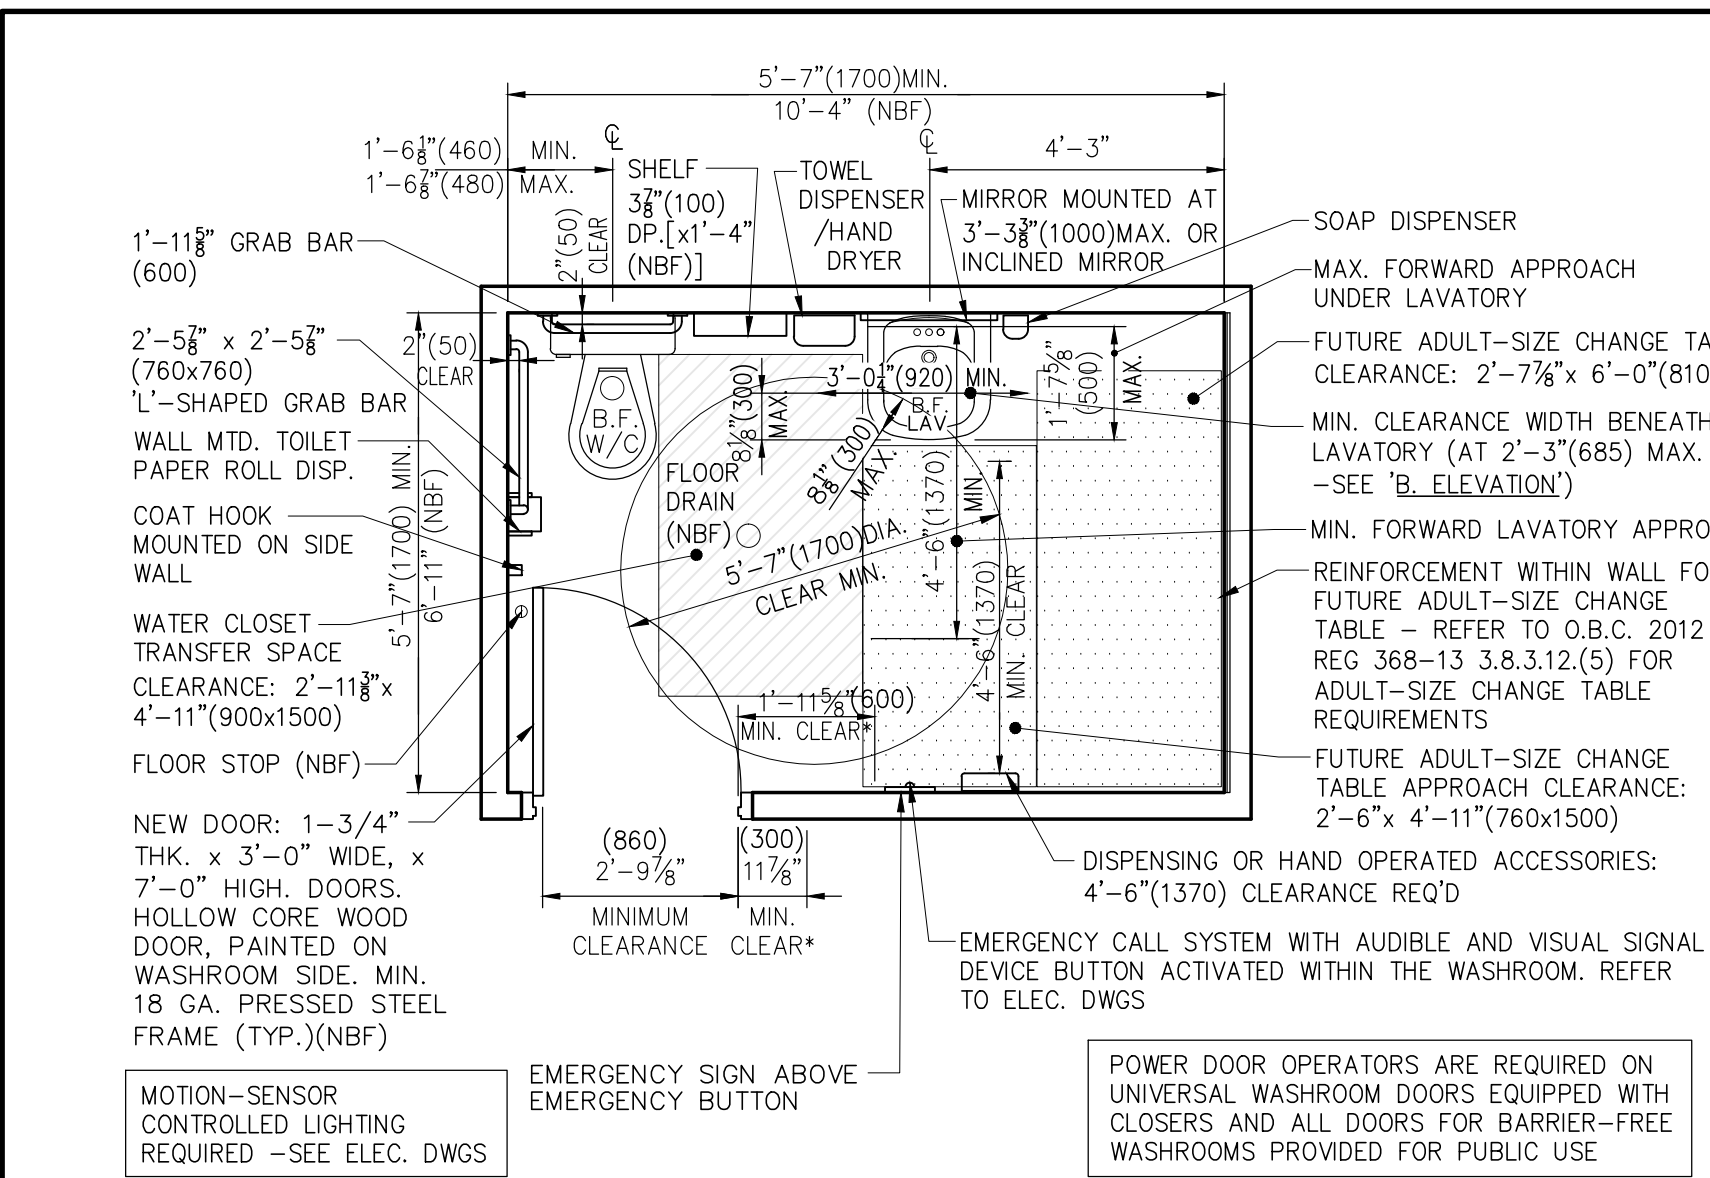

UNIVERSAL WASHROOM - WITH ADULT-SIZE CHANGE TABLE CLEARANCE
THIS PLAN APPLIES TO UNIVERSAL WASHROOMS LOCATED IN A SUITE USED FOR ASSEMBLY, BUSINESS & PERSONAL SERVICES, MERCANTILE OR INDUSTRIAL OCCUPANCIES AND:
- IS MORE THAN 300m² [3,229 ft²] OR
- WHERE ANOTHER UNIVERSAL WASHROOM WITH CLEAR SPACE AND WALL REINFORCEMENT IS NOT PROVIDED FOR AN ADULT-SIZED CHANGE TABLE WITHIN 45m ON THE SAME FLOOR LEVEL.

NOTE:
THIS TYPICAL UNIVERSAL WASHROOM LAYOUT HAS BEEN PROVIDED TO ENSURE COMPLIANCE WITH THE 2012 O.B.C. REFER TO ACTUAL WASHROOM LAYOUT & DIMENSIONS. REFER TO WALL TYPE CONSTRUCTION.

- PRODUCT SPECIFICATIONS
- GRAB BAR BY WATROUS.
 - TOILET DISPENSER, # 0263-1, BY WATROUS PER OBC REQUIREMENTS.
 - PAPER TOWEL DISPENSER AND DISPOSAL, SUITABLE FOR RECESSED INSTALLATION, # W-0462-AD BY WATROUS.
 - FIXED TILT MIRROR 16" X 30", # 0535-1630 BY WATROUS.
 - WALL MOUNTED SOAP DISPENSER, "DEBTON" 2 LITRE CAPACITY BY DEB SWARFEGA INC.


VINYL FLOOR TILE: ARMSTRONG EXCELON #51904 'GREY'
(IF NOT SPECIFIED USE BOBBICK OR SIMILAR APPROVED WASHROOM EQUIPMENT)

(DETAIL PROVIDED FOR ALL ROUGH-IN LOCATIONS
- REFER TO PLAN FOR REQUIREMENTS)


- BARRIER-FREE & UNIVERSAL WASHROOM GENERAL NOTES:**
- ALL DIMENSIONS SHOWN IN BRACKETS ARE METRIC MILLIMETERS (mm) PER THE O.B.C. 2012 REG 368-13 SECTION 3.8 BARRIER-FREE DESIGN.
 - ITEMS INDICATED '(NBF)' ARE TYPICAL WASHROOM REQUIREMENTS BUT NOT REQUIREMENTS OF THE O.B.C. 2012 REG 368-13 SECTION 3.8 BARRIER-FREE DESIGN. (SEE 'B' ELEVATION)
 - MINIMUM CLEARANCE DIMENSIONS AT LATCH SIDES OF DOORS INDICATED '4\"

ROUGH-IN NOTE:
LOCATE ROUGH-INS TO ACCOMMODATE FOR ANY BOXED IN ENCLOSURES AROUND STRUCTURE INCLUDING BRACING AS INDICATED ON PLAN, ALLOW FOR 3/8\"


GENERAL NOTES:
- MOUNTING HEIGHTS OF ACCESSORIES FOR BARRIER-FREE USE AND WALL REINFORCING TO SUIT INSTALLATION AS RECOMMENDED BY PRODUCT MANUFACTURER AND TO COMPLY WITH O.B.C. STANDARDS.
- BARRIER FREE WASHROOM AND ALL PLUMBING FIXTURES TO COMPLY WITH ALL REQUIREMENTS OF O.B.C. 3.8
- NO COMBUSTIBLE PLUMBING ALLOWED WITHIN RETURN AIR FLENUM.
- NO ABS PLUMBING PERMITTED.

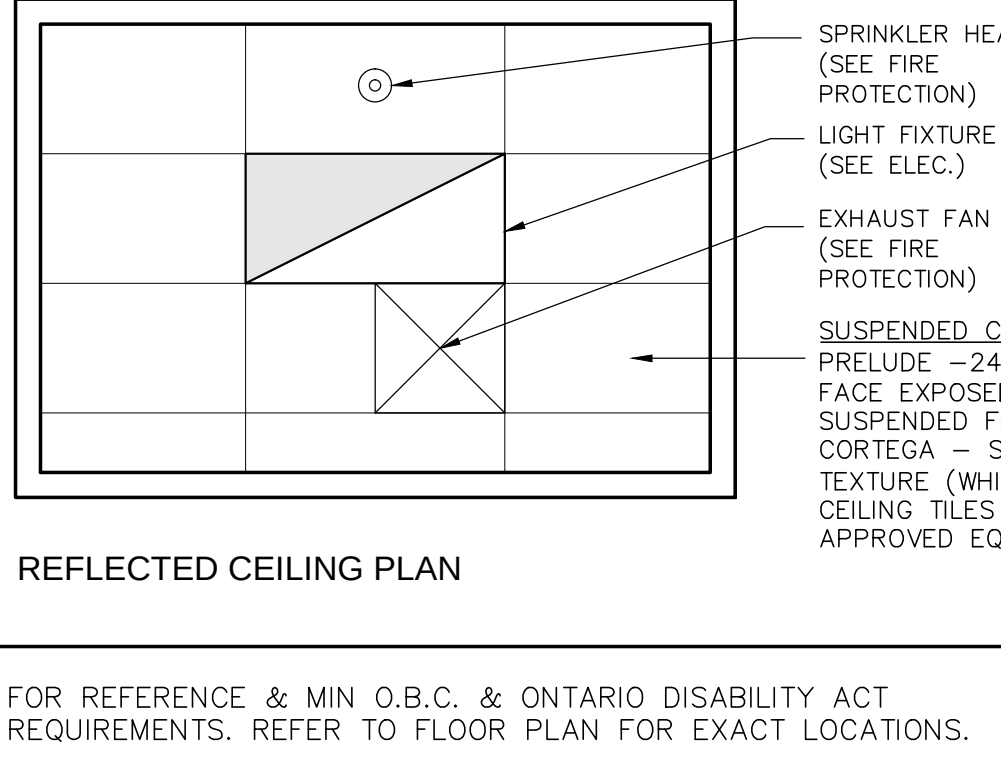


REFLECTED CEILING PLAN
FOR REFERENCE & MIN O.B.C. & ONTARIO DISABILITY ACT REQUIREMENTS. REFER TO FLOOR PLAN FOR EXACT LOCATIONS.

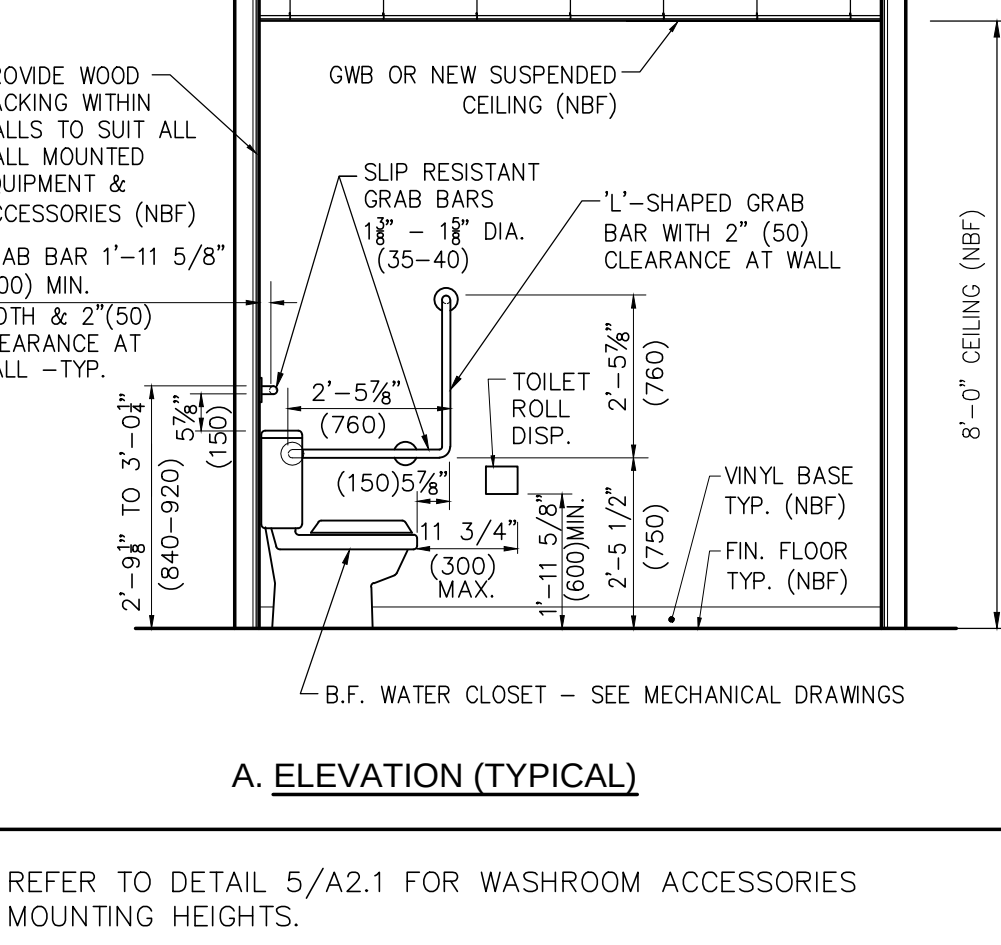

A. ELEVATION (TYPICAL)
REFER TO DETAIL 5/A2.1 FOR WASHROOM ACCESSORIES MOUNTING HEIGHTS.

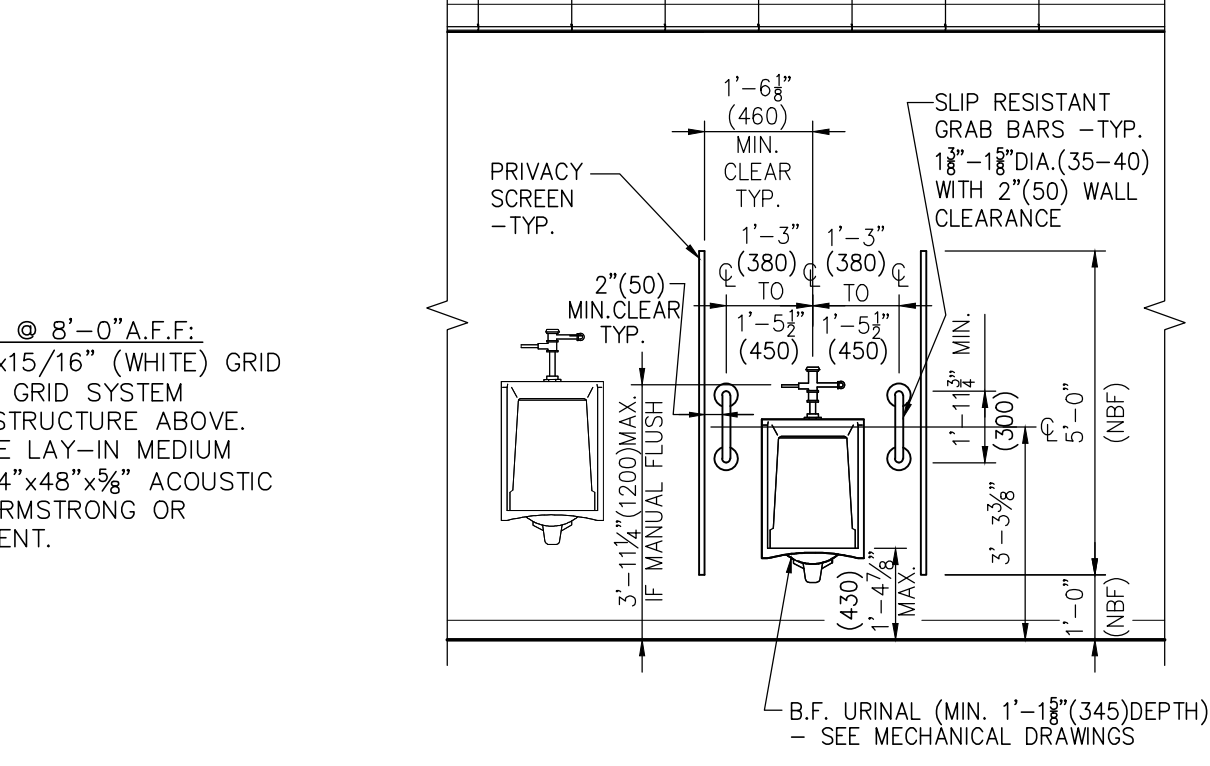

C. ELEVATION (TYPICAL)
BARRIER-FREE REQUIREMENTS FOR ONE URINAL WHEN MORE THAN ONE URINAL IS REQUIRED

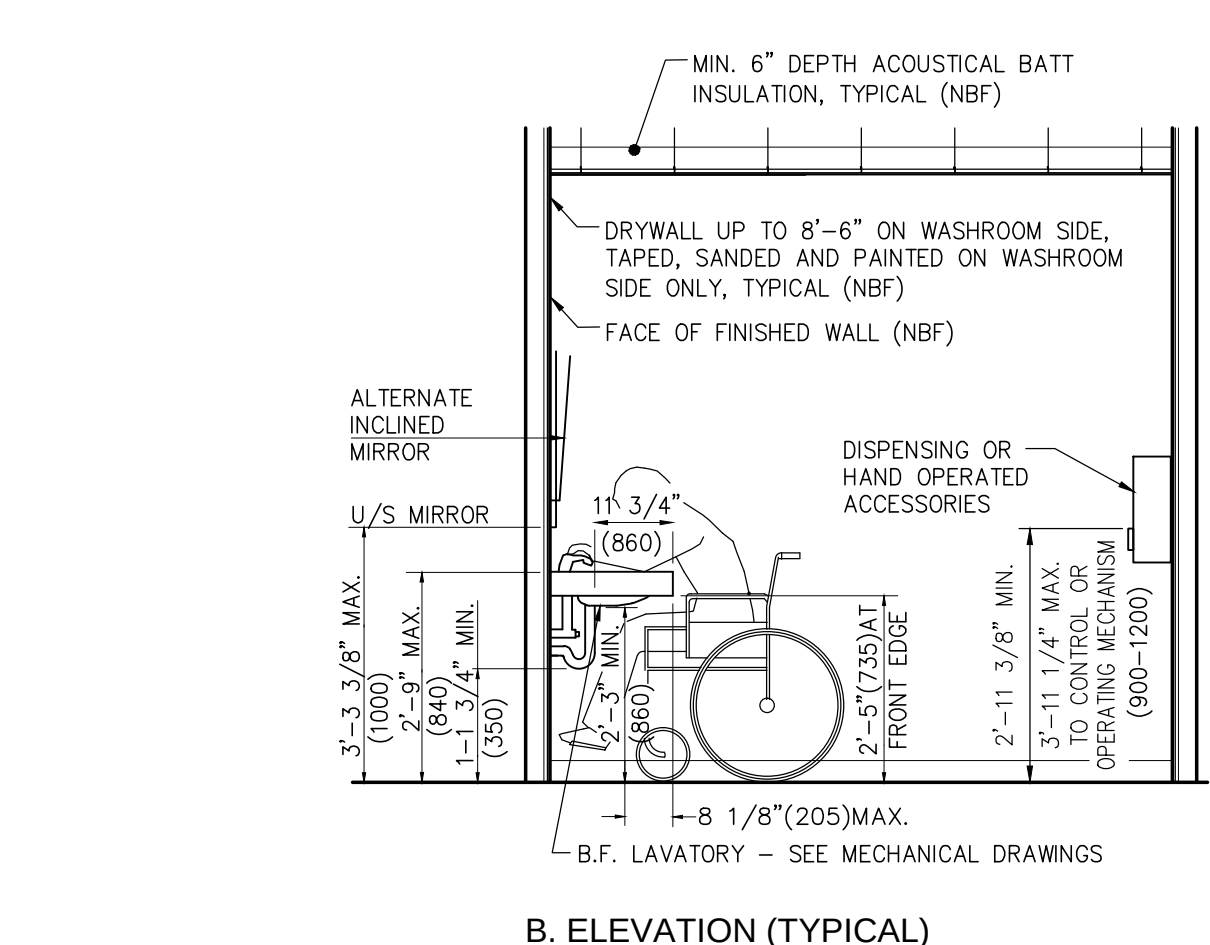


B. ELEVATION (TYPICAL)
REFER TO DETAIL 5/A2.1 FOR WASHROOM ACCESSORIES MOUNTING HEIGHTS.


4 BARRIER-FREE & UNIVERSAL WASHROOM REQUIREMENTS
SCALE: N.T.S.

DOOR HARDWARE			
HEADING #1			
1 SL DR 102 NEW UNIT 03 TO EXTERIOR - RETAIL	SLIDER		
1 SL DR 103 NEW UNIT 03 TO EXTERIOR - RETAIL	SLIDER		
TYPE A 8'-0" x 7'-0" x 1-3/4"	ALD / ALF		
0 HARDWARE DOOR/ FRAME/ HARDWARE - BY OTHERS.			
HEADING #2			
1 PR DRS D109	EXTERIOR FROM VACANT UNIT	LHR/RHR	
TYPE B - 2 @ 3' x 7' x 1-3/4"	ALD / ALF		
6 HINGES	MPB91 454 NRP	320	
1 MS DEADLOCK	1850S 31/32" ACTIVE DOOR	628	
1 DEADLOCK LEVER	4550 MS ACTIVE DOOR	628	
1 MORTISE CYLINDERS	M100 SC ACTIVE DOOR	628	
2 PUSH BAR/OFFSET PULL	2612-2 X 603.3	628	
1 DOOR CLOSERS	1461 PUSH MOUNT INACTIVE DOOR	659	
2 OVERHEAD STOPS	104S CONSEALED	320	
1 BF OPERATOR	DAL-100 PUSH ACTIVE DOOR	CL	
2 ACTUATOR BUTTONS	CM-45/2 C/W CM43CBL BACK BOXES	320	
1 THRESHOLDS	CT 10 72"	AL	
2 DOOR SWEEPS	W24S 36"	AL	
NOTE: FLUSHBOLTS AND WEATHERSTRIP TO BE PROVIDED BY AL DR SUPPLIER			
HEADING #3			
1 SGL DR 102 GIANT TIGER EAST DOOR TO EXTERIOR	LHR		
1 SGL DR 107 VACANT UNIT SOUTH DOOR TO EXTERIOR	LHR		
1 SGL DR 114 EXIT CORRIDOR DOOR TO EXTERIOR	LHR		
TYPE C 3'-2" x 7'-0" x 1-3/4"	IHMD / IHMF		
9 HINGES	MPB91 454 NRP	630	
3 EXIT DEVICE	22NL X 230NL 3"	628	
3 RIM CYLINDER	R118 SC	626	
3 DOOR CLOSER	1461 CUSH (PUSH)	689	
3 KICKPLATE	80A 8" X 34.5" SCREWS	630	
3 THRESHOLD	CT10 X 3"	AL	
3 WEATHERSTRIP	W17N X 17" (103', 207')	AL	
3 DOOR SWEEP	W13S 3"	AL	
HEADING #4			
1 SGL DR 103 GIANT TIGER SOUTH DOOR TO EXTERIOR	LHR		
1 SGL DR 110 GIANT TIGER SOUTH DOOR TO EXTERIOR	LHR		
1 SGL DR 111 GIANT TIGER ELECTRICAL ROOM DOOR TO EXTERIOR	LHR		
TYPE C 3'-0" x 7'-0" x 1-3/4" (V.I.F.)	IHMD / IHMF		
9 HINGES	MPB91 454 NRP	630	
3 EXIT DEVICE	22NL X 230NL 3"	628	
3 RIM CYLINDER	R118 SC	626	
3 DOOR CLOSER	1461 CUSH (PUSH)	689	
3 KICKPLATE	80A 8" X 34.5" SCREWS	630	
3 THRESHOLD	CT10 X 3"	AL	
3 WEATHERSTRIP	W17N X 17" (103', 207')	AL	
3 DOOR SWEEP	W13S 3"	AL	
HEADING #5			
1 SGL DR D113 VACANT UNIT TO EXIT CORRIDOR	RHR		
TYPE C - 3'-2" x 7' x 1-3/4"	IHMD / IHMF		
3 HINGES	MPB91 454 NRP	626	
1 RIM CYLINDER	R118 SC	626	
1 EXIT DEVICE	22NL X 230NL TRIM	689	
1 DOOR CLOSER	1461 CUSH	630	
1 KICKPLATE	8 X 36.5 TAPE	630	
HEADING #6			
1 PR DRS 104	EXTERIOR FROM GIANT TIGER	LHR/RHR	
TYPE D - 2 @ 3' x 7' x 1-3/4" (V.I.F.)	IHMD / IHMF	90 MIN	
12 HINGES	MPB91 454 NRP	630	
4 RIM CYLINDERS	R118 SC	626	
4 FR EXIT DEVICES	2227NL-F X 230NL TRIM	689	
4 DOOR CLOSERS	1461 CUSH	689	
4 KICKPLATES	8 X 34.5 TAPE	630	
2 THRESHOLDS	CT 10 72"	AL	
2 WEATHERSTRIPS	W17S 1 @ 6", 2 @ 7"	AL	
4 DOOR SWEEPS	W24S 3"	AL	
2 ASTRAGALS	W25 7"	AL	
HEADING #7			
1 SGL DR D108 VACANT UNIT WEST EXIT DOOR	RHR		
3' X 7' X 1-3/4"			
EXISTING DOOR TO REMAIN, G.C. TO ENSURE DOOR LATCHES/LOCKS SHUT			

3 DOOR HARDWARE
SCALE: N.T.S.

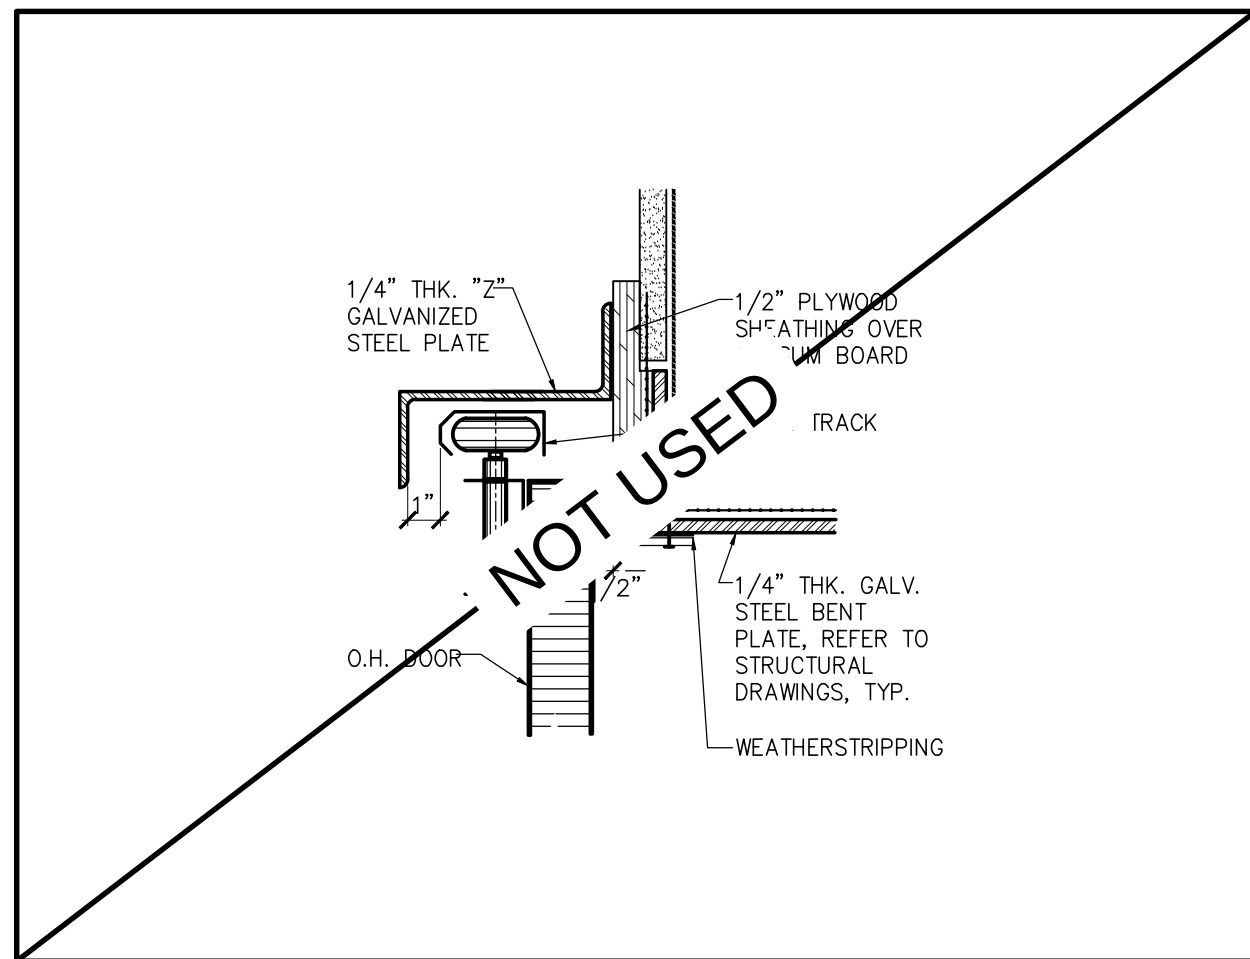

2 PLAN DETAIL
SCALE: N.T.S.

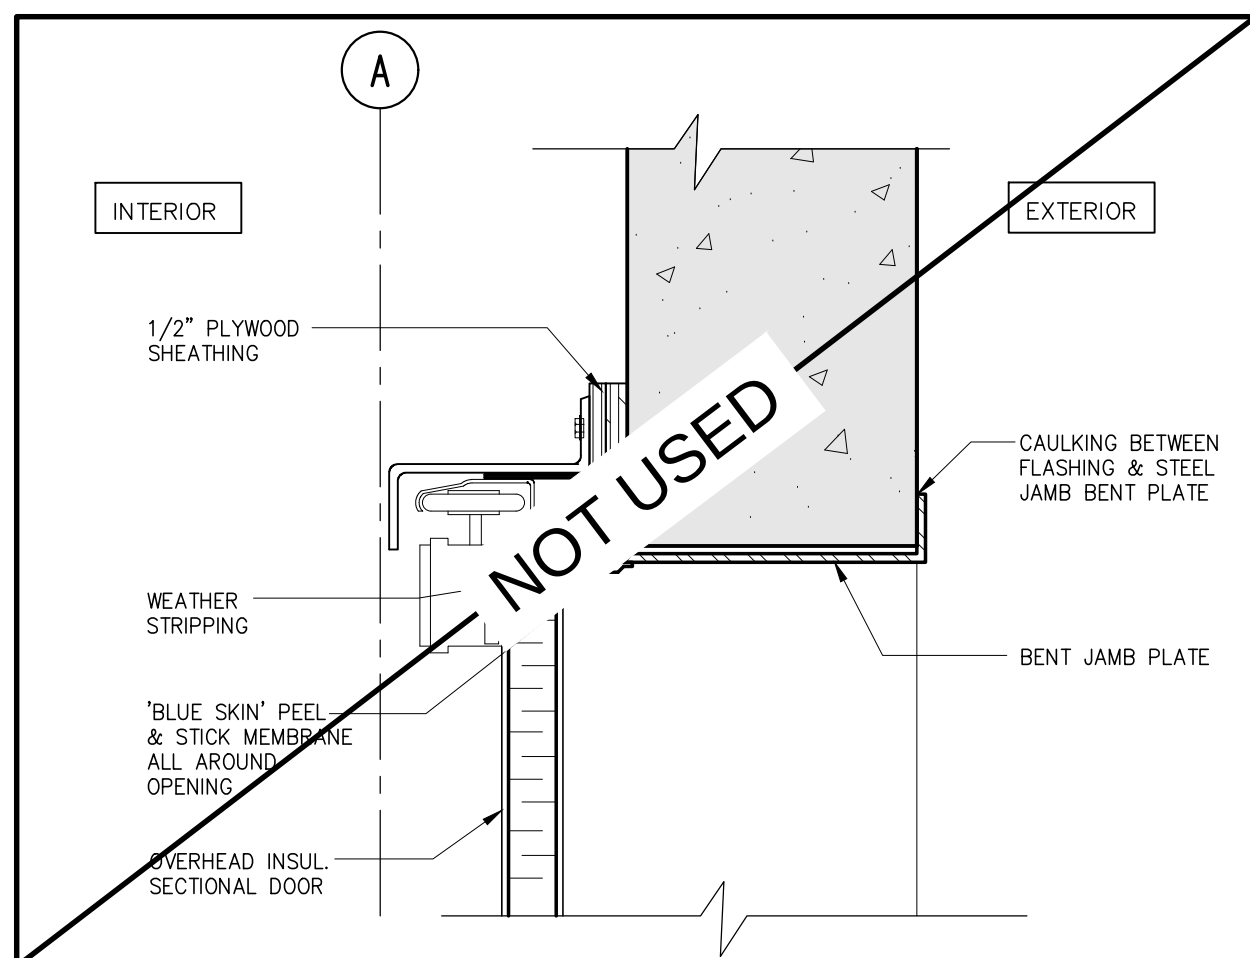

1 OVERHEAD DOOR DETAIL AT EXTERIOR
SCALE: N.T.S.

DOOR SCHEDULE & DETAILS			
PROJECT			
PROPOSED REDEMISE AT RIOCAN CENTRE WINDSOR BUILDING G1 (FORMER SEARS) 3051 LEGACY PARK DRIVE WINDSOR, ON			
DRAWING TITLE			
DOOR SCHEDULE & DETAILS			
DRAWN BY AK COMM. NO. 19-33			
CHECKED AZ DRAWING NO.			
SCALE			
DATE JANUARY 2019			

DUROCK PUCCS

PRESSURE-UTILIZED COMPARTMENTED CAVITY SYSTEM EXTERIOR INSULATION FINISH SYSTEM FOR NON-COMBUSTIBLE CONSTRUCTION MANUFACTURER'S SPECIFICATION 07 24 10

PART 1 - GENERAL

1. RELATED SECTIONS
1. SPECIFICATION 03 30 00 - CAST-IN-PLACE CONCRETE
 1. SPECIFICATION 04 10 00 - UNIT MASONRY
 1. SPECIFICATION 05 40 00 - COLLOR-DIMED METAL FRAMING
 1. SPECIFICATION 06 10 00 - ROUGH CARPENTRY
 1. SPECIFICATION 06 10 00 - ROUGH CARPENTRY
 1. SPECIFICATION 07 60 00 - FLASHING & SHEET METAL
 1. SPECIFICATION 07 80 00 - JOINT PROTECTION (SEALANTS)
 1. SPECIFICATION 08 00 00 - DRAINAGE
 1. SPECIFICATION 09 28 00 - BACKING BOARDS AND UNDERLAYMENTS

2. SYSTEM DESCRIPTION
1. DUROCK PUCCS IS AN EXTERIOR INSULATION AND FINISH SYSTEM THAT INCLUDES AN AIR/MOISTURE BARRIER, OR OPTIONAL AIR/ADJUSTURE VAPOUR BARRIER, APPLIED TO THE BUILDING SUBSTRATE AS A SECONDARY MOISTURE BARRIER.
 2. THIS SYSTEM HAS BEEN EVALUATED AND APPROVED BY THE CANADIAN CONSTRUCTION MATERIALS CENTRE (CMC), UNDER EVALUATION REPORT NO. 12989-18.
 3. DUROCK PUCCS IS INTENDED FOR USE WHERE THE MODEL BUILDING CODE PERMITS THE USE OF FIRE-TESTED WALL ASSEMBLIES THAT INCLUDE COMBUSTIBLE FOAMED PLASTIC INSULATION.

3. DESIGN REQUIREMENTS

1. BUILDING SUBSTRATES (SHALL BE ENGINEERED BY OTHERS; WHEN REQUIRED).
1. SUBSTRATE SUPPORTING DUROCK PUCCS MUST BE STRUCTURALLY SOUND AND CONTINUOUSLY SUPPORTED. ALL SUBSTRATES SHALL BE:
 - A. CONTINUOUS, FLAT AND PLUMB, WITH SURFACE VARIATIONS LESS THAN 2 MM/M (X INCH PER 10 FT).
 - B. DESIGNED TO DEFLECT NOT MORE THAN L/240.
 - C. CLEAN, DRY AND FREE OF ANY DELETERIOUS MATERIAL THAT WOULD AFFECT THE ATTACHMENT OF THE DUROCK PUCCS, SUCH AS WAX, OIL, PAINT, GROUT AND DIRT.
2. MASS WALL SUBSTRATES INCLUDE:
 - A. CAST-IN-PLACE OR PREFABRICATED CONCRETE FREE OF FORM RELEASE AGENTS, AND CONCRETE OR CLAY BRICK MASONRY, UNPAINTED, AND FREE OF EFFLORESCENCE.
 - B. CONCRETE AND MASONRY WALLS MUST BE CURED AT LEAST 28 DAYS.
3. SHEATHING BOARDS SHALL BE ATTACHED WITH CORROSION RESISTANT SCREWS AND SUPPORTED BY ENGINEERED LIGHT GAUGE STEEL STUD FRAMING. SHEATHING JOINTS MUST NOT EXCEED 3.2 MM (1/8 INCH). SHEATHING SHALL BE MINIMUM 12.7 MM (1/2 INCH) THICK, SMC.
4. GLASS-FIBRE FACED EPS/SM SHEATHING SHALL BE COMPLIANT WITH ASTM C 1177.
5. CEMENT BOARD SHALL BE COMPLIANT WITH ASTM C 1325 OR AEA A118.
6. ALL SHEATHING BOARDS MUST BE CONTINUOUSLY SUPPORTED BY FRAMING, AND:
 - A. JOINTS SHALL NOT OCCUR AT THE CORNERS OF THROUGH-WALL PENETRATIONS, SUCH AS WINDOWS OR DOORS.
 - B. BOARDS SHALL BE INSTALLED HORIZONTALLY WITH VERTICAL JOINTS OFFSET, AT LEAST ONE STUD.
7. TERMINATION AND EXPANSION JOINTS
 - A. DUROCK PUCCS MUST TERMINATE AT LEAST:
 - i. 200 MM (8 INCHES) ABOVE FINISHED GRADE.
 - ii. 50 MM (2 INCHES) ABOVE ROOFING SYSTEM.
 - B. EXPANSION AND TERMINATION JOINTS SHALL HAVE AN ELASTOMERIC SEALANT WITH A CLOSED-CELL FOAM BACKER ROD OR BOND BREAKER TAPE, AS SPECIFIED (IN SECTION 07 90 00 AND THE ARCHITECTURAL DRAWINGS).
 - C. SEALANT JOINTS SHALL BE INSTALLED AS REQUIRED IN SUBSECTION 5.6.2 OF THE PROVINCIAL/NATIONAL BUILDING CODE, AND IN GENERAL CONFORMANCE WITH ASTM C 1481.
8. EXPANSION JOINTS IN DUROCK PUCCS ARE FORMED BY BACKWRAPPED TERMINATIONS IN THE SYSTEM, WHEREBY THE INSULATION IS ENCAPSULATED WITH THE REINFORCED BASE COAT.
9. EXPANSION JOINTS SHALL BE DESIGNED BY OTHERS, AND ARE REQUIRED AT THE FOLLOWING LOCATIONS AND WHERE SIGNIFICANT STRUCTURAL MOVEMENT MAY BE EXPECTED TO OCCUR:
 - A. AT THE ADJUNCTION OF DISSIMILAR SUBSTRATES.
 - B. AT FLOOR LINES IN WOOD FRAMED CONSTRUCTION.
 - C. AT DEFLECTION TRACKS IN STEEL FRAMED CONSTRUCTION.
 - D. AT CHANGES IN ROOF LINES, BUILDING SHAPE, OR STRUCTURAL SYSTEM.
10. ALL SEALANT JOINTS SHALL BE VENTED WHERE THE DUROCK PUCCS OR ADJOINING ELEMENT IS EXPECTED TO DRAIN.

3. AIR/MOISTURE BARRIER TRANSITION MEMBRANE:
- A. DUROCK RECOMMENDS THE USE OF PROTECTO WAP EPS TAPE: A POLYESTER-FACED, STYRENEBUTADIENE- STYRENE (SBS), RUBBERIZED ASPHALT, SELF-ADHERING MEMBRANE.
 - B. ALTERNATIVELY, DUROCK APPROVES THE USE OF SORPHEA SOPRASEAL STICK 1100T AND BAKOR BLUESEAL SA POLYETHYLENE-FACED, STYRENE-BUTADIENE- STYRENE (SBS), RUBBERIZED ASPHALT, SELF-ADHERING MEMBRANES.
 - C. PRIMERS SHALL BE IN ACCORDANCE WITH MANUFACTURER SPECIFICATIONS.
2. EXECUTION
- A. TRANSITION MEMBRANES SHALL EFFECTIVELY SEAL THROUGH WALL PENETRATIONS, MOVEMENT JOINTS, JUNCTURES TO WINDOW PENETRATIONS, AND JUNCTURES WITH ROOFING MEMBRANES.
 - B. TRANSITION MEMBRANES SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER SPECIFICATIONS.
 - C. TRANSITION MEMBRANES SHOULD BE INSTALLED PRIOR TO APPLICATION OF THE AIR/MOISTURE BARRIER.
 - D. TRANSITION MEMBRANES SHOULD LAP NO MORE THAN 50 MM (2 INCHES) ONTO THE EPS SUBSTRATE.
 - E. IF PROTECTO WAP EPS TAPE EXTENDS MORE THAN 100 MM (4 INCHES) BEHIND THE EPS, THE EPS SHALL BE MECHANICALLY FASTENED AT THAT LOCATION. IF SORPHEA SOPRASEAL STICK 1100T OR BAKOR BLUESEAL SA EXTENDS MORE THAN 50 MM (2 INCHES) BEHIND THE EPS, THE EPS SHALL BE MECHANICALLY FASTENED AT THAT LOCATION.

4. DECORATIVE ELEMENTS
- A. MOLDINGS, SHAPES, TRIM, AND WINDOW SILLS WHERE THE DUROCK PUCCS MAY BE EXPOSED ARE TO BE DESIGNED WITH A SLOPE ON ALL UPWARD FACING HORIZONTAL PROJECTIONS, SLOPED NOT LESS THAN:
 - i. 6:12, RISE OVER RUN FOR SLOPES UP TO 305 MM (12 INCHES) WIDE, OR
 - ii. 3:12, RISE OVER RUN FOR SLOPES UP TO 102 MM (4 INCHES) WIDE.
 - B. HORIZONTAL PROJECTIONS THAT DO NOT EXCEED 102 MM (4 INCHES) WOULD BE ACCEPTABLE FOR WALL AREAS THAT ARE PARTIALLY ENCLOSED, SUCH AS WHERE A SOFFIT EXTENDS BEYOND PROJECTIONS. OTHERWISE, METAL FLASHING WITH A DRIP EDGE IS RECOMMENDED.
 - C. HORIZONTAL PROJECTIONS SHALL BE DESIGNED, CONSISTENT WITH GOVERNING CODES AND STANDARDS, SUCH THAT THESE WILL NOT BE CONFIGURED OR CONSTRUCTED AS ROOFING OR FINISH MEMBRANES.
5. AESTHETIC REVEALS:
- A. AESTHETIC REVEALS MAY BE CUT INTO THE INSULATION LAYER, PROVIDED THE MINIMUM CONTINUOUS LAYER OF INSULATION IS NOT LESS THAN 19 MM (3/4 INCH).
 - B. AESTHETIC REVEALS SHALL BE INSTALLED CONTINUOUSLY UNTIL A WORKABLE FINISH IS OBTAINED.
 - C. DUROCK RECOMMENDS THAT AESTHETIC REVEALS NOT BE JOINED WITH THE CORNERS OF THROUGH-WALL PENETRATIONS SUCH AS WINDOWS AND DOORS.
6. FLASHING
- A. CORROSION RESISTANT FLASHING MUST BE INSTALLED ACCORDING TO THE REQUIREMENTS OF SECTION 07 60 00 IN GENERAL CONFORMANCE WITH PART 5 IN THE PROVINCIAL/NATIONAL BUILDING CODE.
 - B. FLASHING MUST BE DESIGNED AND INSTALLED BY OTHERS, SLOPING OUTWARD WITH Drip EDGES TO DIRECT PRECIPITATION TO THE EXTERIOR, AND MUST BE PROVIDED AT THE TOP OF PARAPET WALLS AND OTHER SIMILAR POINTS OF TERMINATION.
7. PRESSURE MODERATION
- A. THE CAVITY IN THE DUROCK PUCCS SHALL BE CLOSED AT ALL EXTERIOR CORNERS BY THE INSTALLATION OF A 500 MM (20 INCH) DEEP ADHESIVE ON EITHER SIDE OF THE CORNER, AT THE TIME THE INSULATION IS BEING INSTALLED.
 - B. VENTING FOR PRESSURE EQUALIZATION MODERATION SHALL BE SIZED ACCORDING TO THE METHODS DEVELOPED BY THE NATIONAL RESEARCH COUNCIL OF CANADA:
 - i. A. NET VENT AREA = CAVITY VOLUME (M³/50 M) FOR DYNAMIC WIND LOADING
 - ii. B. NET VENT AREA = ESTIMATED AIR LEAKAGE (CM³/M²) X 20 FOR STATIC WIND
 - C. THE CAVITY IN THE DUROCK PUCCS HAS A NOMINAL VOLUME OF:
 - i. A. 3.72M CM³/M² (21.2 IN³/FT²) WHEN INSTALLED WITH THE ONE-STEP BARRIER/ADHESIVE.
 - ii. B. 4.78M CM³/M² (27.1 IN³/FT²) WHEN INSTALLED WITH THE TWO-STEP BARRIER/ADHESIVE.

14. PERFORMANCE REQUIREMENTS
1. DUROCK PUCCS TESTED ACCORDING TO THE CMC TECHNICAL GUIDE FOR EPS, EVALUATION REPORT NO. 12989-18, AS DESIGNATED BY SENTENCE 2.8.1.1(1) IN THE PROVINCIAL/NATIONAL BUILDING CODE.
 2. DUROCK PUCCS (WITH INSULATION UP TO 152 MM THICK) TESTED IN CONFORMANCE WITH CAN/ULC-S101, FIRE ENDURANCE TESTS OF BUILDING CONSTRUCTION AND MATERIALS; AS REQUIRED BY ARTICLE 3.2.3.8 IN THE PROVINCIAL/NATIONAL BUILDING CODE.
 3. DUROCK BASE COAT TESTED IN CONFORMANCE WITH CAN/ULC-S114, NONCOMBUSTIBLE MATERIAL; AS REQUIRED BY SENTENCE 3.2.3.8.1(b) IN THE PROVINCIAL/NATIONAL BUILDING CODE.
 4. DUROCK PUCCS (WITH INSULATION UP TO 127 MM THICK) TESTED IN CONFORMANCE WITH CAN/ULC-S134, FIRE TEST OF EXTERIOR WALL ASSEMBLIES; AS REQUIRED BY ARTICLE 3.12.5.5 IN THE PROVINCIAL/NATIONAL BUILDING CODE.
 5. DUROCK AIR/MOISTURE BARRIER TESTED ACCORDING TO ASTM E283 - AIR LEAKAGE RATE NOT GREATER THAN 0.02 L/(S/M²) AT 75 PA, AS REQUIRED BY SENTENCE 5.4.1.2(1) IN THE PROVINCIAL/NATIONAL BUILDING CODE.
 6. DUROCK VAPOUR BARRIER TESTED ACCORDING TO ASTM E96-95 - VAPOUR PERMEANCE NOT GREATER THAN 10 G/(PA.S.M²), AS REQUIRED BY SENTENCE 5.4.1.2(2) IN THE PROVINCIAL/NATIONAL BUILDING CODE.
 7. WIND LOAD RESISTANCE OF DUROCK PUCCS IS ACHIEVED VIA ATTACHMENT TO THE SUBSTRATE. HENCE, THE SUBSTRATE MUST BE DESIGNED WITHSTAND THE ANTICIPATED WIND LOADS. REFER TO STRUCTURAL DRAWINGS.

15. SUBMITTALS

1. UPON REQUEST, DUROCK WILL SUPPLY FINISH COAT SAMPLES, APPROXIMATELY 200 X 200 MM (8 X 8 INCHES), PROVIDING REPRESENTATION OF THE TEXTURE AND COLOUR.

16. QUALITY ASSURANCE

1. EPS MANUFACTURER SHALL BE A MEMBER IN GOOD STANDING OF THE EPS COUNCIL OF CANADA AND CERTIFIED TO THE EPS CAP.
2. EPS MANUFACTURER SHALL POSSESS A CMC EVALUATION REPORT FOR ITS PRIMARY LINE OF PRODUCT.
3. EPS APPLICATION SHALL BE KNOWLEDGEABLE AND EXPERIENCED IN EPS INSTALLATION.
4. EPS APPLICATION SHALL INSTALL DUROCK PUCCS ACCORDING TO DUROCK'S REQUIREMENTS.

17. DELIVERY, STORAGE, HANDLING

1. ALL MATERIALS AND COMPONENTS SHALL BE:
 - A. SUPPLIED BY DUROCK ALFALCON INTERNATIONAL LIMITED OR ITS APPOINTED DISTRIBUTORS IN THE ORIGINAL, UNOPENED PACKAGING WITH LABELS CLEARLY IDENTIFYING EACH COMPONENT.
 - B. INSPECTED UPON DELIVERY, AND ANY DEFECTIVE MATERIALS AND/OR COMPONENTS ARE NOT TO BE USED.
 - C. STORED OFF THE GROUND, UNDER PROTECTIVE COVER, AWAY FROM DIRECT SUNLIGHT AND KEPT DRY.
2. ALL WATER-BASED MATERIALS, SUPPLIED IN PLASTIC PAILS, ARE TO BE KEPT ABOVE 4.0C (40°F) AND SHOULD EXCEED 100°F.
3. ALL DRY-BASED MATERIALS SHALL BE KEPT DRY AND PROTECTED FROM HIGH HUMIDITY AND MOISTURE.

18. SITE CONDITIONS

1. SURFACE AND AMBIENT CONDITIONS FOR APPLICATION OF WET-STATE-MATERIALS MUST BE KEPT ABOVE 4.0C (40°F).
2. ADHESIVES APPLIED BELOW 10.0C (50°F) SHALL BE PROTECTED FOR NOT LESS THAN 48 HOURS.
3. FINISH COATS APPLIED IN HIGH HUMIDITY CONDITIONS WILL TAKE LONGER THAN 24 HOURS TO DRY. IF SUCH CONDITIONS OCCUR, PROVIDE SUFFICIENT HEAT TO REDUCE THE HUMIDITY, OR PROVIDE PROTECTION LONG ENOUGH FOR FINISH COATS TO DRY COMPLETELY.
4. WET-STATE-MATERIALS SHALL NOT BE APPLIED IN DIRECT SUNLIGHT IN TEMPERATURES EXCEEDING 30.0C (86°F) WITHOUT PROTECTIVE COVER.
5. ALL WORK SHALL BE PROTECTED FROM RAIN, SNOW, HAIL, AND WIND EXCEEDING 25 KM/H (15 MPH) FOR NOT LESS THAN 24 HOURS AFTER WET MATERIAL APPLICATION.
6. DO NOT APPLY MATERIALS IN WEATHER CONDITIONS THAT WILL CAUSE ADVERSE EFFECTS TO PERFORMANCE.

19. WARRANTY

- GENERAL CONTRACTOR TO PROVIDE LIMITED MATERIALS TEN YEAR WARRANTY INDICATING THE FOLLOWING:
1. PROJECT TITLE
 1. SYSTEM INSTALLED
 1. ADDRESS
 1. SQUARE FOOTAGE
 1. BUILDING OWNER'S NAME AND ADDRESS
 1. APPLICATION'S NAME
 1. WARRANTY NUMBER
 1. EFFECTIVE DATE
2. WITH THE FOLLOWING WORDING:

DUROCK ALFALCON INTERNATIONAL LIMITED ("DUROCK") HEREBY WARRANTS THAT THE PUCC SYSTEM COMPONENTS SOLD OR MANUFACTURED BY IT SHALL BE FREE FROM DEFECTS IN THE MANUFACTURE OF THE MATERIALS WHEN INSTALLED ACCORDING WITH THE CURRENT PUBLISHED DUROCK SPECIFICATIONS, DETAILS AND APPLICATION INSTRUCTIONS FOR THIS SYSTEM BY AN APPLICATION/CONTRACTOR FIRM THAT HAS BEEN CERTIFIED BY DUROCK, WILL FOR A PERIOD OF 10 YEARS FROM THE DATE OF SUBSTANTIAL COMPLETION OF THE PROJECT EFFECTIVELY DRAIN ANY MOISTURE THAT SHOULD ENTER THE CAVITY BETWEEN THE INSULATION BOARD AND THE REQUIRED WEATHER BARRIER AS DELINEATED IN THE ARCHITECTURAL DRAWINGS.

IT IS SPECIFICALLY UNDERSTOOD AND AGREED THAT NO WARRANTY WHATSOEVER IS MADE WITH RESPECT TO (i) OTHERS AS PRODUCED BY OTHER MANUFACTURERS OR MATERIALS PRODUCED BY DUROCK BUT NOT SPECIFICALLY SOLD OR MANUFACTURED BY DUROCK, OR (ii) SUCH MATERIALS BEAR DUROCK'S NAME OR LOGO, NOR (iii) ANY SEALANT MATERIALS. FURTHER, THIS WARRANTY IS VOID IF THE DUROCK MATERIALS ARE INTERMIXED WITH OTHER CHEMICALS OR MATERIALS NOT SPECIFICALLY REQUIRED BY DUROCK'S SPECIFICATIONS OR APPLICATION INSTRUCTIONS.

FURTHER NO WARRANTY WHATSOEVER IS MADE FOR DAMAGE CAUSED IN WHOLE OR PART BY ACTS OF GOD OR NATURAL PHENOMENON, SUCH AS BUT NOT LIMITED TO FALLING OBJECTS, FIRE, EARTHQUAKES, FLOODS, PESTS, CHEMICAL FUMES OR POLLUTANTS IN THE AIR, OR BETWEEN DUROCK MATERIALS AND NON-DUROCK MATERIALS. NEITHER DUROCK NOR ARCHITECTURE, ENGINEERING, INSUFFICIENT OR DEFECTIVE WATERPROOFING, OR DEFECTIVE DRAINAGE, OR BETWEEN DUROCK MATERIALS AND NON-DUROCK MATERIALS, NOR DEFECTIVE OR IMPROPER WORKMANSHIP BY THE APPLICATION, NOR OTHER DAMAGE OR INJURY CAUSED BY DEFECTS IN DUROCK'S MATERIALS AS COVERED UNDER THIS WARRANTY.

THE INSURANCE POLICY OF THE CONTRACTOR SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR. DUROCK WILL NOT MAKE ANY OBLIGATIONS UNDER THIS WARRANTY UNLESS THE OWNER NOTICES DUROCK ALFALCON INTERNATIONAL LIMITED, 1018 RUTHERFORD ROAD, WOODBRIDGE, ONTARIO L4R 4A4, ATTENTION: VICE PRESIDENT, IN WRITING, WITHIN THIRTY (30) DAYS OF DISCOVERY OF ALLEGED DEFECTS. DUROCK SHALL BE ALLOWED A REASONABLE PERIOD OF TIME TO INVESTIGATE AND DETERMINE THE CAUSE OF THE DEFECT. THE OWNER SHALL PROVIDE AND CAUSE ANY TEMPORARY REPAIRS TO BE ACCOMPLISHED IN A TIMELY MANNER TO PREVENT FURTHER DAMAGE TO THE STRUCTURE OR CONTENTS OF THE BUILDING UNTIL THE CAUSE OF THE DEFECT IS DETERMINED AND PERMANENT REPAIR RECOMMENDATIONS MAY BE MADE.

DUROCK SHALL NOT MAKE ANY OBLIGATIONS HEREUNDER UNLESS THE SYSTEM SHALL HAVE BEEN MAINTAINED BY THE OWNER WITH REASONABLE CARE. THIS WARRANTY SHALL BE INTERPRETED UNDER THE LAWS OF THE PROVINCE WHERE WORK IS BEING CONDUCTED.

PART 2 - MATERIALS

1. DUROCK ALFALCON INTERNATIONAL LIMITED, OR ITS APPOINTED DISTRIBUTORS, SHALL SUPPLY ALL THE MATERIALS AND COMPONENTS FOR THE DUROCK PUCCS.
2. SUBSTITUTION OF MATERIALS OR COMPONENTS SHALL VOID THE MANUFACTURER'S WARRANTY.

2.2. MATERIALS

1. AIR/MOISTURE BARRIERS:
 - A. AIR/MOISTURE BARRIER AND ADHESIVE FOR NON-COMBUSTIBLE CONSTRUCTION - WATER-BASED ACRYLIC DISPERSION THAT IS FIELD MIXED WITH TYPE 10, 20, OR 30 PORTLAND CEMENT, MIXED TOGETHER 1:1 BY WEIGHT, APPLIED WITH STAINLESS STEEL TROWEL OR SPRAY EQUIPMENT.
 - B. DUROCK VAPOUR BARRIER - AIR/MOISTURE BARRIER AND ADHESIVE FOR NON-COMBUSTIBLE CONSTRUCTION - WATER-BASED STYRENE-BUTADIENE DISPERSION THAT IS FACTORY MIXED, APPLIED WITH STAINLESS STEEL TROWEL OR SPRAY EQUIPMENT.
 - C. DRAINAGE ACCESSORIES:
 - i. DUROCK UNI-TRACK - POLYVINYL CHLORIDE EXTRUSION PROVIDING DRAINAGE AT HORIZONTAL TERMINATIONS.
 - ii. INSULATION:
 - i. TYPE 1: [R3 0.65/25MM (R 3.7/[NCH])] OR TYPE 2: [R3 0.70/25MM (R 4.0/[NCH])]
 - ii. EXPANDED POLYSTYRENE (EPS) COMPLIANT WITH ULC-S701, THAT IS:
 - A. MADE BY A MANUFACTURER APPROVED BY DUROCK.
 - B. PACKAGED IN BAGS WITH DUROCK'S LOGO PLAINLY VISIBLE.
 - C. AGED AND CUT ACCORDING TO THE REQUIREMENTS OF ASTM E2430, NOMINAL SIZE OF SHEETS BEING HEIGHT AND WIDTH OF 610 X 1219 MM (24 X 48 INCHES).
 - D. MADE OF 100% VIRGIN POLYSTYRENE RESIN.
 - E. AVAILABLE THICKNESSES: 38, 51, 64, 76, 89, 102, 114, 127, 140, & 152 MM (1 1/2, 2, 2 1/2, 3, 3 1/2, 4, 4 1/2, 5, 5 1/2, & 6 INCH). NOTE: 140 & 152 MM (5 1/2 & 6 INCH) THICKNESSES ARE NOT AVAILABLE FOR DUROCK PUCCS REQUIRED TO COMPLY WITH CAN/ULC-S134. REFER TO "1.4 PERFORMANCE REQUIREMENTS".
 - iii. DUROCK'S INSULATION, S ROLLER-CUT DROPPING ON EACH SHEET OF 610 X 1219 MM (24 X 48 INCHES):
 - i. TYPE 1: 10.5/152 MM DEEP BY 16 MM (5/32 INCH) WIDE IN 5 MM (2 INCH) ROLL.
 - ii. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - iii. SPRAY-IN-PLACE POLYURETHANE FOAM, COMPLIANT WITH ULC-S701-1.
 - iv. INSULATION BOARD JOINTS AS A GAP FILLING MATERIAL.
 2. DUROCK PUCCS INSULATION:
 - A. 100% VIRGIN POLYSTYRENE RESIN.
 - B. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - C. DRAINAGE ACCESSORIES:
 - i. DUROCK UNI-TRACK - POLYVINYL CHLORIDE EXTRUSION PROVIDING DRAINAGE AT HORIZONTAL TERMINATIONS.
 - ii. INSULATION:
 - i. TYPE 1: [R3 0.65/25MM (R 3.7/[NCH])] OR TYPE 2: [R3 0.70/25MM (R 4.0/[NCH])]
 - ii. EXPANDED POLYSTYRENE (EPS) COMPLIANT WITH ULC-S701, THAT IS:
 - A. MADE BY A MANUFACTURER APPROVED BY DUROCK.
 - B. PACKAGED IN BAGS WITH DUROCK'S LOGO PLAINLY VISIBLE.
 - C. AGED AND CUT ACCORDING TO THE REQUIREMENTS OF ASTM E2430, NOMINAL SIZE OF SHEETS BEING HEIGHT AND WIDTH OF 610 X 1219 MM (24 X 48 INCHES).
 - D. MADE OF 100% VIRGIN POLYSTYRENE RESIN.
 - E. AVAILABLE THICKNESSES: 38, 51, 64, 76, 89, 102, 114, 127, 140, & 152 MM (1 1/2, 2, 2 1/2, 3, 3 1/2, 4, 4 1/2, 5, 5 1/2, & 6 INCH). NOTE: 140 & 152 MM (5 1/2 & 6 INCH) THICKNESSES ARE NOT AVAILABLE FOR DUROCK PUCCS REQUIRED TO COMPLY WITH CAN/ULC-S134. REFER TO "1.4 PERFORMANCE REQUIREMENTS".
 - iii. DUROCK'S INSULATION, S ROLLER-CUT DROPPING ON EACH SHEET OF 610 X 1219 MM (24 X 48 INCHES):
 - i. TYPE 1: 10.5/152 MM DEEP BY 16 MM (5/32 INCH) WIDE IN 5 MM (2 INCH) ROLL.
 - ii. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - iii. SPRAY-IN-PLACE POLYURETHANE FOAM, COMPLIANT WITH ULC-S701-1.
 - iv. INSULATION BOARD JOINTS AS A GAP FILLING MATERIAL.

1. DUROCK PUCCS INSULATION:
 - A. 100% VIRGIN POLYSTYRENE RESIN.
 - B. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - C. DRAINAGE ACCESSORIES:
 - i. DUROCK UNI-TRACK - POLYVINYL CHLORIDE EXTRUSION PROVIDING DRAINAGE AT HORIZONTAL TERMINATIONS.
 - ii. INSULATION:
 - i. TYPE 1: [R3 0.65/25MM (R 3.7/[NCH])] OR TYPE 2: [R3 0.70/25MM (R 4.0/[NCH])]
 - ii. EXPANDED POLYSTYRENE (EPS) COMPLIANT WITH ULC-S701, THAT IS:
 - A. MADE BY A MANUFACTURER APPROVED BY DUROCK.
 - B. PACKAGED IN BAGS WITH DUROCK'S LOGO PLAINLY VISIBLE.
 - C. AGED AND CUT ACCORDING TO THE REQUIREMENTS OF ASTM E2430, NOMINAL SIZE OF SHEETS BEING HEIGHT AND WIDTH OF 610 X 1219 MM (24 X 48 INCHES).
 - D. MADE OF 100% VIRGIN POLYSTYRENE RESIN.
 - E. AVAILABLE THICKNESSES: 38, 51, 64, 76, 89, 102, 114, 127, 140, & 152 MM (1 1/2, 2, 2 1/2, 3, 3 1/2, 4, 4 1/2, 5, 5 1/2, & 6 INCH). NOTE: 140 & 152 MM (5 1/2 & 6 INCH) THICKNESSES ARE NOT AVAILABLE FOR DUROCK PUCCS REQUIRED TO COMPLY WITH CAN/ULC-S134. REFER TO "1.4 PERFORMANCE REQUIREMENTS".
 - iii. DUROCK'S INSULATION, S ROLLER-CUT DROPPING ON EACH SHEET OF 610 X 1219 MM (24 X 48 INCHES):
 - i. TYPE 1: 10.5/152 MM DEEP BY 16 MM (5/32 INCH) WIDE IN 5 MM (2 INCH) ROLL.
 - ii. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - iii. SPRAY-IN-PLACE POLYURETHANE FOAM, COMPLIANT WITH ULC-S701-1.
 - iv. INSULATION BOARD JOINTS AS A GAP FILLING MATERIAL.

1. DUROCK PUCCS INSULATION:
 - A. 100% VIRGIN POLYSTYRENE RESIN.
 - B. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - C. DRAINAGE ACCESSORIES:
 - i. DUROCK UNI-TRACK - POLYVINYL CHLORIDE EXTRUSION PROVIDING DRAINAGE AT HORIZONTAL TERMINATIONS.
 - ii. INSULATION:
 - i. TYPE 1: [R3 0.65/25MM (R 3.7/[NCH])] OR TYPE 2: [R3 0.70/25MM (R 4.0/[NCH])]
 - ii. EXPANDED POLYSTYRENE (EPS) COMPLIANT WITH ULC-S701, THAT IS:
 - A. MADE BY A MANUFACTURER APPROVED BY DUROCK.
 - B. PACKAGED IN BAGS WITH DUROCK'S LOGO PLAINLY VISIBLE.
 - C. AGED AND CUT ACCORDING TO THE REQUIREMENTS OF ASTM E2430, NOMINAL SIZE OF SHEETS BEING HEIGHT AND WIDTH OF 610 X 1219 MM (24 X 48 INCHES).
 - D. MADE OF 100% VIRGIN POLYSTYRENE RESIN.
 - E. AVAILABLE THICKNESSES: 38, 51, 64, 76, 89, 102, 114, 127, 140, & 152 MM (1 1/2, 2, 2 1/2, 3, 3 1/2, 4, 4 1/2, 5, 5 1/2, & 6 INCH). NOTE: 140 & 152 MM (5 1/2 & 6 INCH) THICKNESSES ARE NOT AVAILABLE FOR DUROCK PUCCS REQUIRED TO COMPLY WITH CAN/ULC-S134. REFER TO "1.4 PERFORMANCE REQUIREMENTS".
 - iii. DUROCK'S INSULATION, S ROLLER-CUT DROPPING ON EACH SHEET OF 610 X 1219 MM (24 X 48 INCHES):
 - i. TYPE 1: 10.5/152 MM DEEP BY 16 MM (5/32 INCH) WIDE IN 5 MM (2 INCH) ROLL.
 - ii. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - iii. SPRAY-IN-PLACE POLYURETHANE FOAM, COMPLIANT WITH ULC-S701-1.
 - iv. INSULATION BOARD JOINTS AS A GAP FILLING MATERIAL.

1. DUROCK PUCCS INSULATION:
 - A. 100% VIRGIN POLYSTYRENE RESIN.
 - B. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - C. DRAINAGE ACCESSORIES:
 - i. DUROCK UNI-TRACK - POLYVINYL CHLORIDE EXTRUSION PROVIDING DRAINAGE AT HORIZONTAL TERMINATIONS.
 - ii. INSULATION:
 - i. TYPE 1: [R3 0.65/25MM (R 3.7/[NCH])] OR TYPE 2: [R3 0.70/25MM (R 4.0/[NCH])]
 - ii. EXPANDED POLYSTYRENE (EPS) COMPLIANT WITH ULC-S701, THAT IS:
 - A. MADE BY A MANUFACTURER APPROVED BY DUROCK.
 - B. PACKAGED IN BAGS WITH DUROCK'S LOGO PLAINLY VISIBLE.
 - C. AGED AND CUT ACCORDING TO THE REQUIREMENTS OF ASTM E2430, NOMINAL SIZE OF SHEETS BEING HEIGHT AND WIDTH OF 610 X 1219 MM (24 X 48 INCHES).
 - D. MADE OF 100% VIRGIN POLYSTYRENE RESIN.
 - E. AVAILABLE THICKNESSES: 38, 51, 64, 76, 89, 102, 114, 127, 140, & 152 MM (1 1/2, 2, 2 1/2, 3, 3 1/2, 4, 4 1/2, 5, 5 1/2, & 6 INCH). NOTE: 140 & 152 MM (5 1/2 & 6 INCH) THICKNESSES ARE NOT AVAILABLE FOR DUROCK PUCCS REQUIRED TO COMPLY WITH CAN/ULC-S134. REFER TO "1.4 PERFORMANCE REQUIREMENTS".
 - iii. DUROCK'S INSULATION, S ROLLER-CUT DROPPING ON EACH SHEET OF 610 X 1219 MM (24 X 48 INCHES):
 - i. TYPE 1: 10.5/152 MM DEEP BY 16 MM (5/32 INCH) WIDE IN 5 MM (2 INCH) ROLL.
 - ii. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - iii. SPRAY-IN-PLACE POLYURETHANE FOAM, COMPLIANT WITH ULC-S701-1.
 - iv. INSULATION BOARD JOINTS AS A GAP FILLING MATERIAL.

1. DUROCK PUCCS INSULATION:
 - A. 100% VIRGIN POLYSTYRENE RESIN.
 - B. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - C. DRAINAGE ACCESSORIES:
 - i. DUROCK UNI-TRACK - POLYVINYL CHLORIDE EXTRUSION PROVIDING DRAINAGE AT HORIZONTAL TERMINATIONS.
 - ii. INSULATION:
 - i. TYPE 1: [R3 0.65/25MM (R 3.7/[NCH])] OR TYPE 2: [R3 0.70/25MM (R 4.0/[NCH])]
 - ii. EXPANDED POLYSTYRENE (EPS) COMPLIANT WITH ULC-S701, THAT IS:
 - A. MADE BY A MANUFACTURER APPROVED BY DUROCK.
 - B. PACKAGED IN BAGS WITH DUROCK'S LOGO PLAINLY VISIBLE.
 - C. AGED AND CUT ACCORDING TO THE REQUIREMENTS OF ASTM E2430, NOMINAL SIZE OF SHEETS BEING HEIGHT AND WIDTH OF 610 X 1219 MM (24 X 48 INCHES).
 - D. MADE OF 100% VIRGIN POLYSTYRENE RESIN.
 - E. AVAILABLE THICKNESSES: 38, 51, 64, 76, 89, 102, 114, 127, 140, & 152 MM (1 1/2, 2, 2 1/2, 3, 3 1/2, 4, 4 1/2, 5, 5 1/2, & 6 INCH). NOTE: 140 & 152 MM (5 1/2 & 6 INCH) THICKNESSES ARE NOT AVAILABLE FOR DUROCK PUCCS REQUIRED TO COMPLY WITH CAN/ULC-S134. REFER TO "1.4 PERFORMANCE REQUIREMENTS".
 - iii. DUROCK'S INSULATION, S ROLLER-CUT DROPPING ON EACH SHEET OF 610 X 1219 MM (24 X 48 INCHES):
 - i. TYPE 1: 10.5/152 MM DEEP BY 16 MM (5/32 INCH) WIDE IN 5 MM (2 INCH) ROLL.
 - ii. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - iii. SPRAY-IN-PLACE POLYURETHANE FOAM, COMPLIANT WITH ULC-S701-1.
 - iv. INSULATION BOARD JOINTS AS A GAP FILLING MATERIAL.

1. DUROCK PUCCS INSULATION:
 - A. 100% VIRGIN POLYSTYRENE RESIN.
 - B. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - C. DRAINAGE ACCESSORIES:
 - i. DUROCK UNI-TRACK - POLYVINYL CHLORIDE EXTRUSION PROVIDING DRAINAGE AT HORIZONTAL TERMINATIONS.
 - ii. INSULATION:
 - i. TYPE 1: [R3 0.65/25MM (R 3.7/[NCH])] OR TYPE 2: [R3 0.70/25MM (R 4.0/[NCH])]
 - ii. EXPANDED POLYSTYRENE (EPS) COMPLIANT WITH ULC-S701, THAT IS:
 - A. MADE BY A MANUFACTURER APPROVED BY DUROCK.
 - B. PACKAGED IN BAGS WITH DUROCK'S LOGO PLAINLY VISIBLE.
 - C. AGED AND CUT ACCORDING TO THE REQUIREMENTS OF ASTM E2430, NOMINAL SIZE OF SHEETS BEING HEIGHT AND WIDTH OF 610 X 1219 MM (24 X 48 INCHES).
 - D. MADE OF 100% VIRGIN POLYSTYRENE RESIN.
 - E. AVAILABLE THICKNESSES: 38, 51, 64, 76, 89, 102, 114, 127, 140, & 152 MM (1 1/2, 2, 2 1/2, 3, 3 1/2, 4, 4 1/2, 5, 5 1/2, & 6 INCH). NOTE: 140 & 152 MM (5 1/2 & 6 INCH) THICKNESSES ARE NOT AVAILABLE FOR DUROCK PUCCS REQUIRED TO COMPLY WITH CAN/ULC-S134. REFER TO "1.4 PERFORMANCE REQUIREMENTS".
 - iii. DUROCK'S INSULATION, S ROLLER-CUT DROPPING ON EACH SHEET OF 610 X 1219 MM (24 X 48 INCHES):
 - i. TYPE 1: 10.5/152 MM DEEP BY 16 MM (5/32 INCH) WIDE IN 5 MM (2 INCH) ROLL.
 - ii. SEVENTY-TWO ORLES ARE CUT EQUIDISTANTLY ON 102 MM (4 INCHES) VERTICAL AND HORIZONTAL SPACINGS.
 - iii. SPRAY-IN-PLACE POLYURETHANE FOAM, COMPLIANT WITH ULC-S701-1.
 - iv. INSULATION BOARD JOINTS AS A GAP FILLING MATERIAL.

2.3. MIXING

1. ALL DUROCK WATER-BASED PRODUCTS REQUIRE MIXING WITH A MEDIUM DUTY POWER-DRILL (400 - 500 RPM) AND STAINLESS STEEL OR CORROSION RESISTANT PADDLE-MIXING-BLADE.
2. DUROCK WATER-BASED PAAL-PACKAGED PRODUCTS TO BE MIXED WITH PORTLAND CEMENT TO BE MIXED TO A UNIFORM CONSISTENCY PRIOR TO MIXING WITH PORTLAND CEMENT.
3. PREP COAT - GRADUALLY ADD 15 KG (33 LBS) OF TYPE 10, 20, OR 30 PORTLAND CEMENT TO ONE-HALF PAIL OF PREP COAT MIXING CONTINUOUSLY UNTIL A WORKABLE CONSISTENCY IS ATTAINED. LOO APPROXIMATELY 5 MINUTES THEN MIX AGAIN TO TEMPER THE MIX AND INCREASE THE POT LIFE, ADDING UP TO 250 ML (8 OZ) OF POTABLE WATER IF REQUIRED TO ADJUST VISCOSITY.
4. CEMENT BEAR - GRADUALLY ADD 13.5 KG (30 LBS) OF TYPE 10, 20, OR 30 PORTLAND CEMENT TO ONE-HALF PAIL OF CEMENT BEAR MIXING CONTINUOUSLY UNTIL A WORKABLE CONSISTENCY IS ATTAINED. LET THE MIXTURE STAND FOR APPROXIMATELY 5 MINUTES, THEN TEMPER THE MIX AND INCREASE THE POT LIFE, ADDING UP TO 250 ML (8 OZ) OF POTABLE WATER IF REQUIRED TO ADJUST VISCOSITY.
5. DUROCK NON-CEMENTITIOUS WATER-BASED PAAL-PACKAGED FACTORY-MIXED PRODUCTS ARE REQUIRED TO BE MIXED TO A UNIFORM CONSISTENCY PRIOR TO APPLICATION.
6. DUROCK HIGH IMPACT MESH 15 - NOMINAL 523 G/M² (5.4 OZ/FT²) WEIGHT, SUPPLIED IN 965 MM (38 INCHES) WIDE BY 22.9 M (75 FEET) LONG ROLLS.
7. DUROCK HIGH IMPACT MESH 21 - NOMINAL 712 G/M² (21.0 OZ/FT²) WEIGHT, SUPPLIED IN 965 MM (38 INCHES) WIDE BY 22.9 M (75 FEET) LONG ROLLS.
8. DUROCK FIBRE MESH 141 - SELF-ADHERING NOMINAL 88 G/M² (2.6 OZ/FT²) WEIGHT, SUPPLIED IN 76 MM (3 INCHES) WIDE BY 45.7 M (150 FEET) LONG ROLLS.
9. FINISH COAT:
 - A. DUROCK BASE PRIMER - WATER-BASED, COLOR-PIGMENTED ACRYLIC DISPERSION USED AS A PRIMER FOR DUROCK FINISHES, APPLIED BY ROLLER OR BRUSH.
 - B. DUROCK ROLL-ON